

Report No.: 52.05519 PURE Downlight

Test Time: 2023-06-03 20:24

## Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 28D

Current: 0.041 A

Power Factor: 0.938

Voltage: 224.7 V

Power: 8.60 W

## Photometric Results

CIE Class: Direct

Measurement Flux: 368.6 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H27.8

Vertical Diffuse Angle(50%): V27.8

Luminaire Efficacy Rating (LER): 43

Max. Intensity: 1183.55 cd

Total Rated Lamp Lumens: 368.6 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1183.54 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

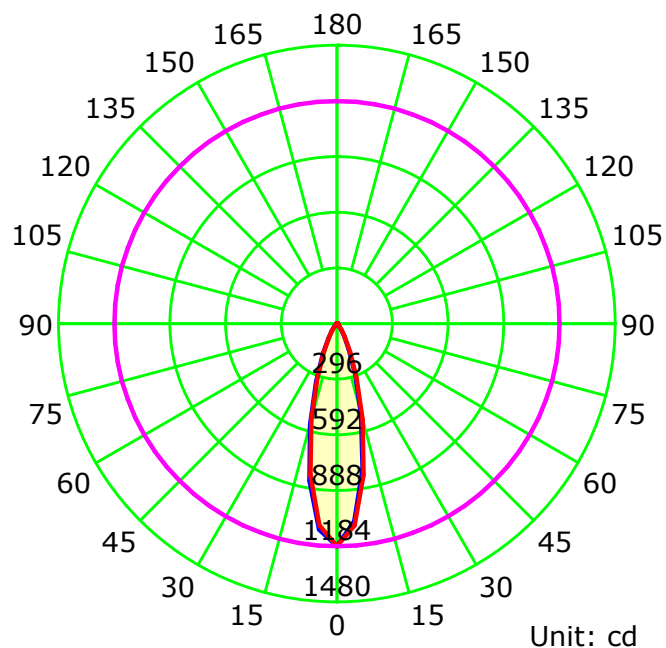

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

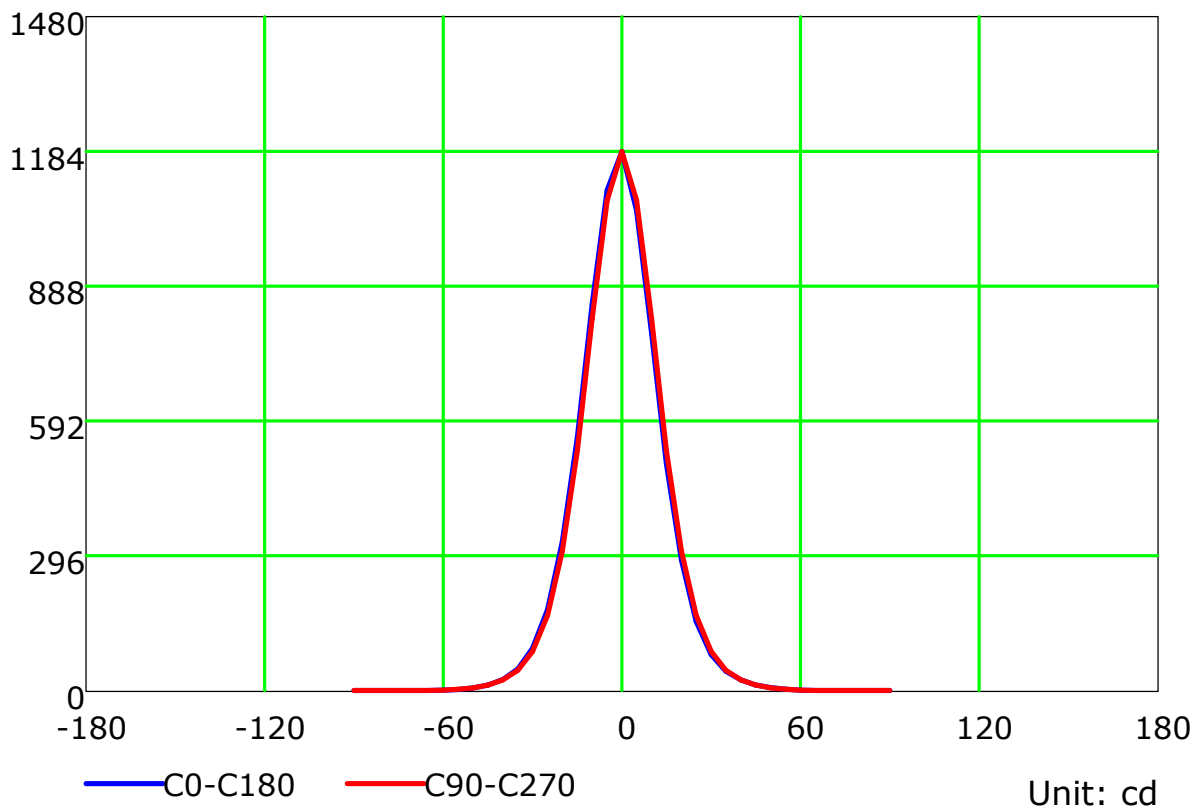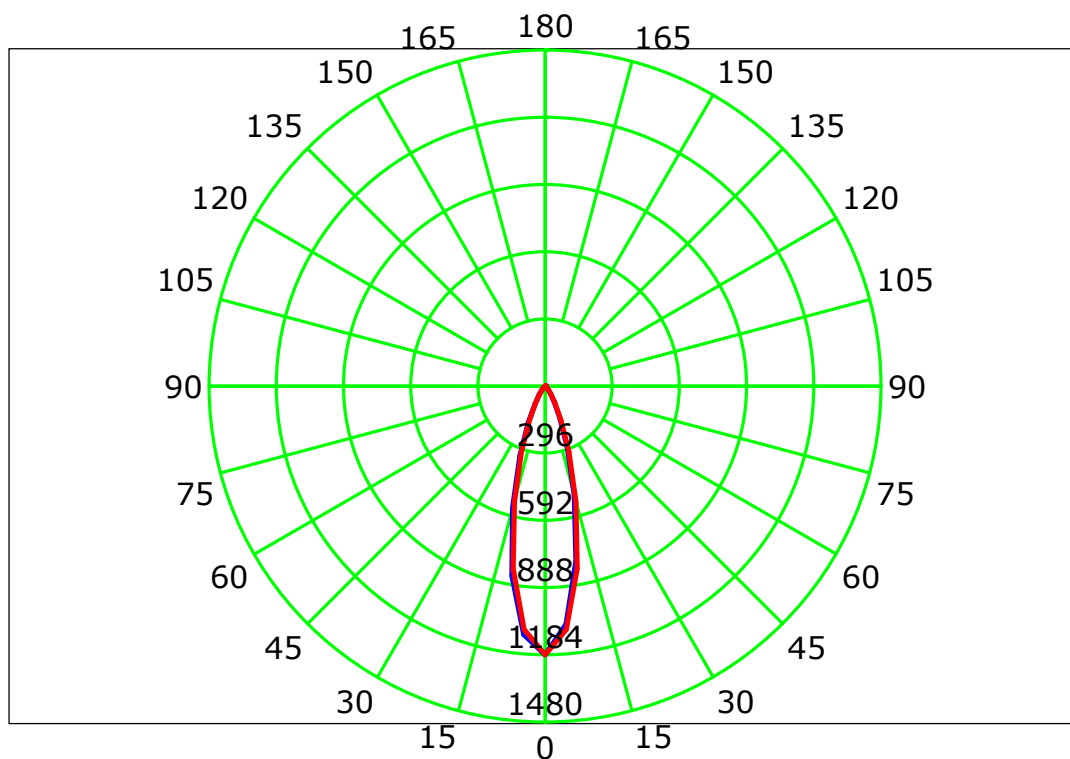

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

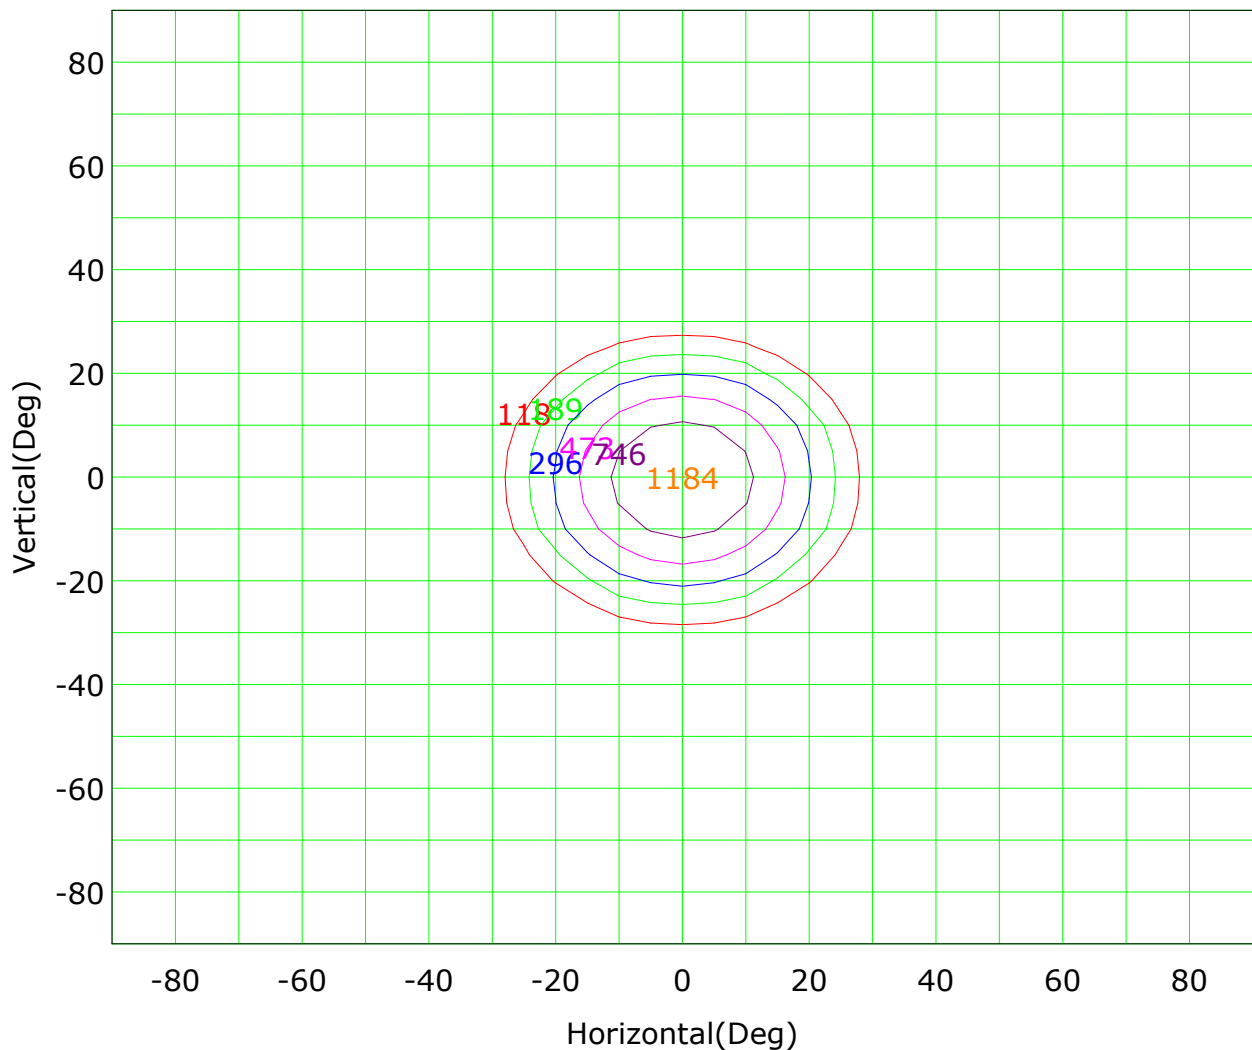

Imax (100%): 1184 cd

( 10%): 118 cd	( 16%): 189 cd
( 25%): 296 cd	( 40%): 473 cd
( 63%): 746 cd	(100%): 1184 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

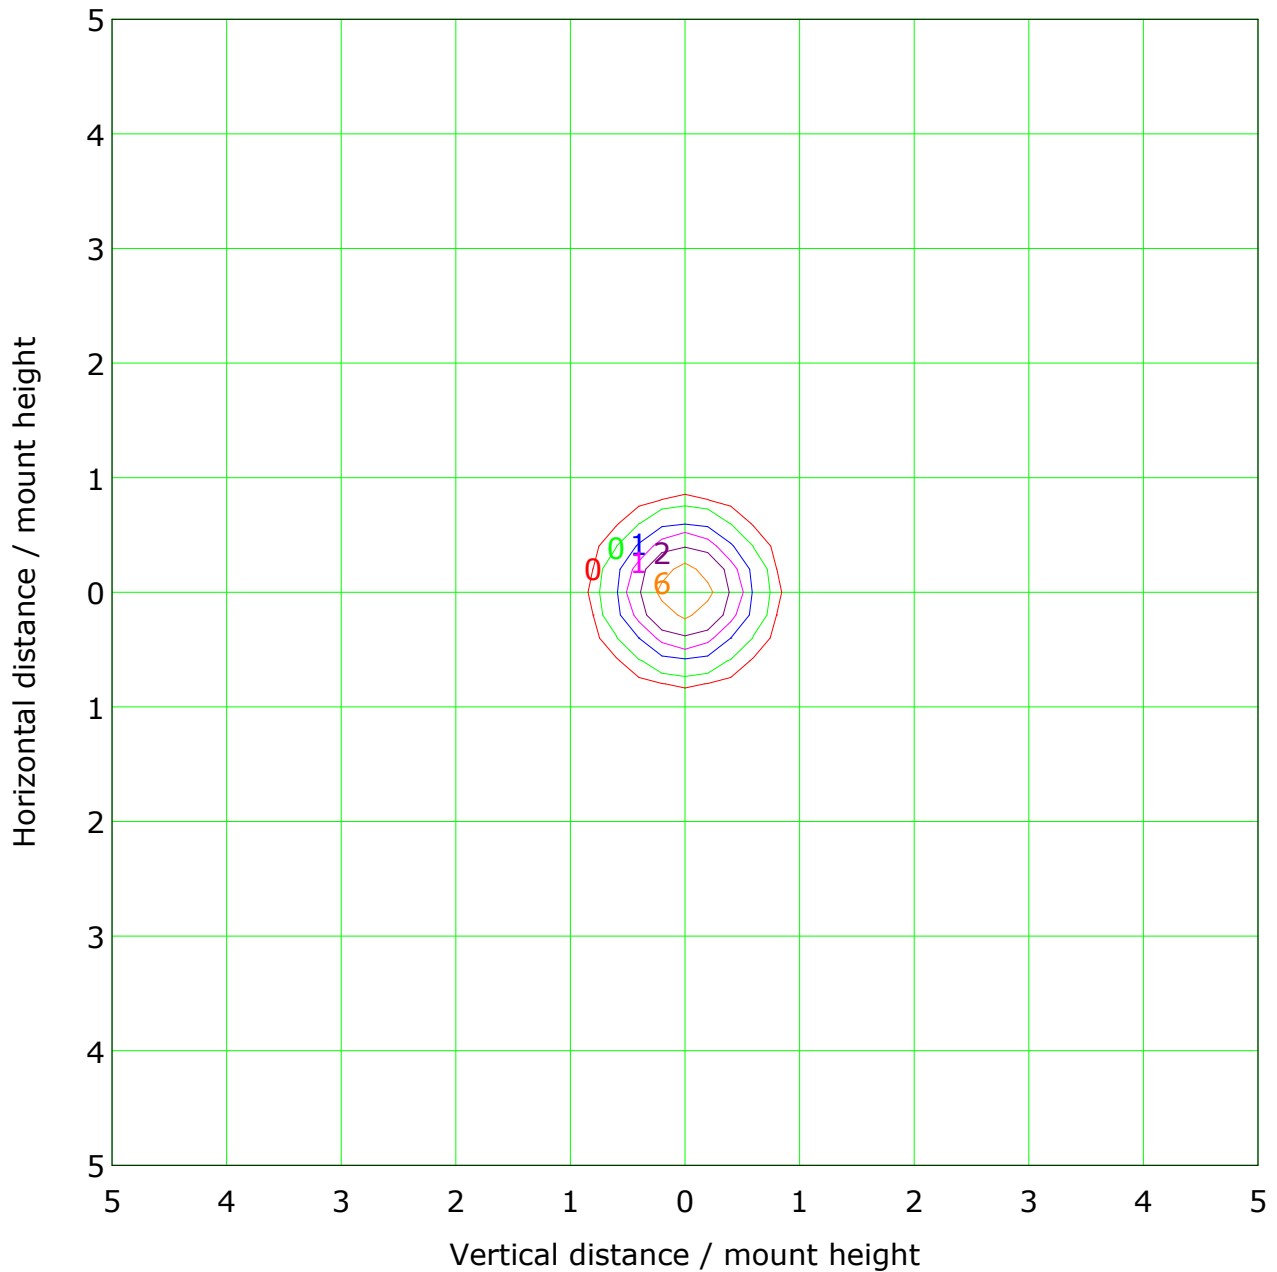


Mounting Height: 10m    Max Lux(100%): 12 lx			
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	1 lx
— ( 20%):	2 lx	— ( 50%):	6 lx
— (100%):	12 lx		


C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Illuminance at a Distance

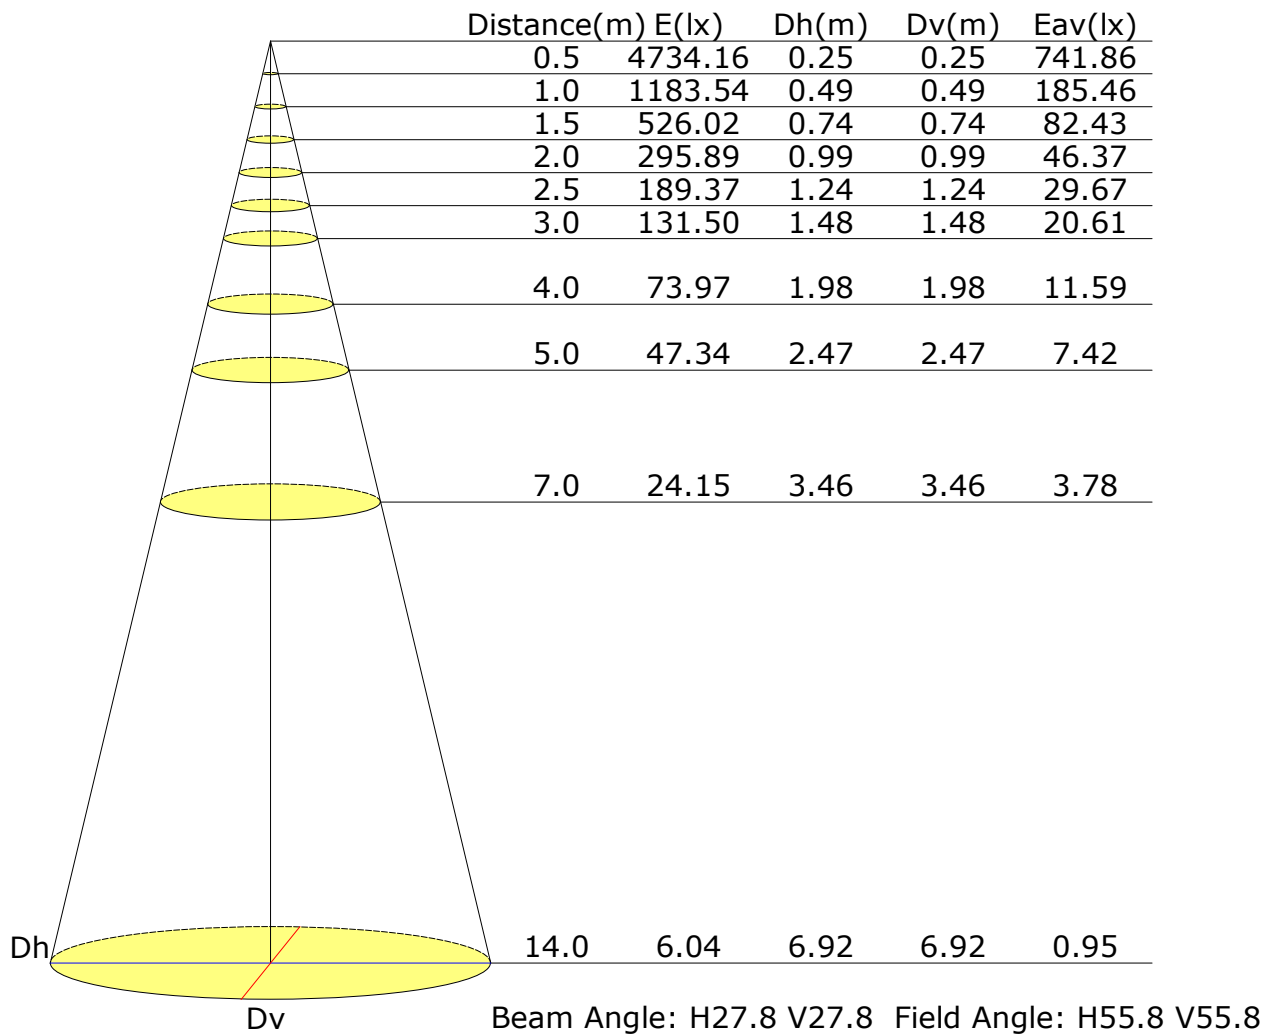

## Vertical IsoLux Plot

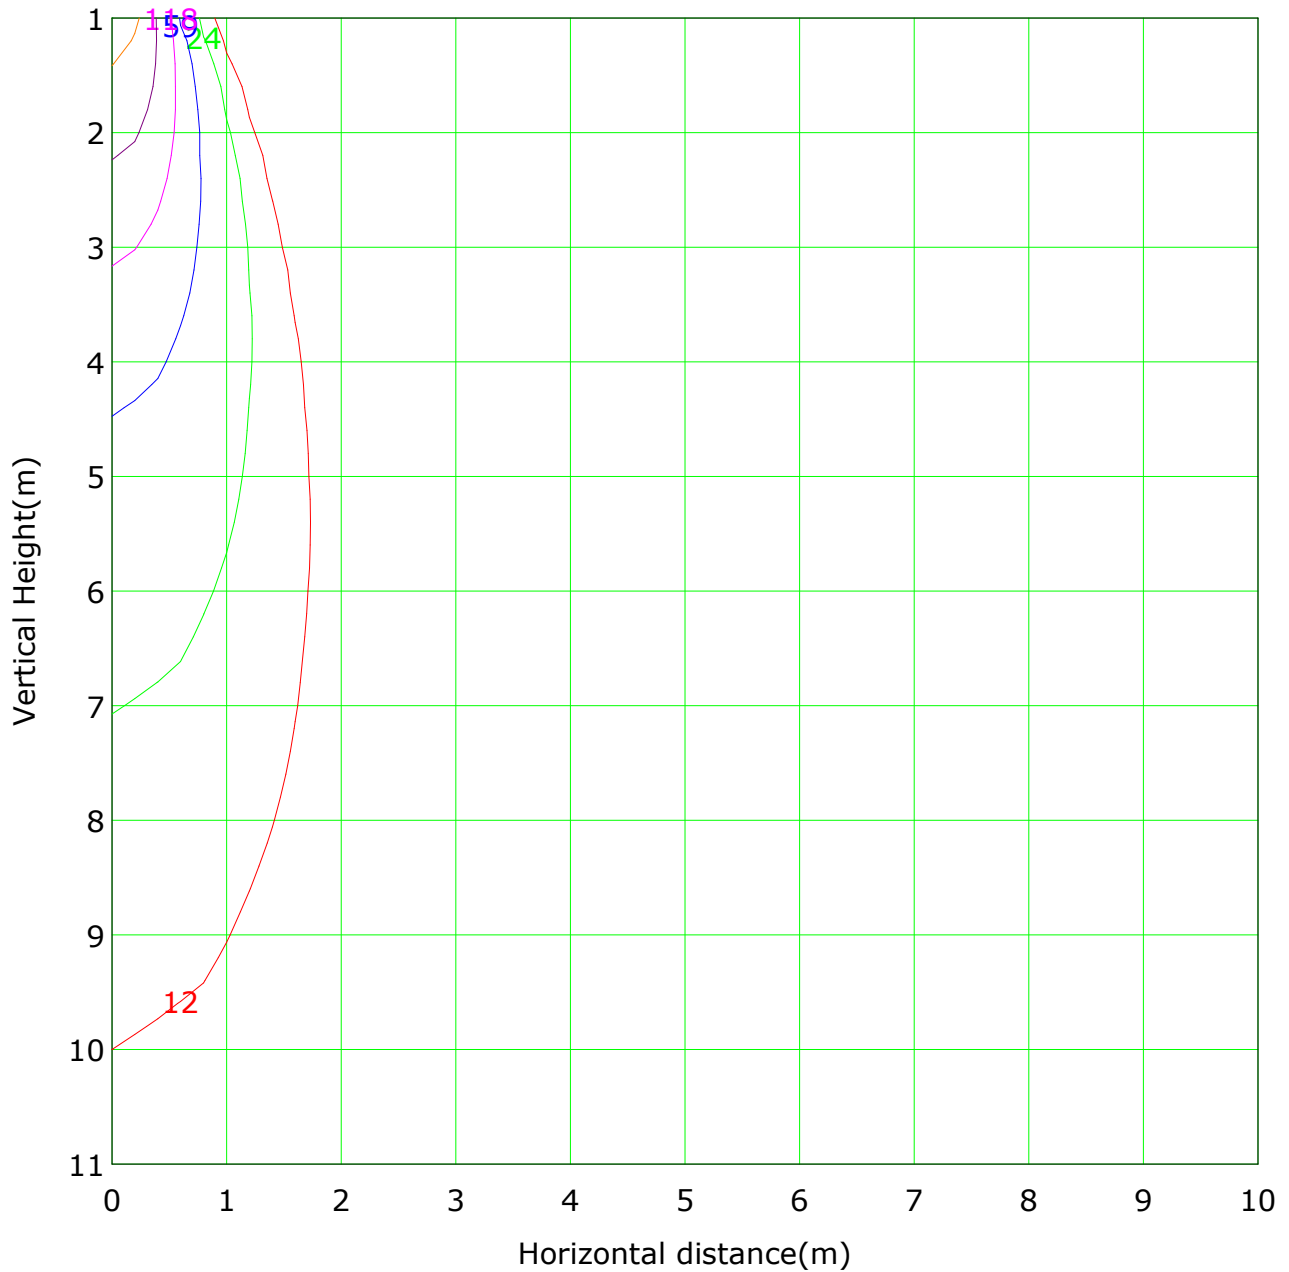


Lowest(m): 1m    Highest(m): 11    Max Lux: 1184	
( 1%): 12 lx	( 2%): 24 lx
( 5%): 59 lx	( 10%): 118 lx
( 20%): 237 lx	( 50%): 592 lx
(100%): 1184 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

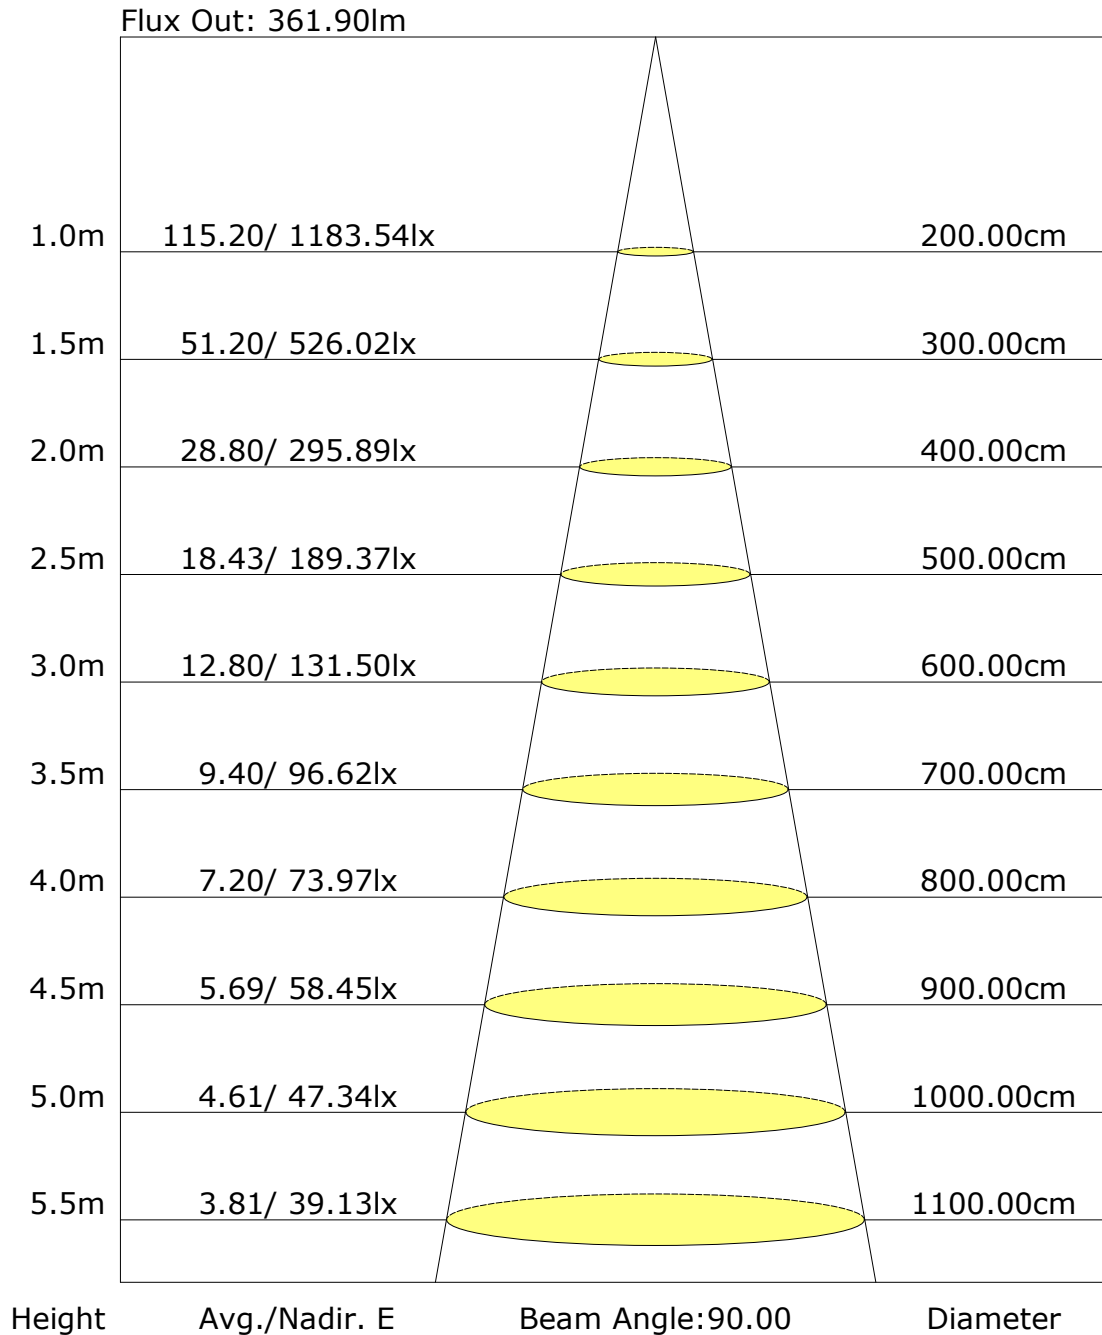

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: