

Report No.: 56.07513 PURE Downlight

Test Time: 2023-06-03 21:26

## Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 15D

Current: 0.040 A

Power Factor: 0.937

Voltage: 219.7 V

Power: 8.20 W

## Photometric Results

CIE Class: Direct

Measurement Flux: 475.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H15.4

Vertical Diffuse Angle(50%): V15.4

Luminaire Efficacy Rating (LER): 58

Max. Intensity: 4343.84 cd

Total Rated Lamp Lumens: 475.8 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 4343.83 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

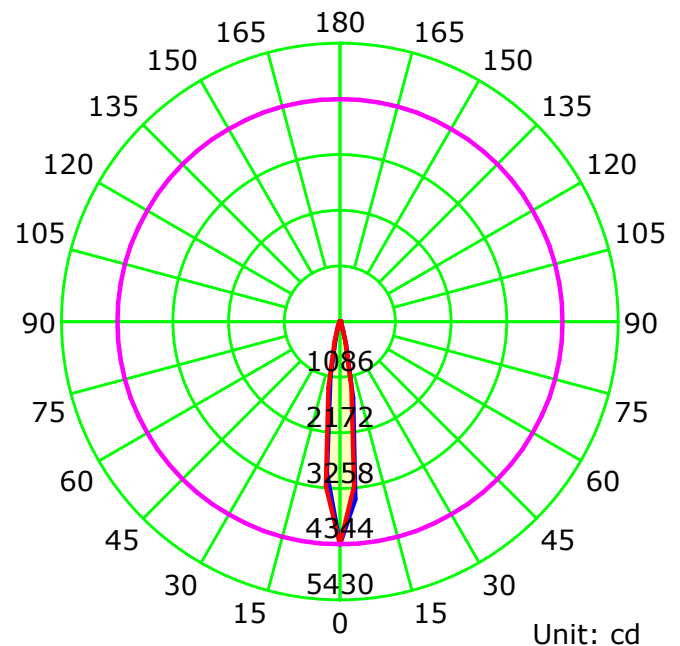

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

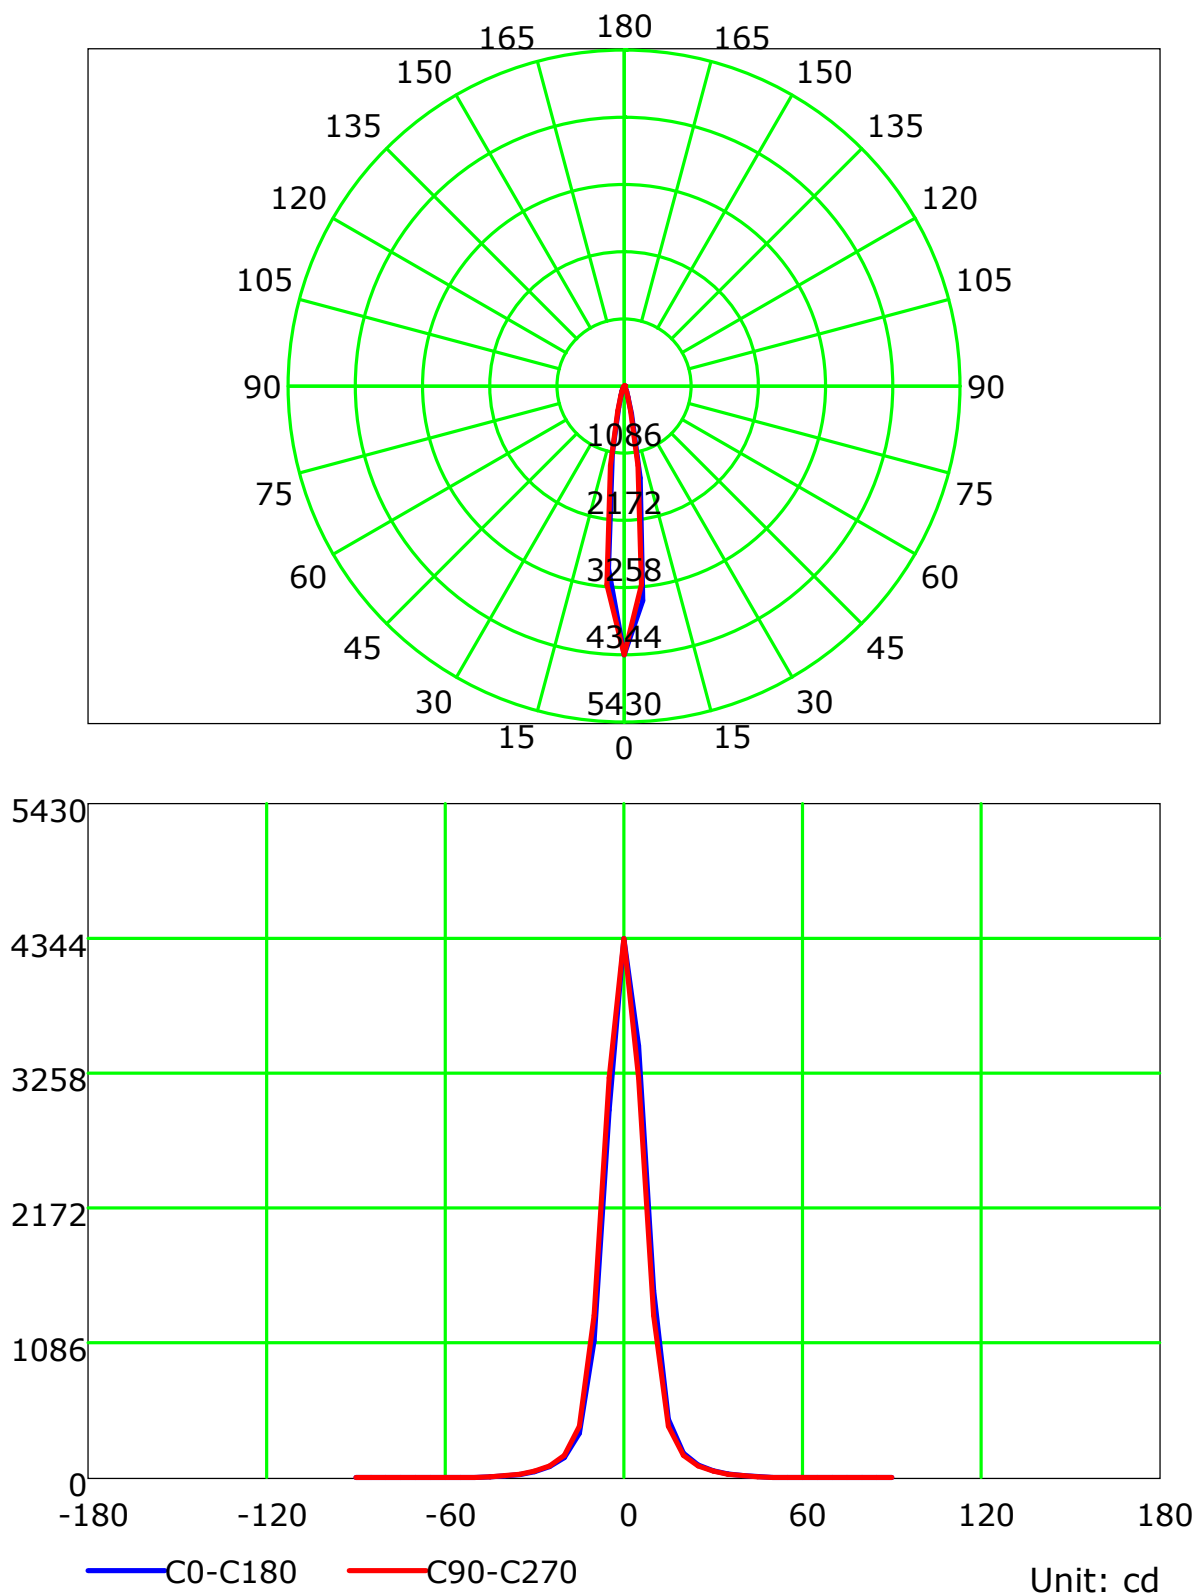

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

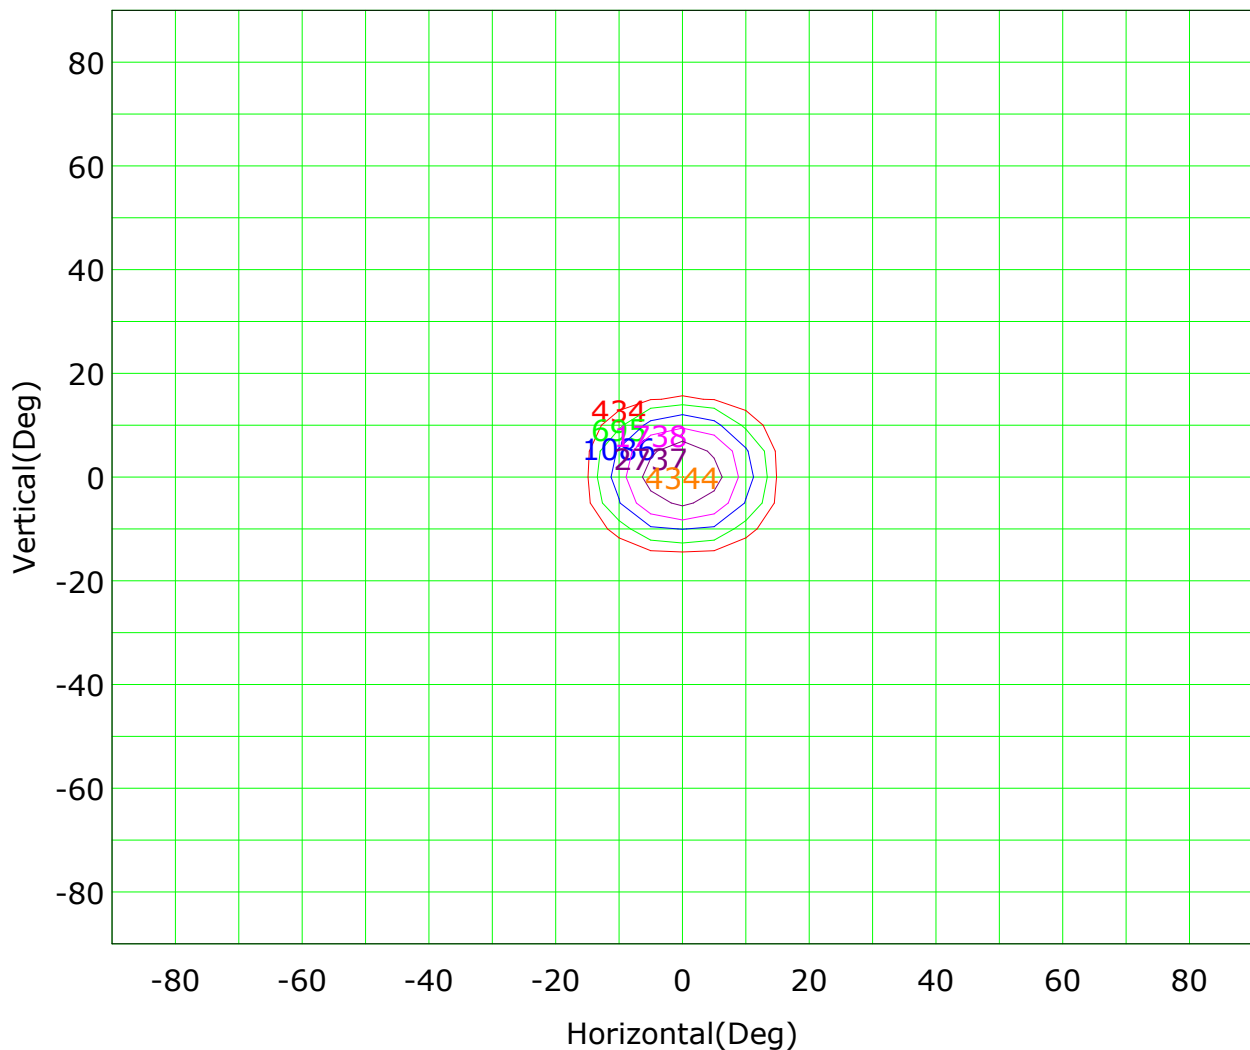

Imax (100%): 4344 cd

( 10%): 434 cd	( 16%): 695 cd
( 25%): 1086 cd	( 40%): 1738 cd
( 63%): 2737 cd	(100%): 4344 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

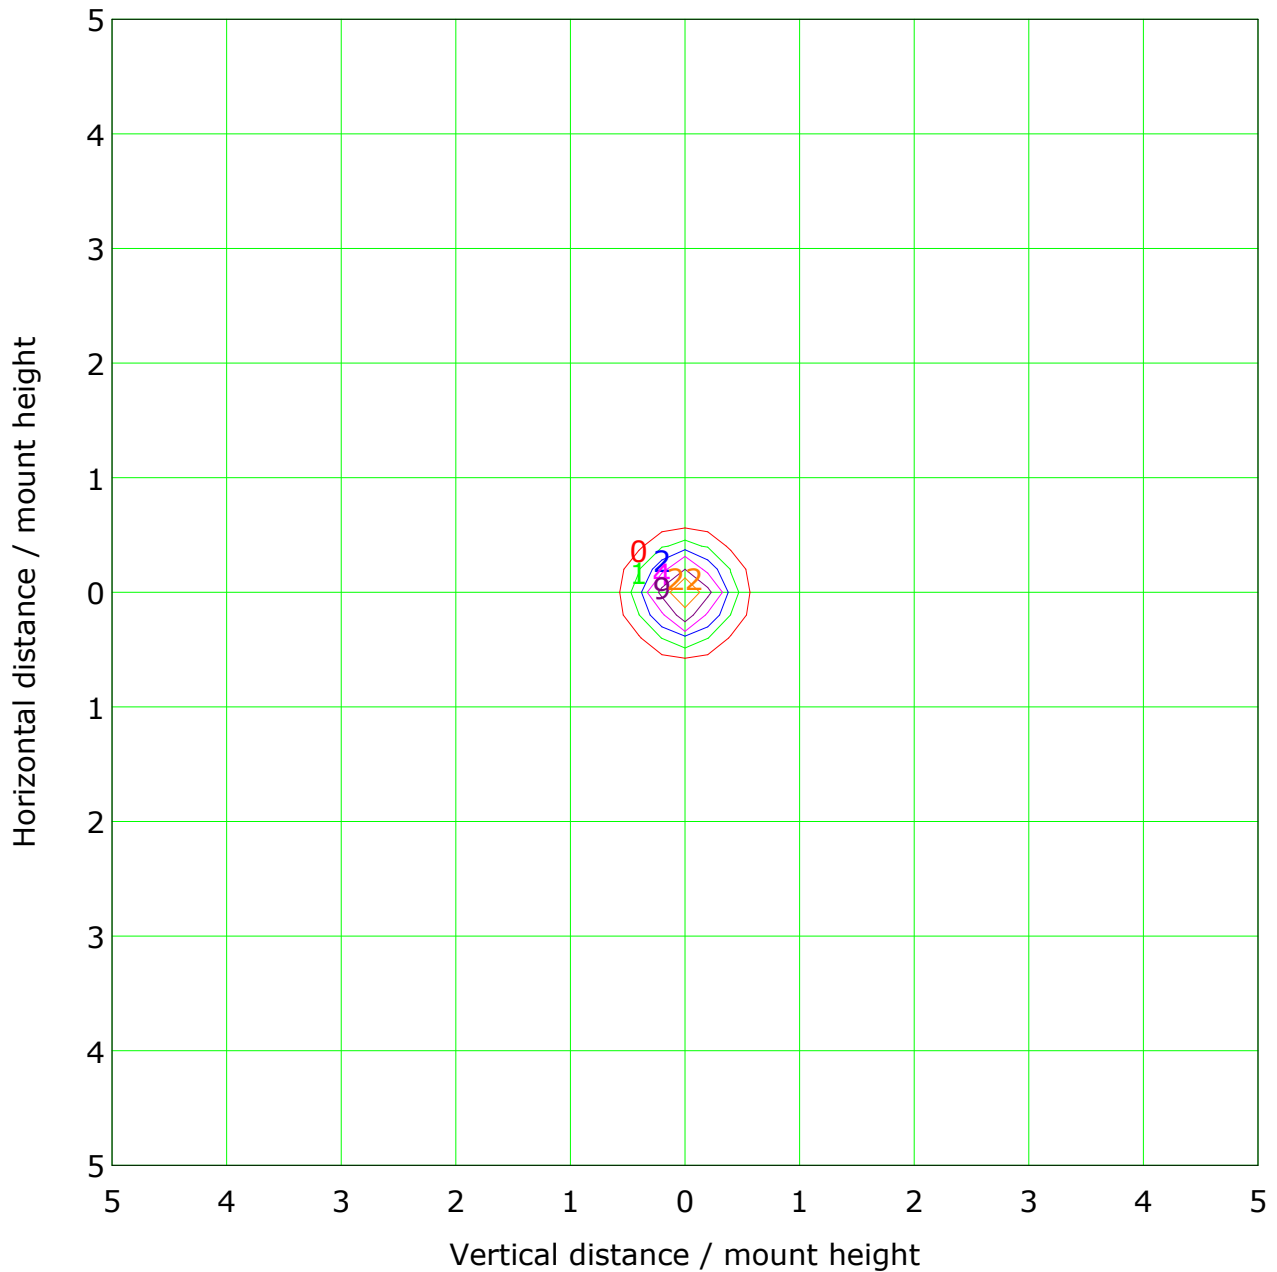

Mounting Height: 10m		Max Lux(100%): 43 lx	
( 1%):	0 lx	( 2%):	1 lx
( 5%):	2 lx	( 10%):	4 lx
( 20%):	9 lx	( 50%):	22 lx
(100%):	43 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

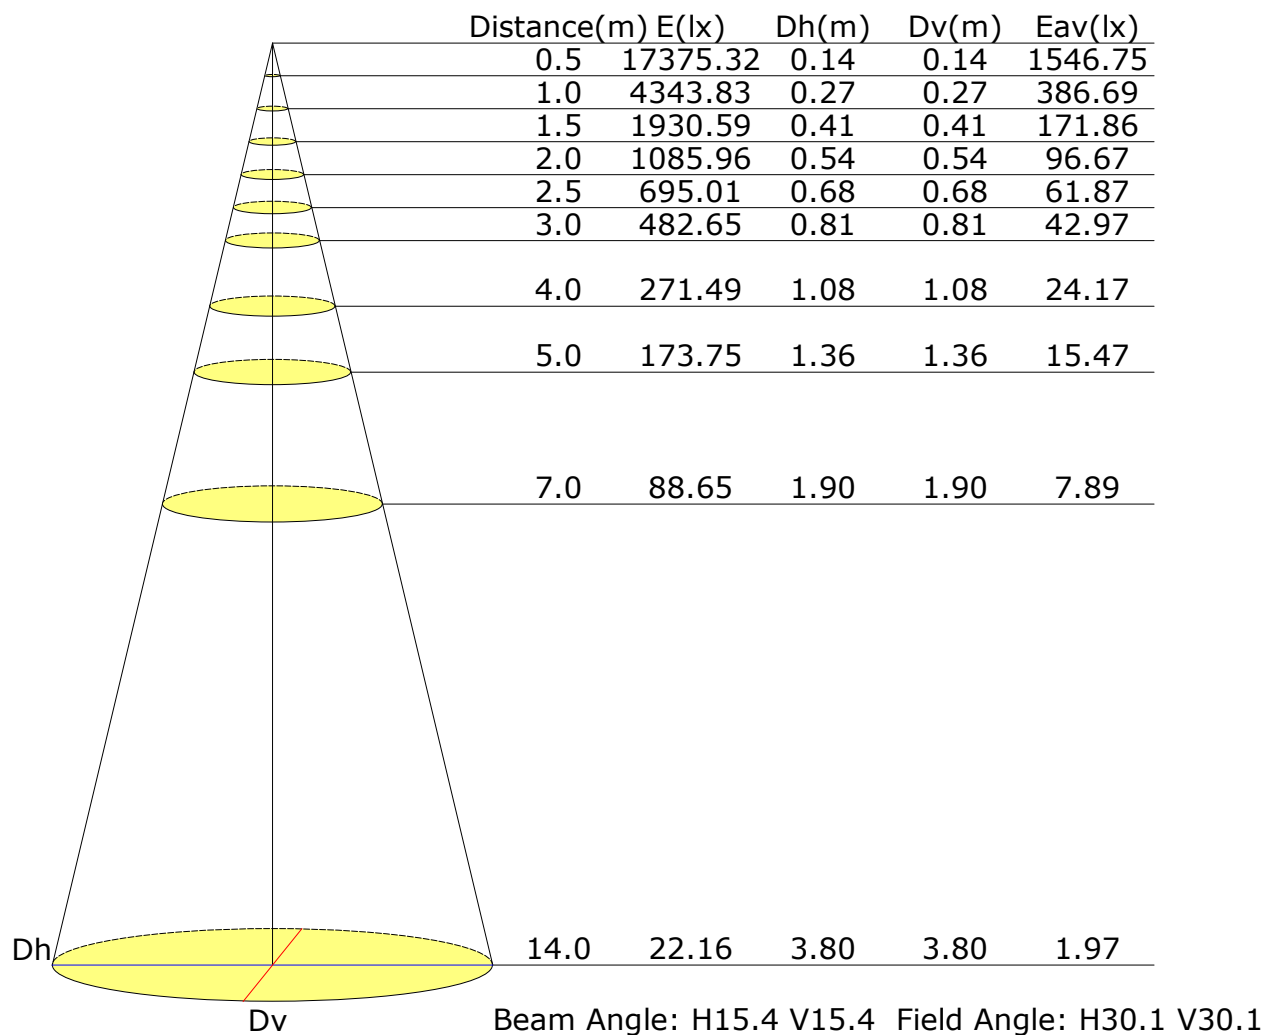

## Vertical IsoLux Plot

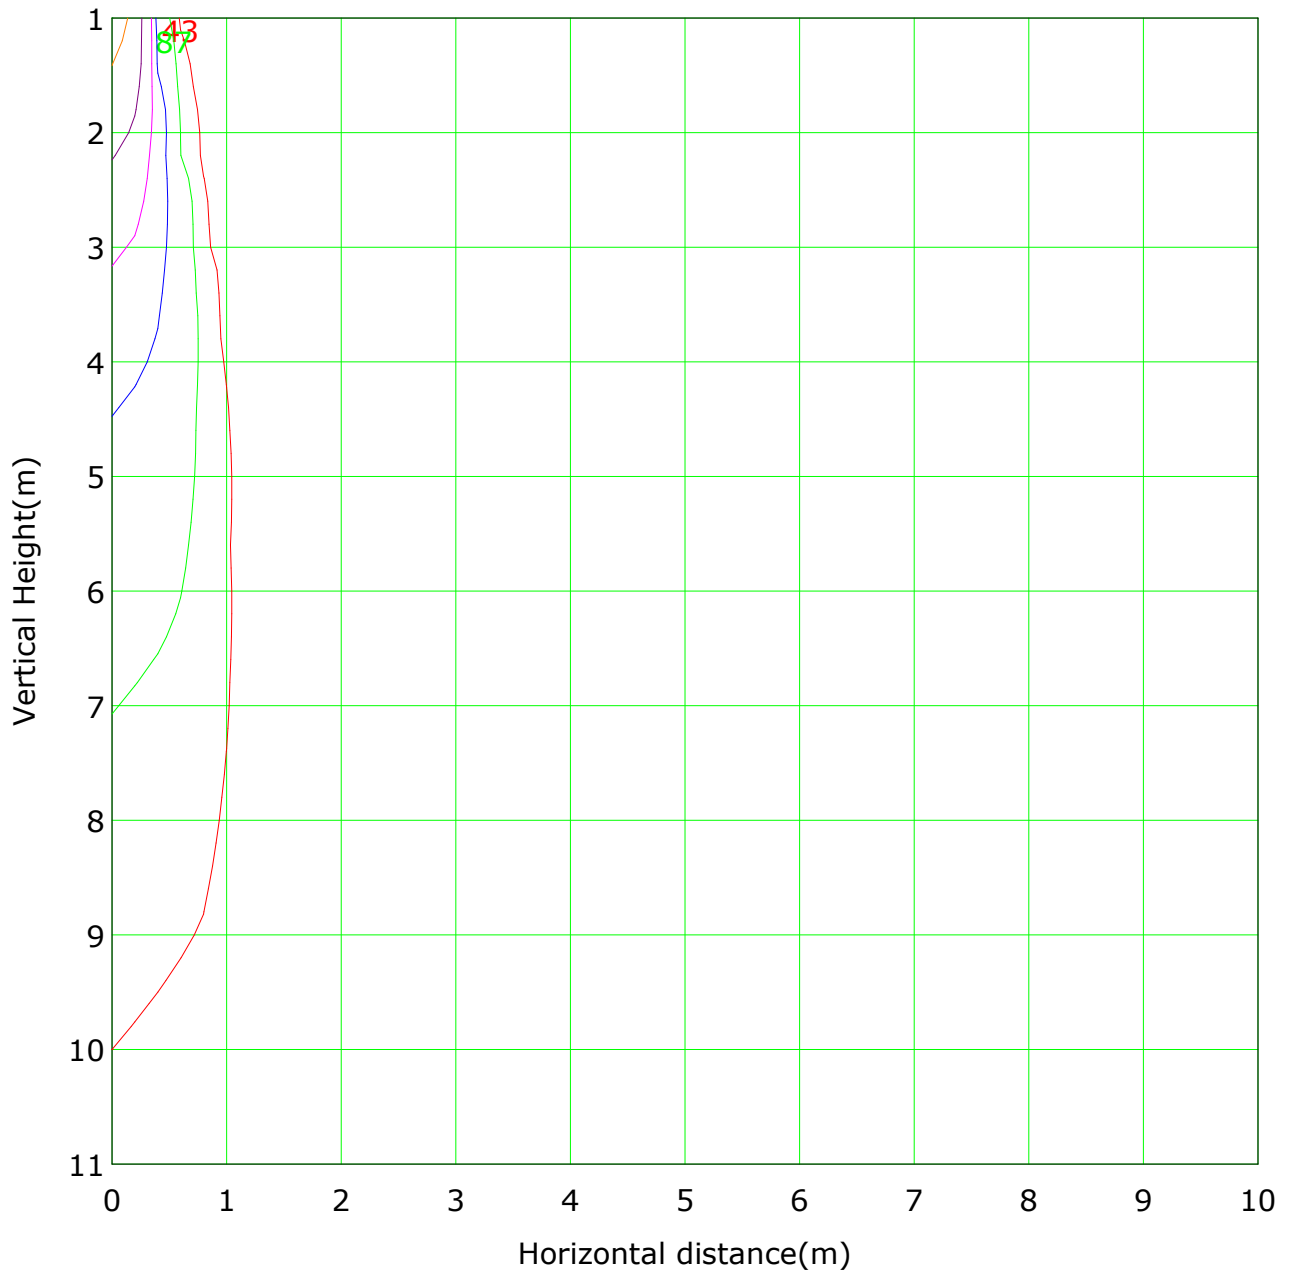


Lowest(m): 1m    Highest(m): 11    Max Lux: 4344

( 1%): 43 lx	( 2%): 87 lx
( 5%): 217 lx	( 10%): 434 lx
( 20%): 869 lx	( 50%): 2172 lx
(100%): 4344 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

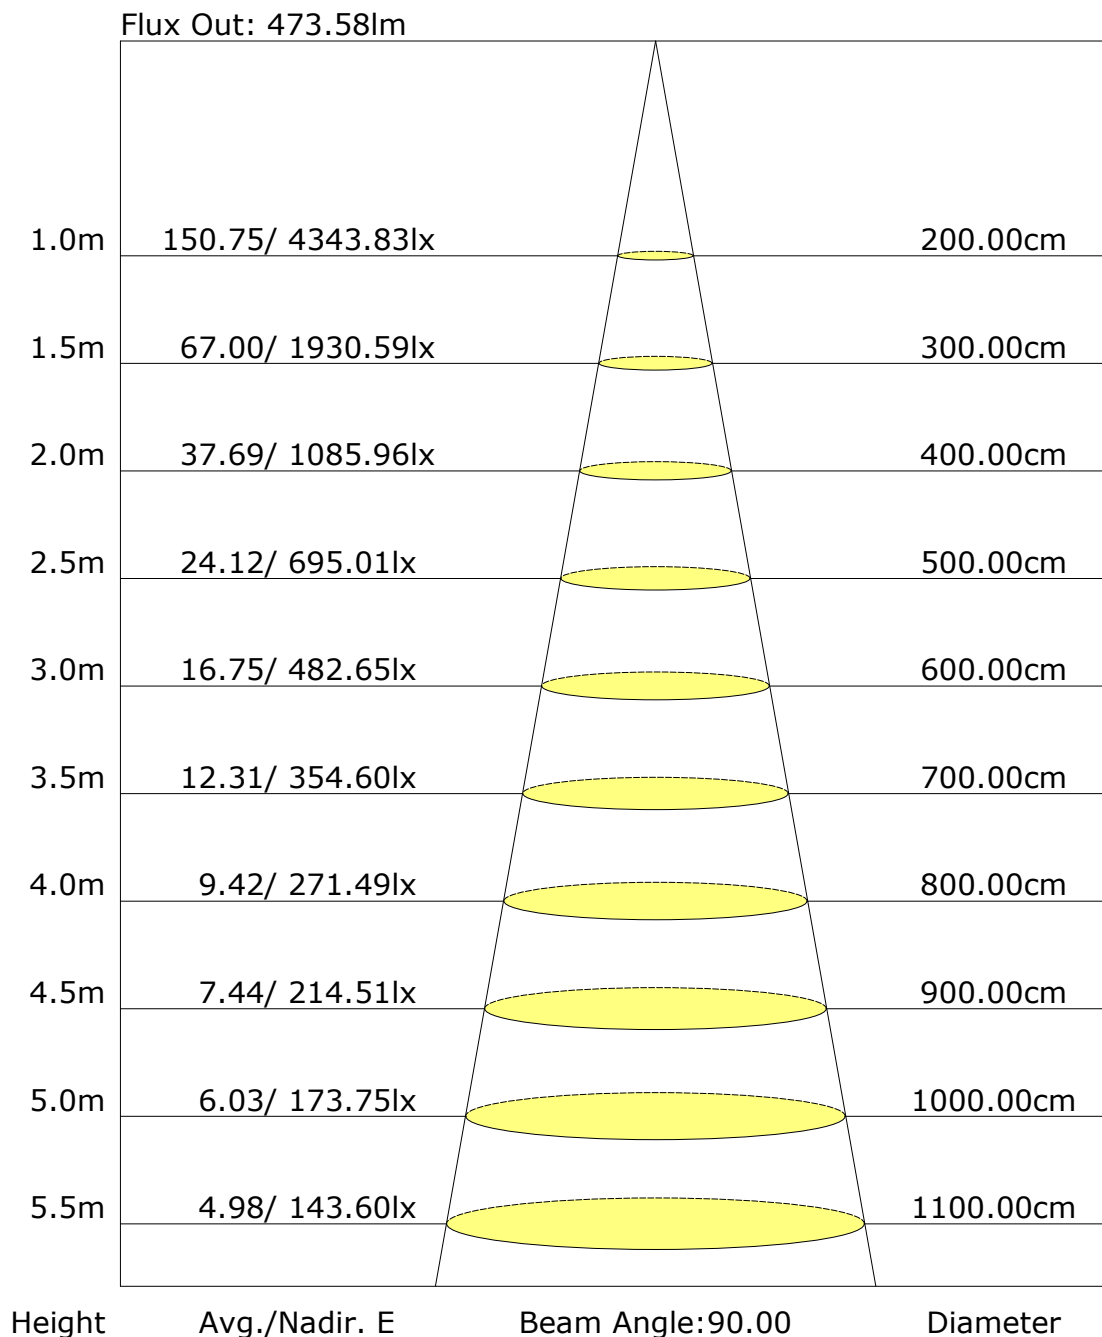

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: