


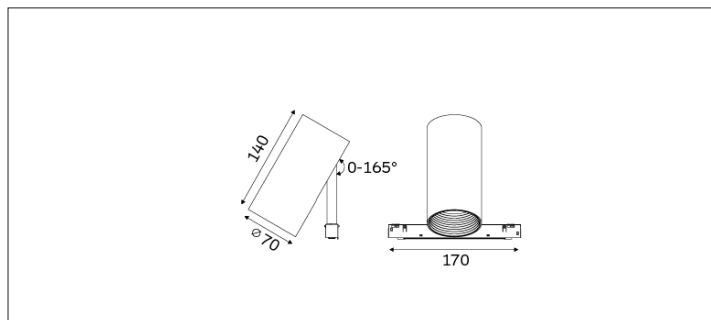


62.07013 OPAL Track Lighting



Connected Load	25W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	24D/34D/43D/53D
Track	Low Voltage Track
Light Distribution	OPAL Track Lighting
Luminous Flux Of The Luminaire	1661lm
Luminaire Efficacy	61lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		24°
1.0	8027	0.42
2.0	2006	0.84
3.0	891	1.26
4.0	501	1.68
5.0	321	2.10

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.