

Report No.: 52.07519 PURE Downlight

Test Time: 2023-06-03 21:20

Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 33D

Current: 0.049 A

Power Factor: 0.956

Voltage: 219.8 V

Power: 10.30 W

Photometric Results

CIE Class: Direct

Measurement Flux: 512.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H33.5

Vertical Diffuse Angle(50%): V33.5

Luminaire Efficacy Rating (LER): 50

Max. Intensity: 1220.28 cd

Total Rated Lamp Lumens: 512.3 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1220.27 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

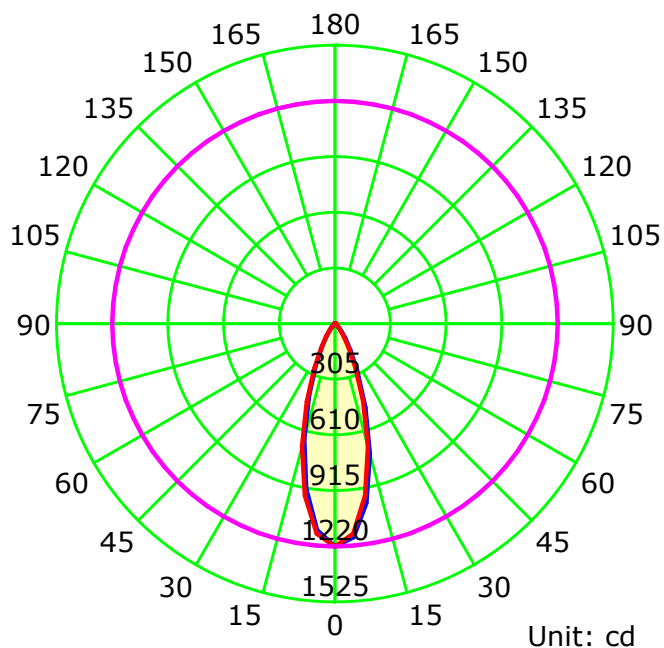

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

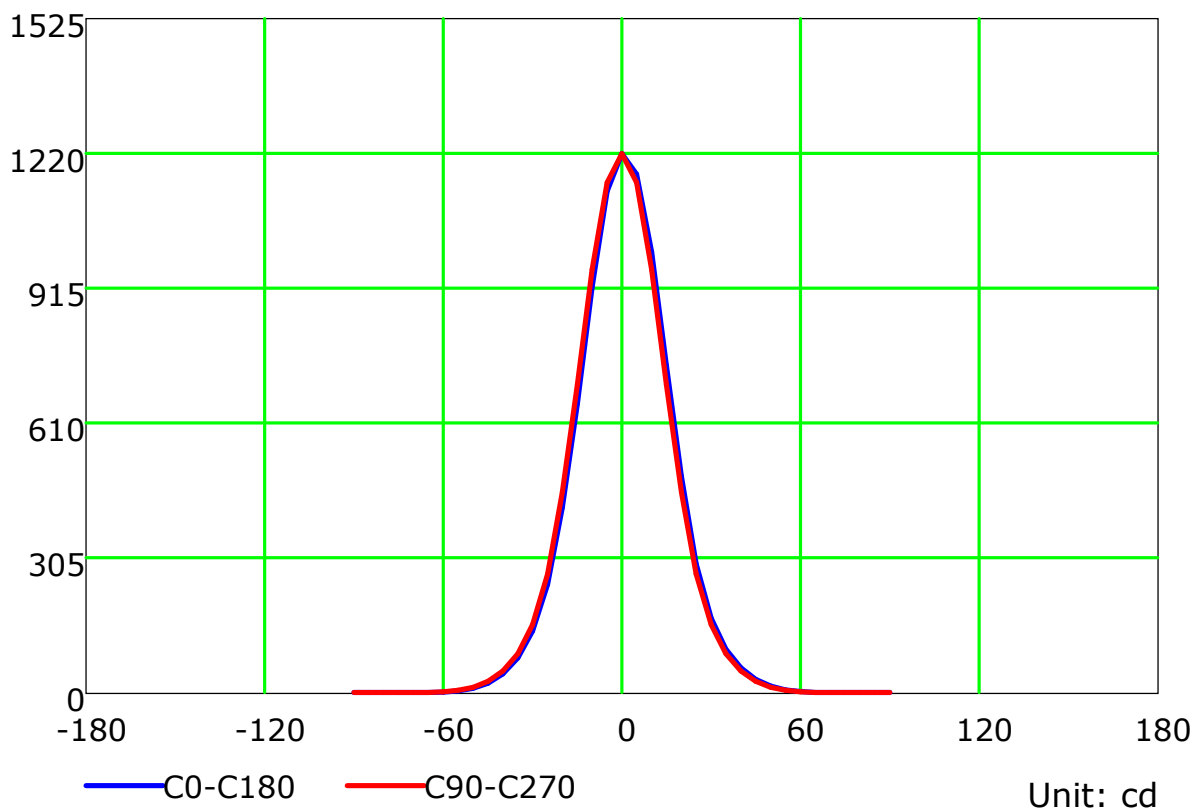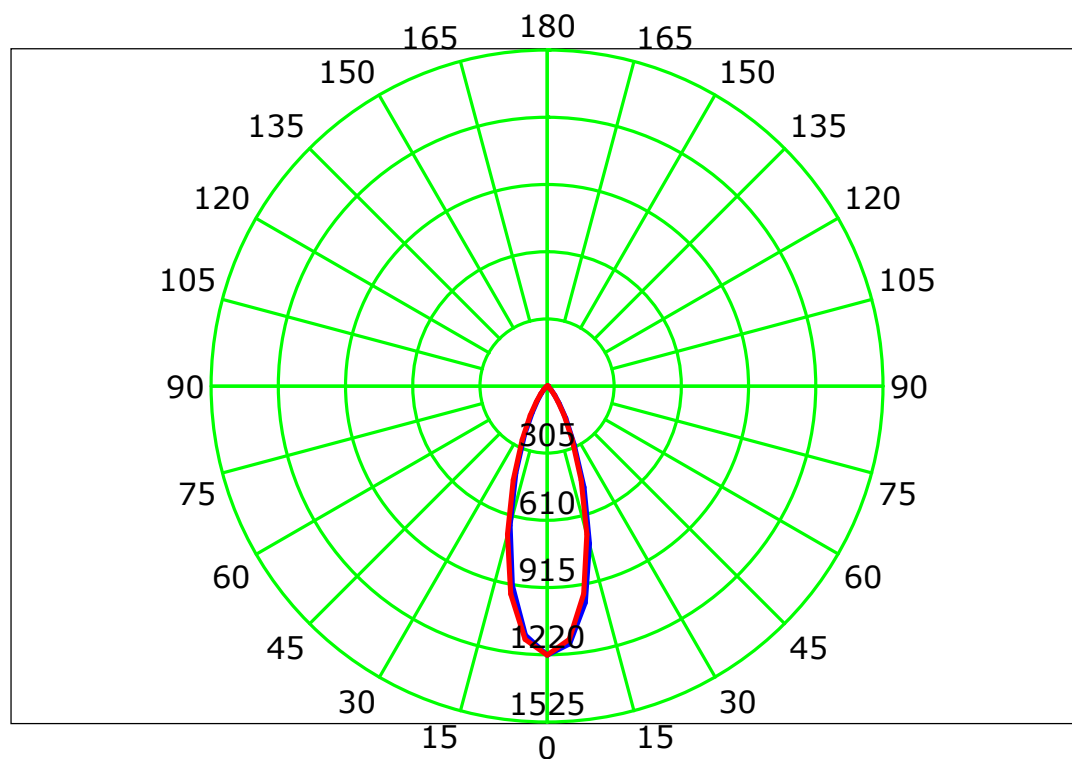

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

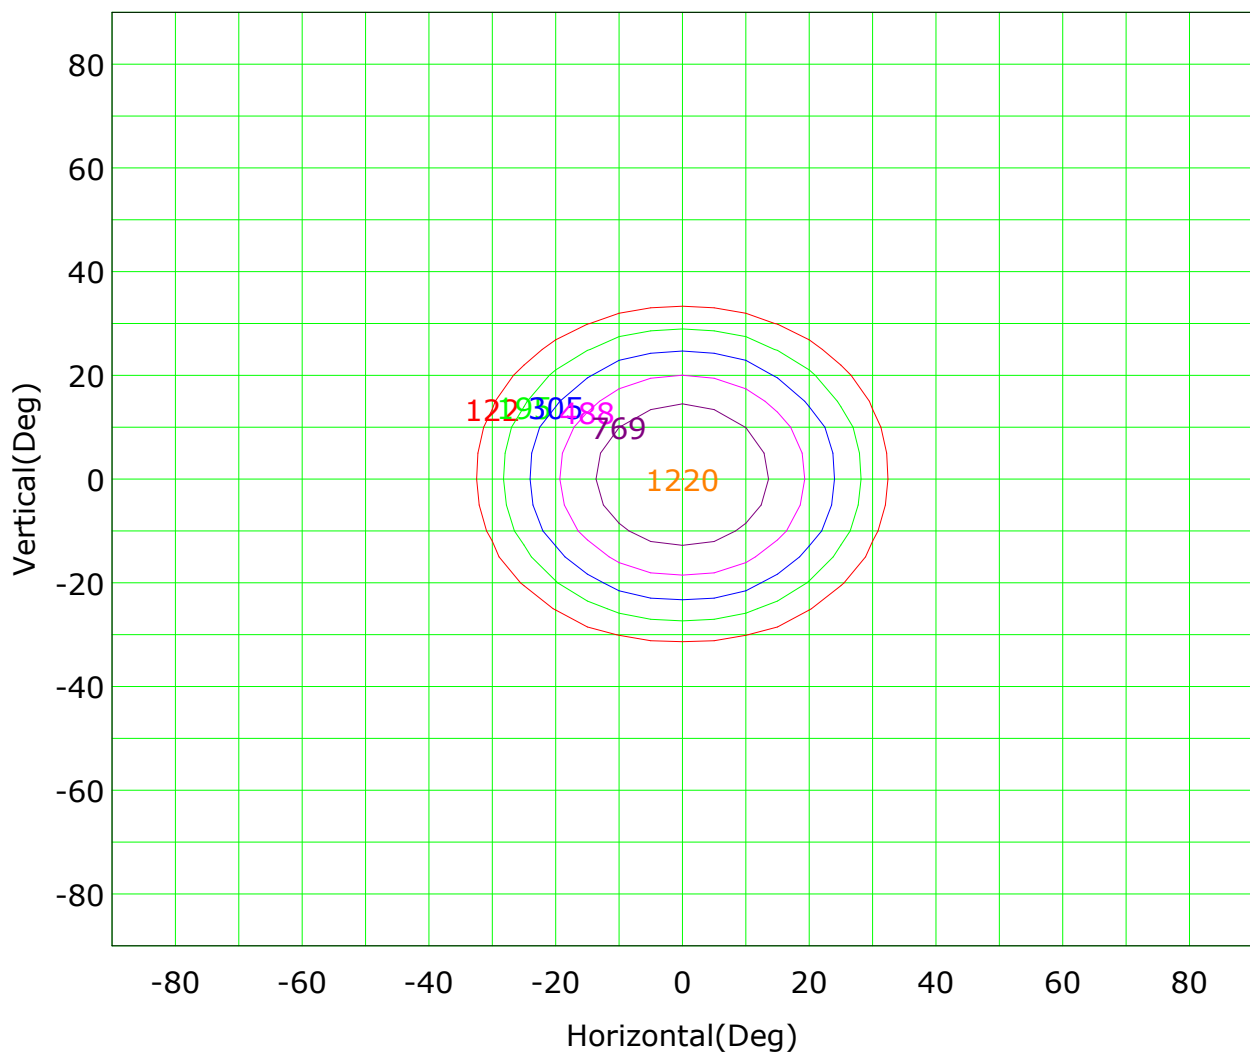

Imax (100%): 1220 cd

(10%): 122 cd	(16%): 195 cd
(25%): 305 cd	(40%): 488 cd
(63%): 769 cd	(100%): 1220 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

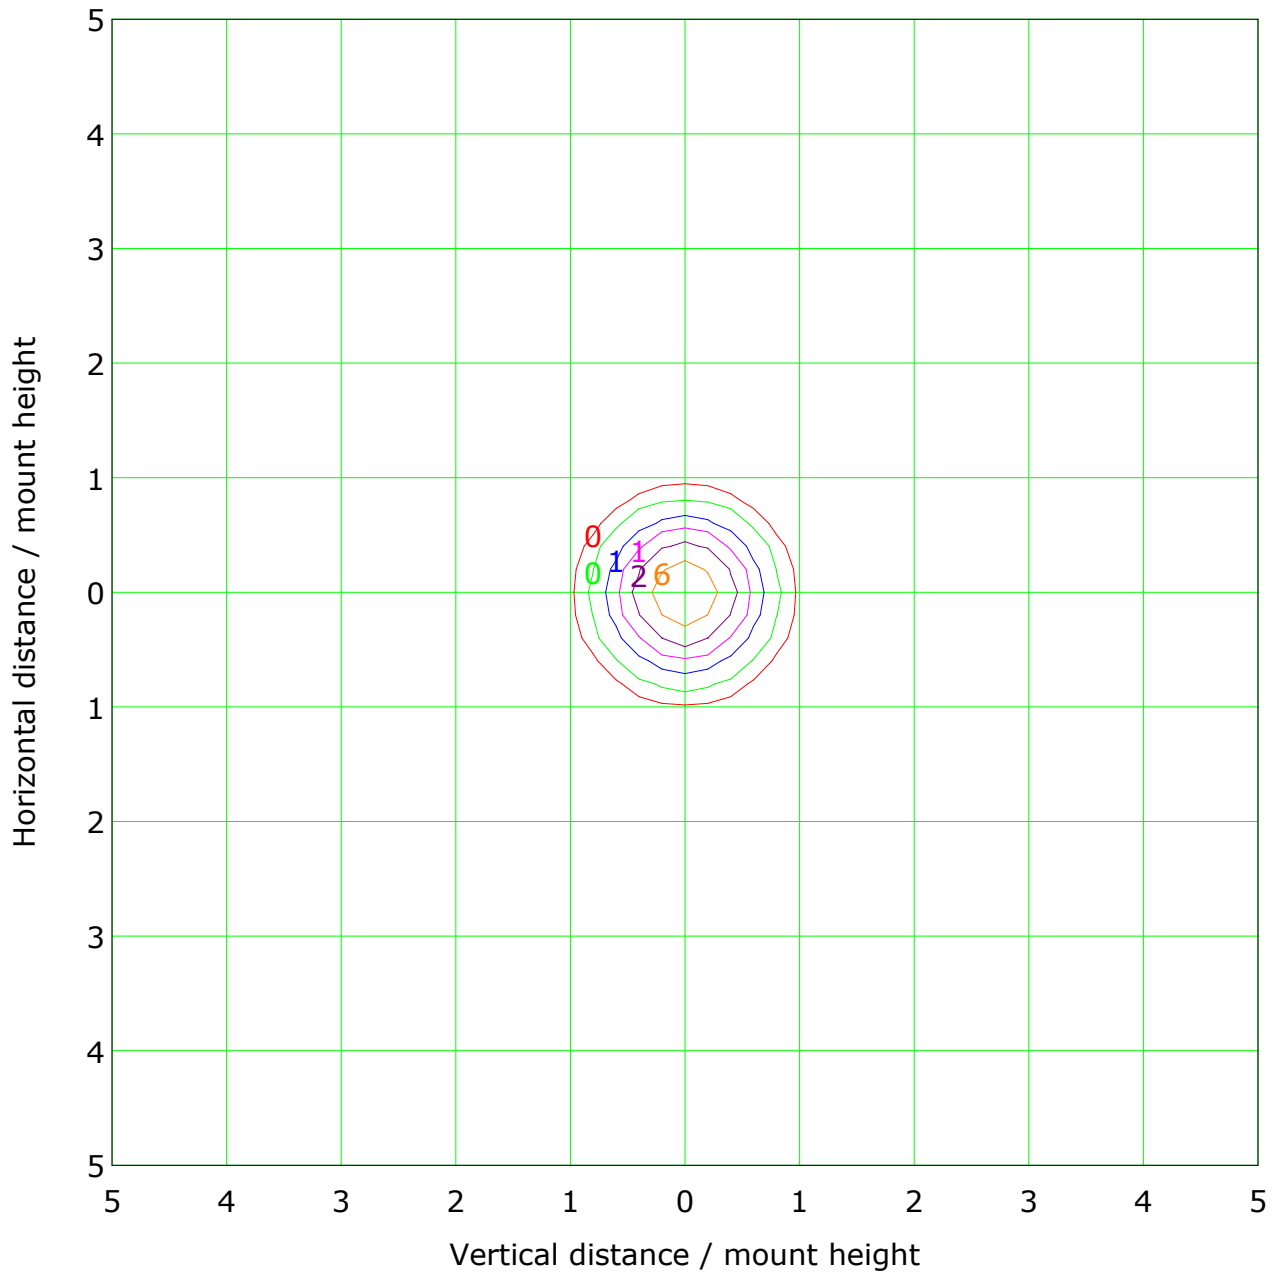


Mounting Height: 10m Max Lux(100%): 12 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	1 lx	— (10%):	1 lx
— (20%):	2 lx	— (50%):	6 lx
— (100%):	12 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

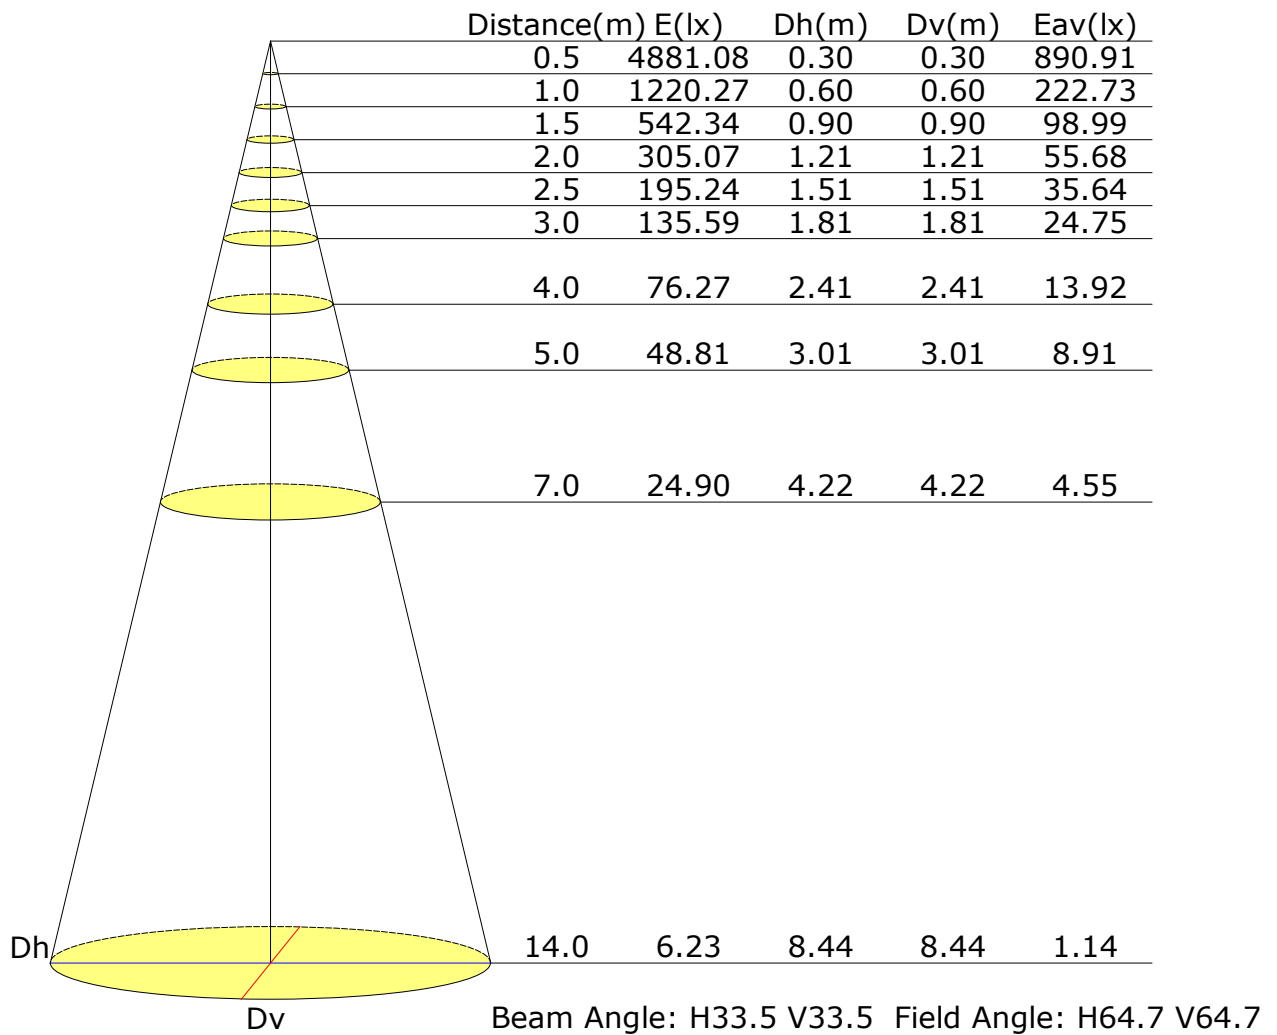

Vertical IsoLux Plot

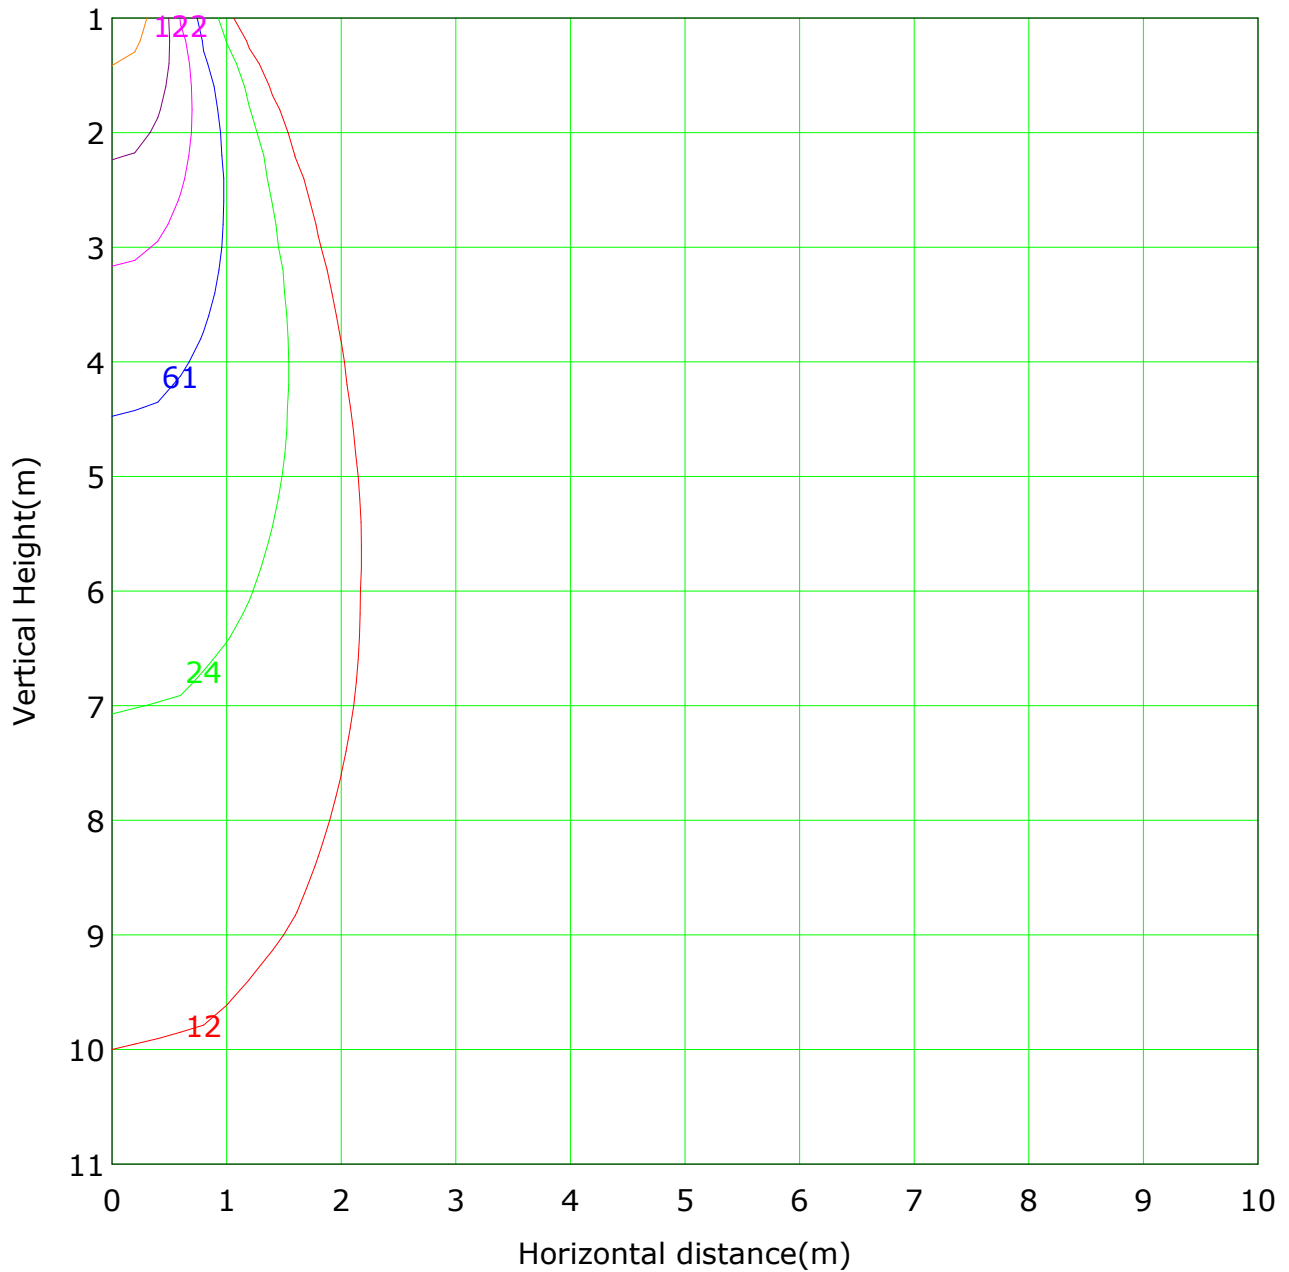


Lowest(m): 1m Highest(m): 11 Max Lux: 1220

(1%): 12 lx	(2%): 24 lx
(5%): 61 lx	(10%): 122 lx
(20%): 244 lx	(50%): 610 lx
(100%): 1220 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

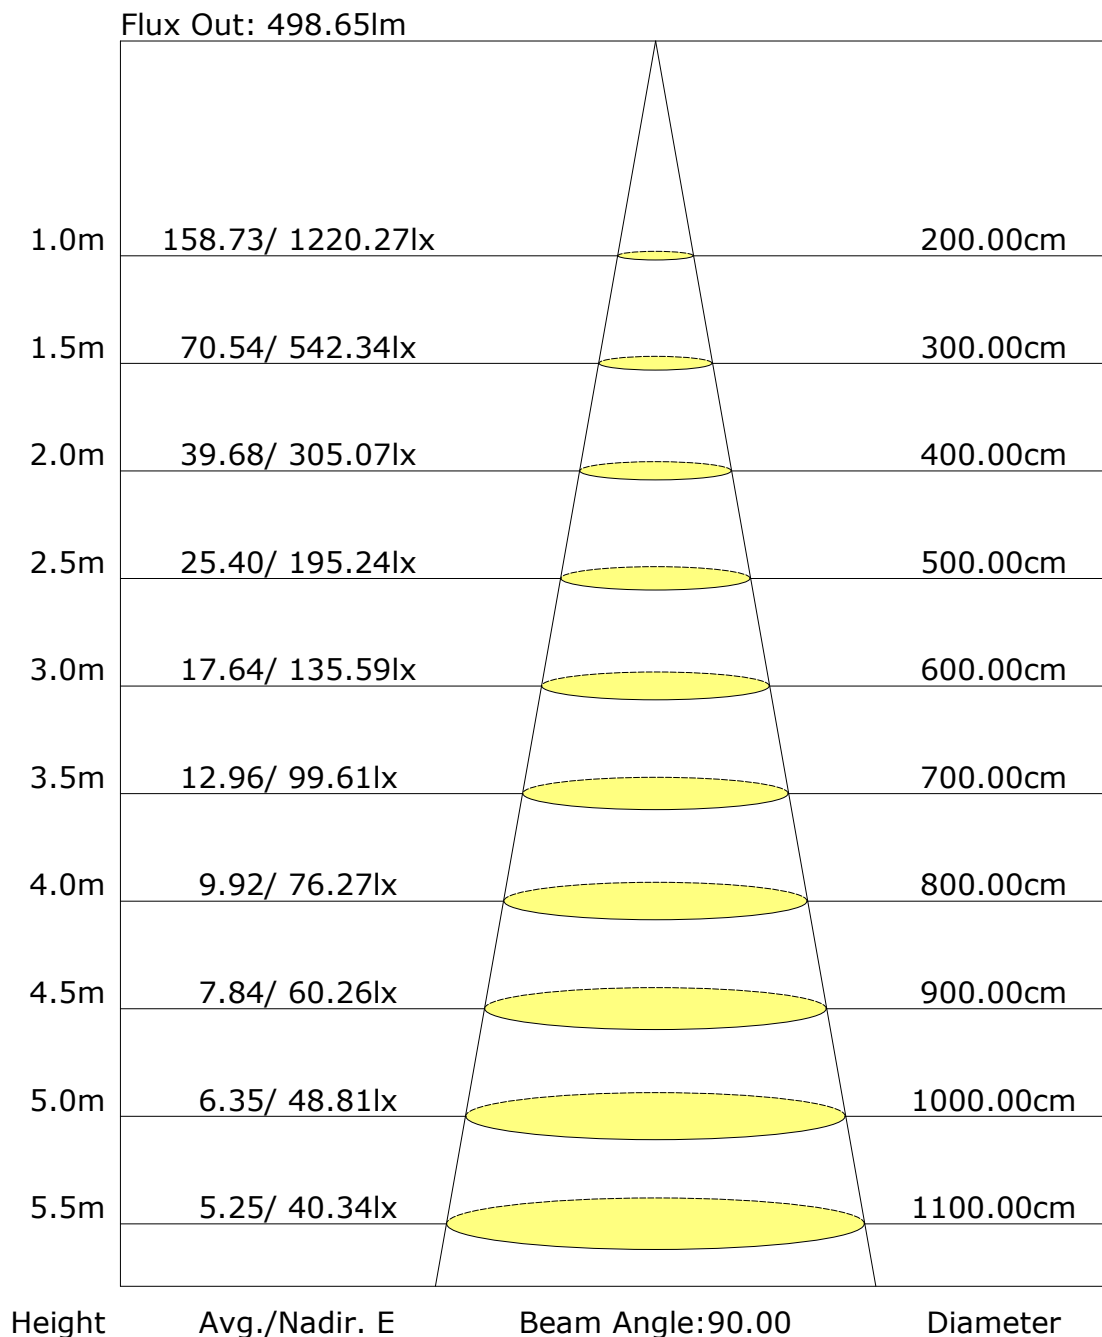

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: