



52.05519 PURE Recessed Downlight



IP20

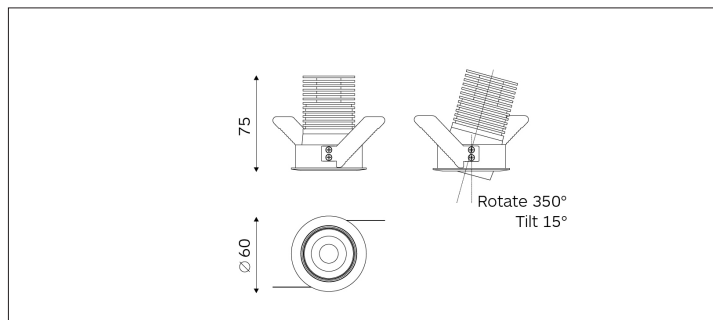

Light Distribution	PURE Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	18D/28D/37D/48D
Cut Out	55mm
Connected Load	9W
Luminous Flux Of The Luminaire	368lm
Luminaire Efficacy	43lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
		28°
1.0	1183	0.49
2.0	295	0.99
3.0	131	1.48
4.0	73	1.98
5.0	47	2.47

Application areas: High end residential and retail projects, hotels, museums and galleries.