



56.03517 PURE Recessed Downlight



IP20

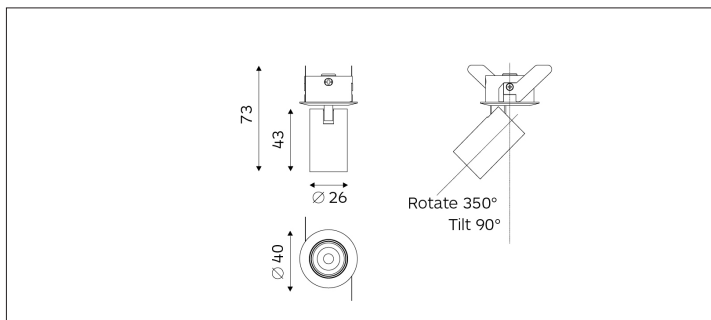

Light Distribution	PURE Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	28D/34D/41D/51D
Cut Out	35mm
Connected Load	4.5W
Luminous Flux Of The Luminaire	190lm
Luminaire Efficacy	43lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		28°
1.0	604	0.51
2.0	151	1.01
3.0	67	1.52
4.0	37	2.03
5.0	24	2.53

Application areas: High end residential and retail projects, hotels, museums and galleries.