

Report No.: 51.05512 PURE Downlight

Test Time: 2023-06-03 11:05

## Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 28D

Current: 0.054 A

Power Factor: 0.969

Voltage: 210.8 V

Power: 11.10 W

## Photometric Results

CIE Class: Direct

Measurement Flux: 453.4 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H27.7

Vertical Diffuse Angle(50%): V27.7

Luminaire Efficacy Rating (LER): 41

Max. Intensity: 1454.52 cd

Total Rated Lamp Lumens: 453.4 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1454.51 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

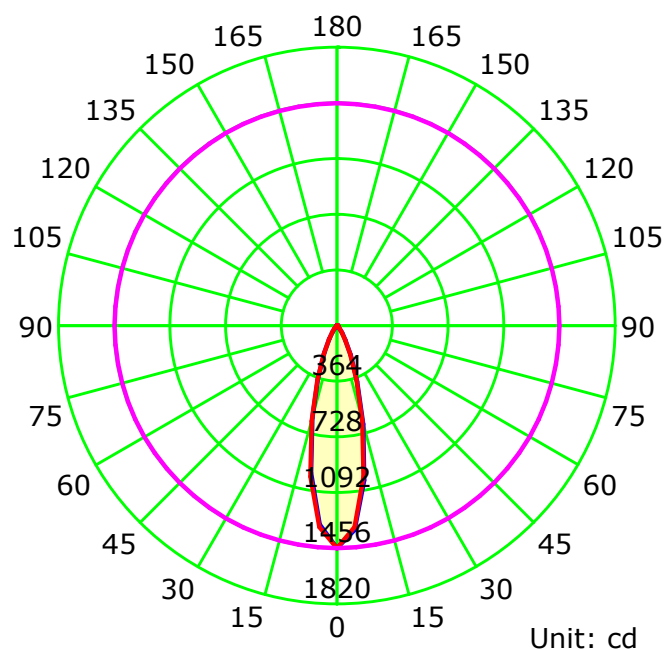

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

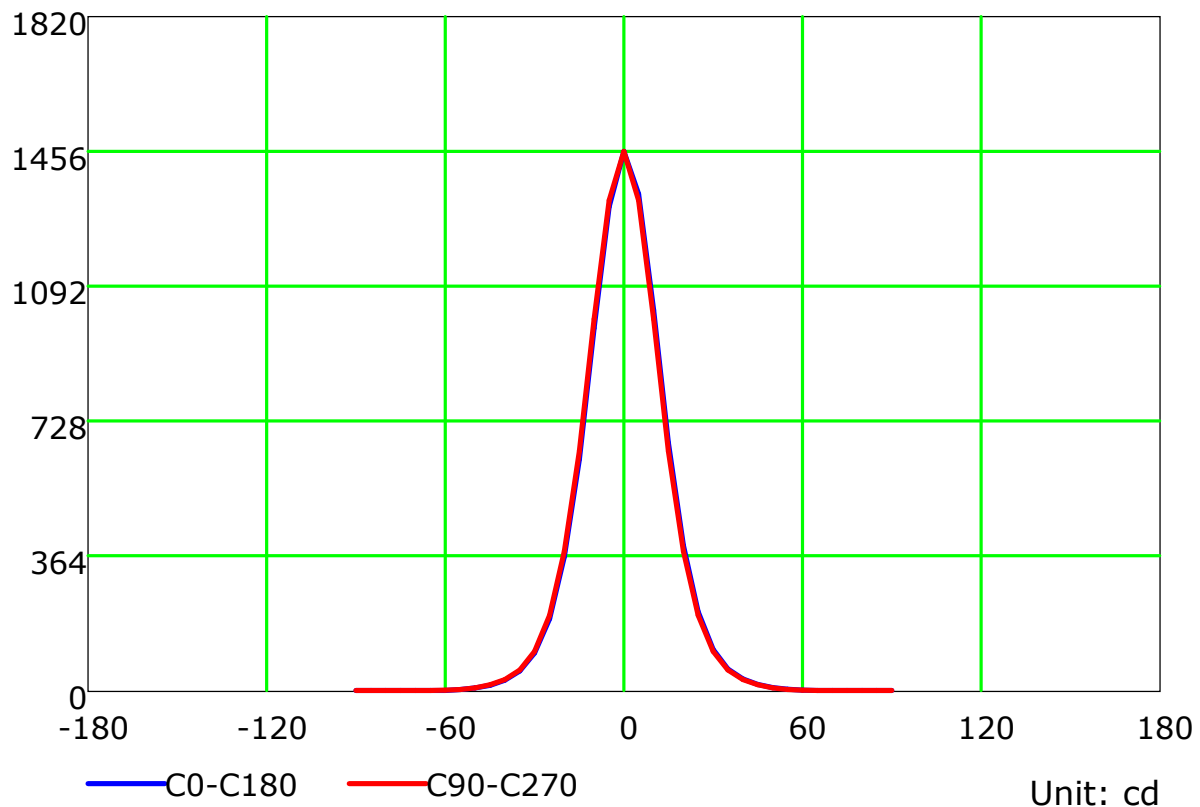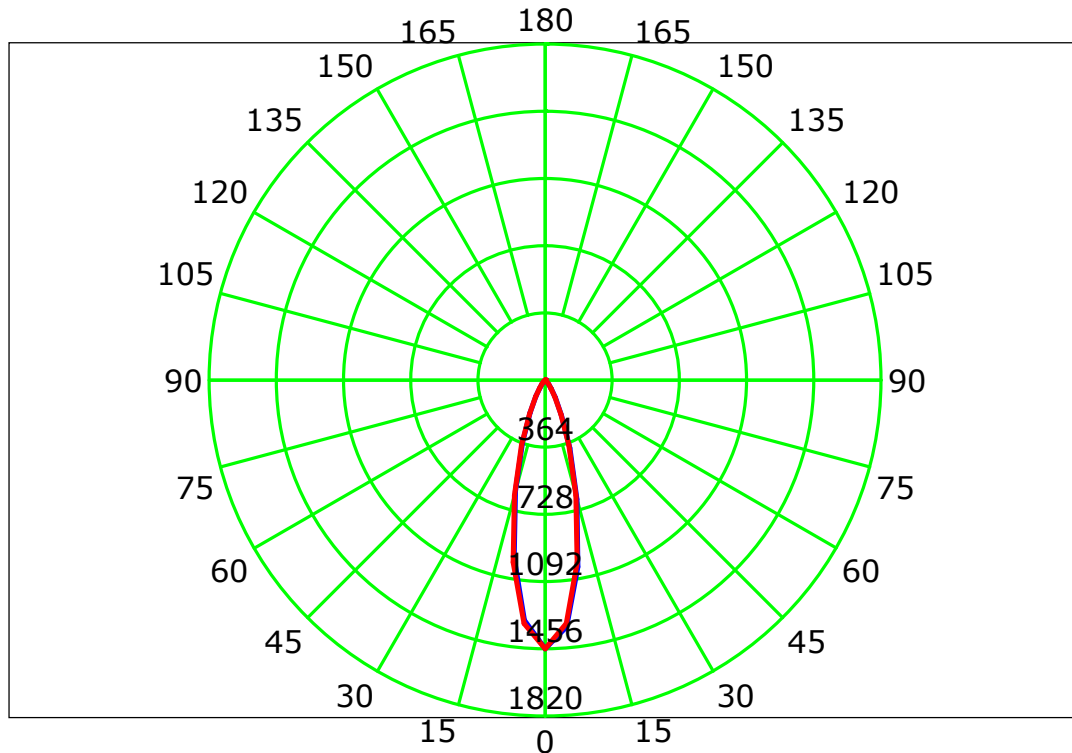

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

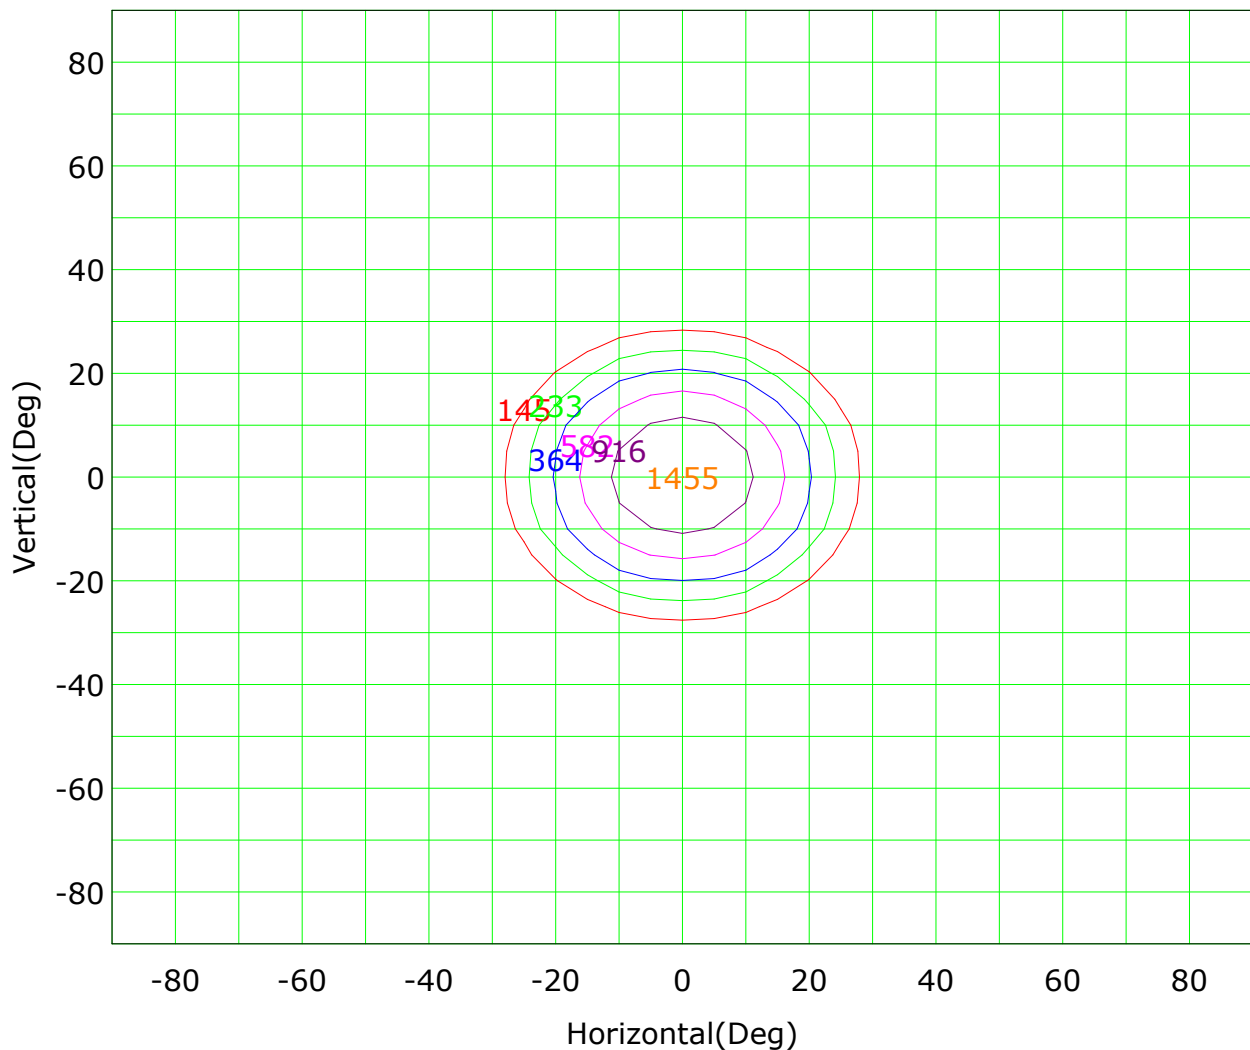

Imax (100%): 1455 cd

( 10%): 145 cd	( 16%): 233 cd
( 25%): 364 cd	( 40%): 582 cd
( 63%): 916 cd	(100%): 1455 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

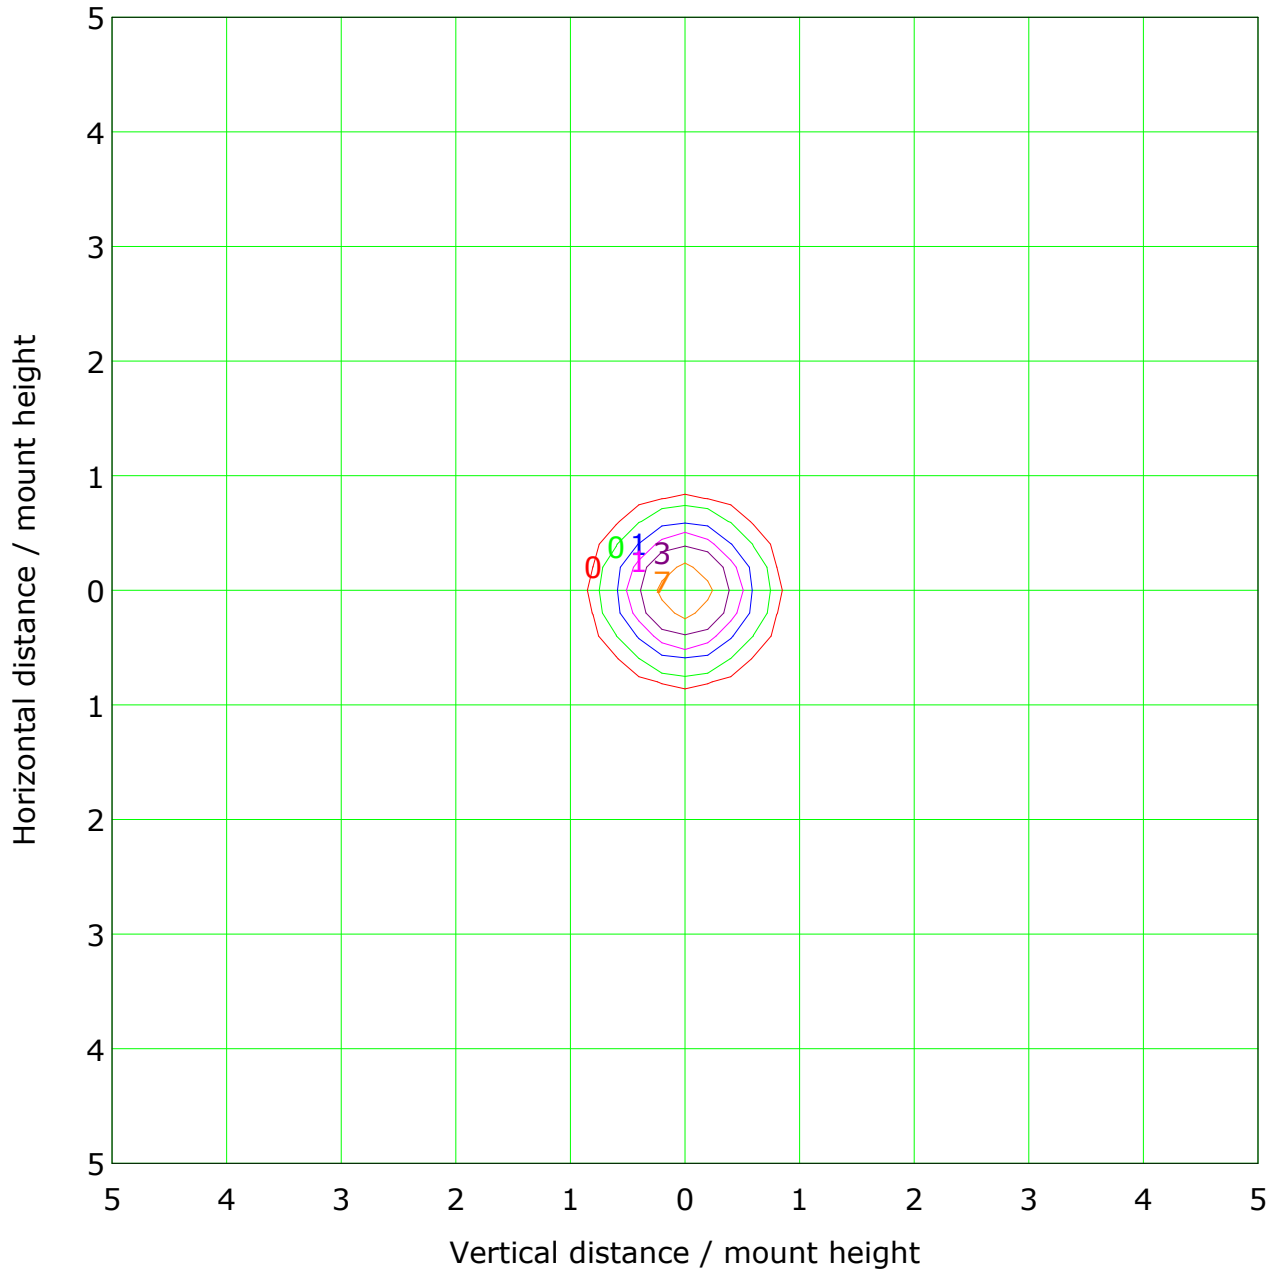


Mounting Height: 10m    Max Lux(100%): 15 lx			
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	1 lx
— ( 20%):	3 lx	— ( 50%):	7 lx
— (100%):	15 lx		

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Illuminance at a Distance

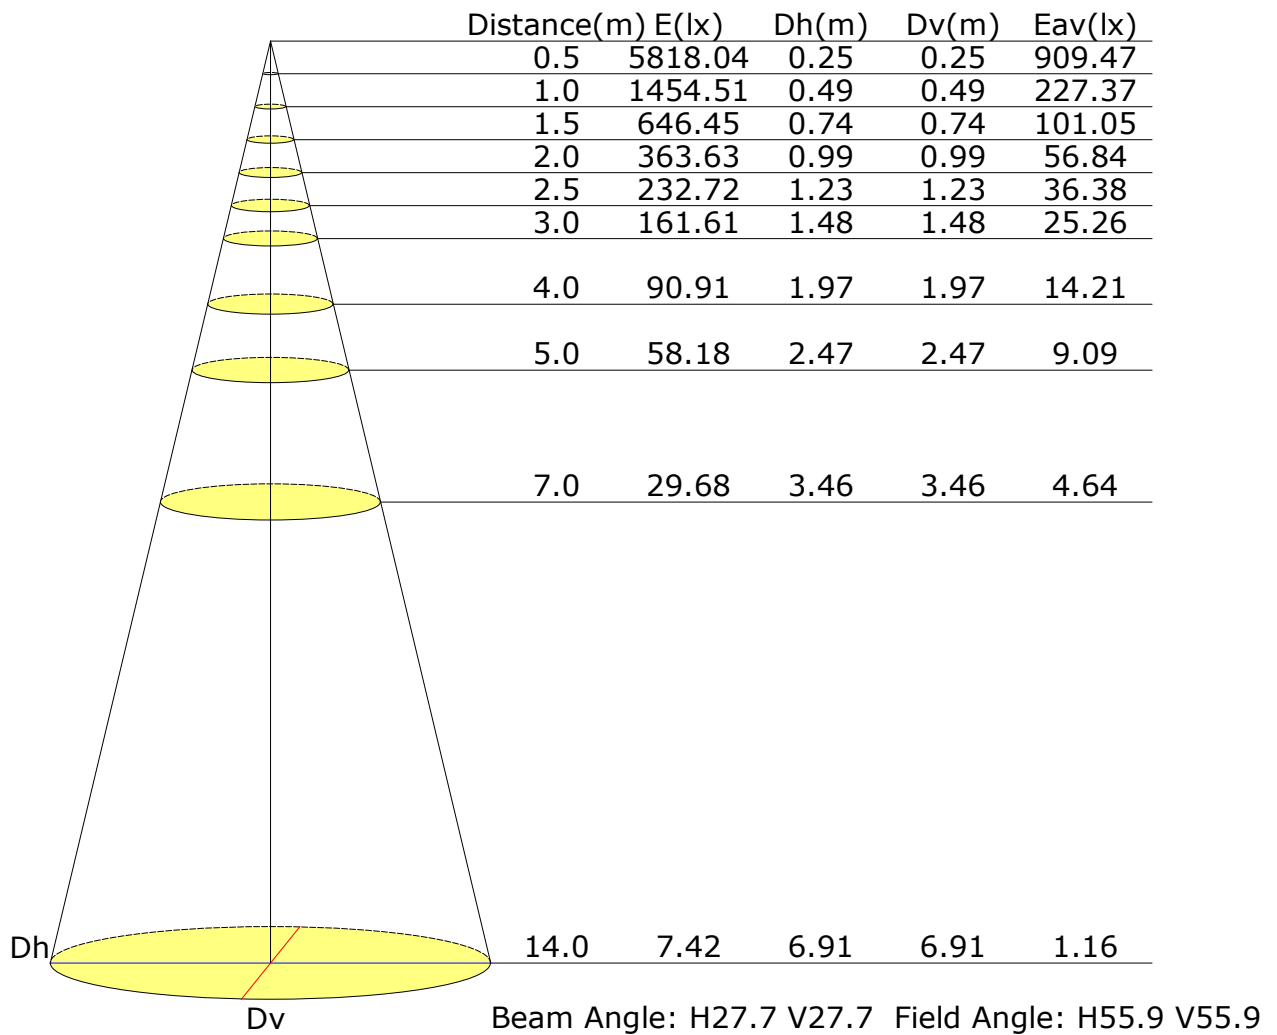

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## Vertical IsoLux Plot

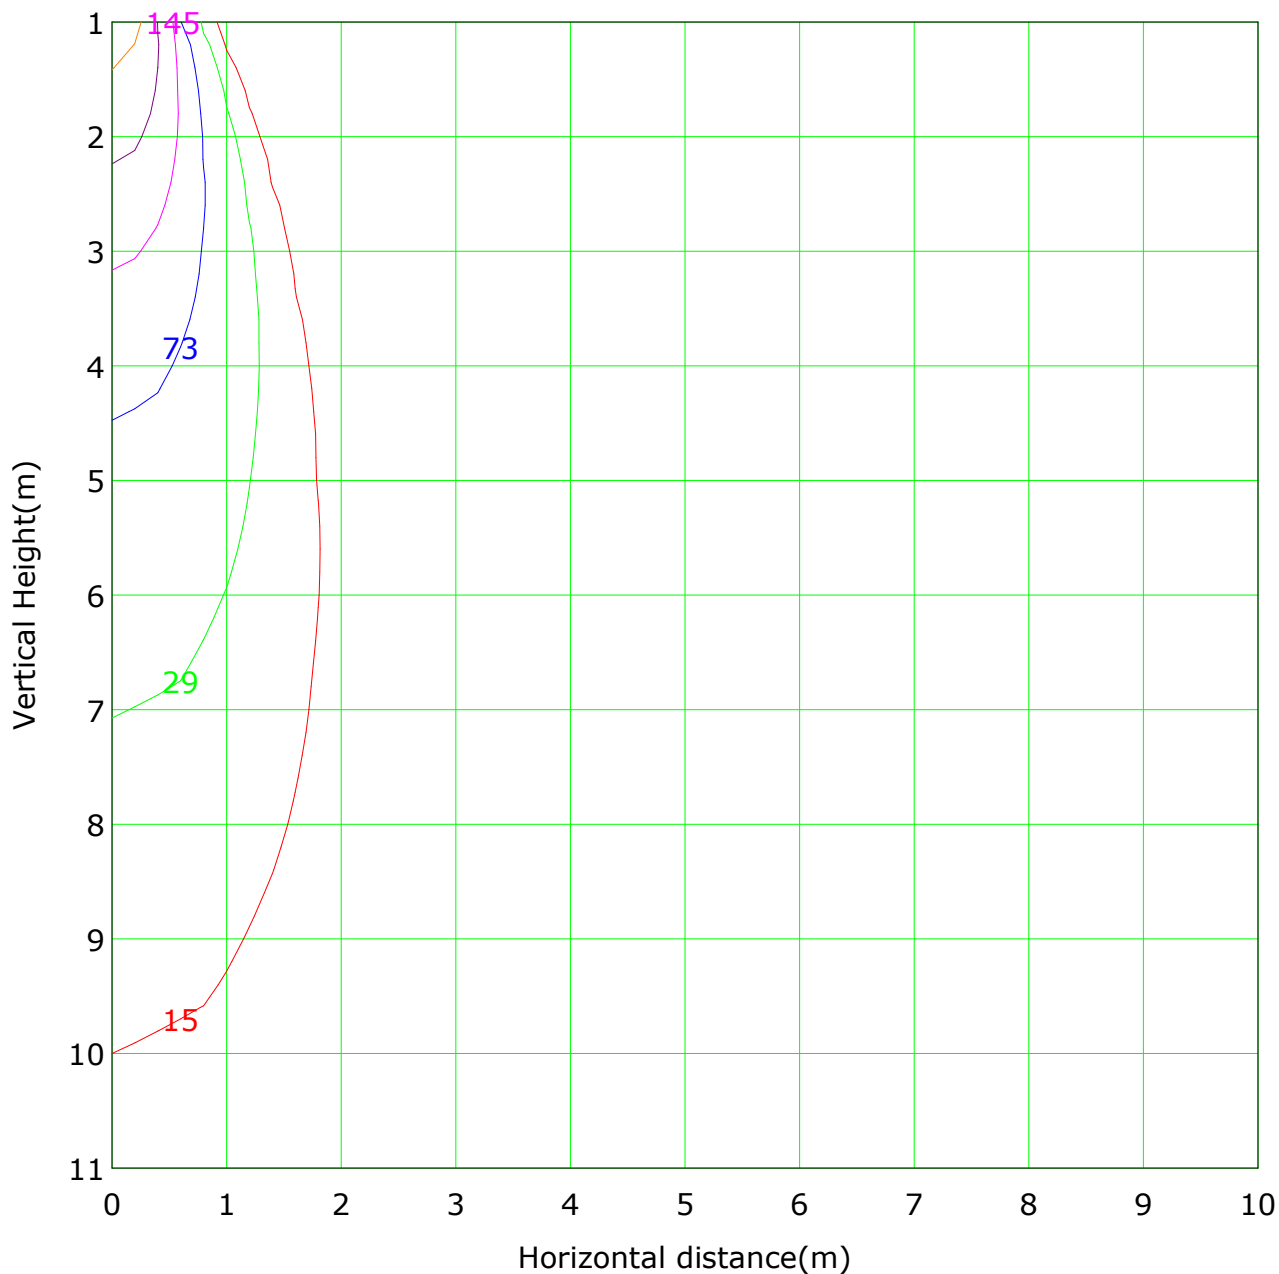


Lowest(m): 1m Highest(m): 11 Max Lux: 1455

( 1%): 15 lx	( 2%): 29 lx
( 5%): 73 lx	( 10%): 145 lx
( 20%): 291 lx	( 50%): 727 lx
(100%): 1455 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

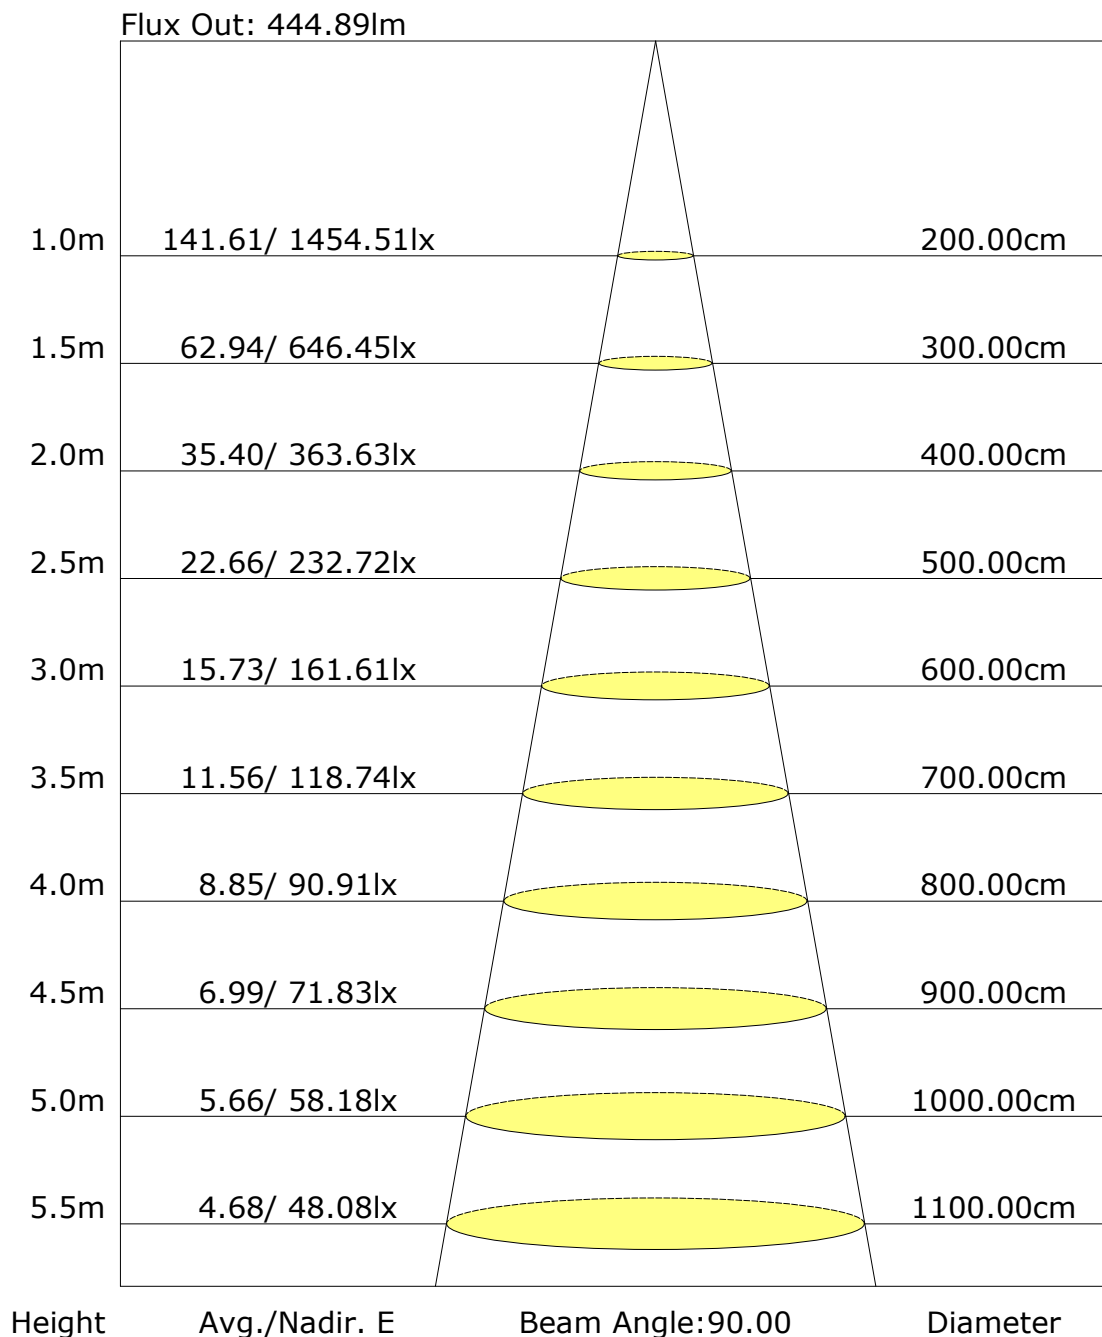

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: