

Report No.: 56.07515 PURE Downlight

Test Time: 2023-06-03 21:24

Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Luminaire Description: 34D

Current: 0.040 A

Power Factor: 0.936

Voltage: 220.0 V

Power: 8.20 W

Photometric Results

CIE Class: Direct

Measurement Flux: 425.9 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H33.8

Vertical Diffuse Angle(50%): V33.8

Luminaire Efficacy Rating (LER): 52

Max. Intensity: 997.72 cd

Total Rated Lamp Lumens: 425.9 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 997.72 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

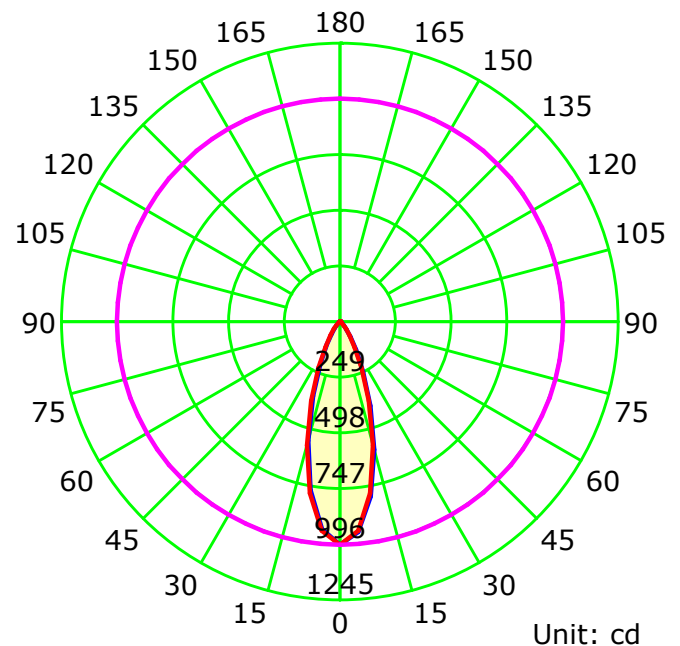

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

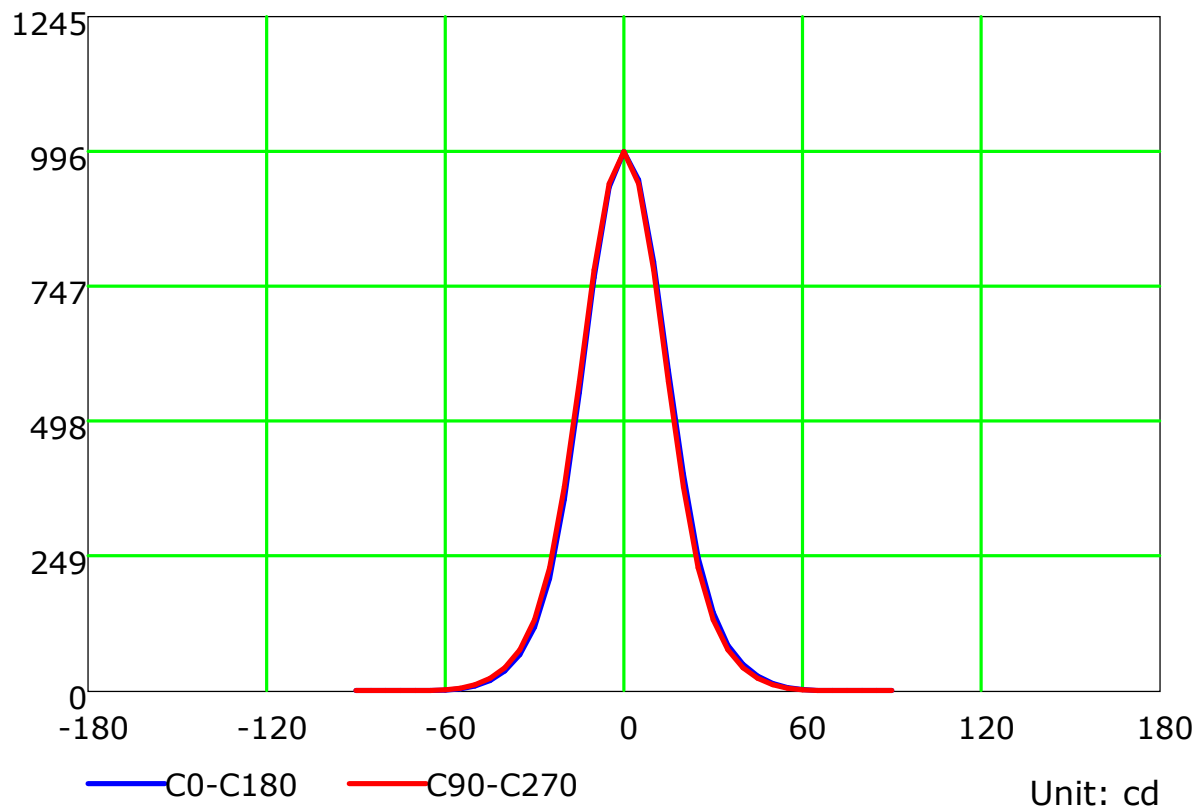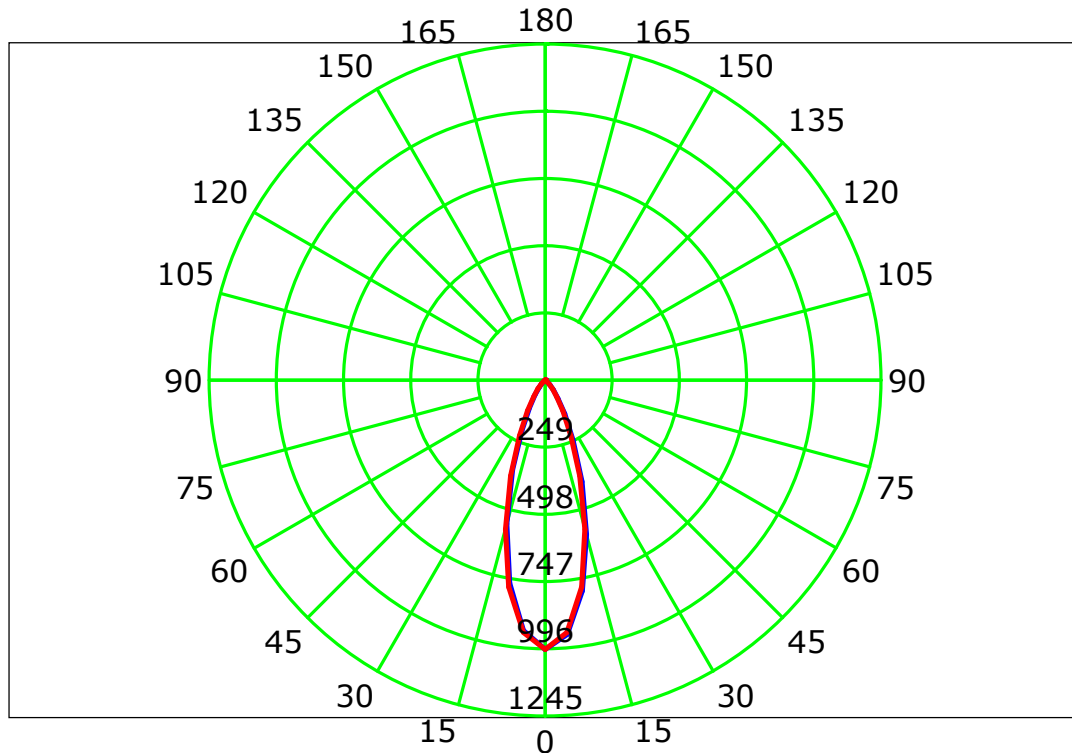

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

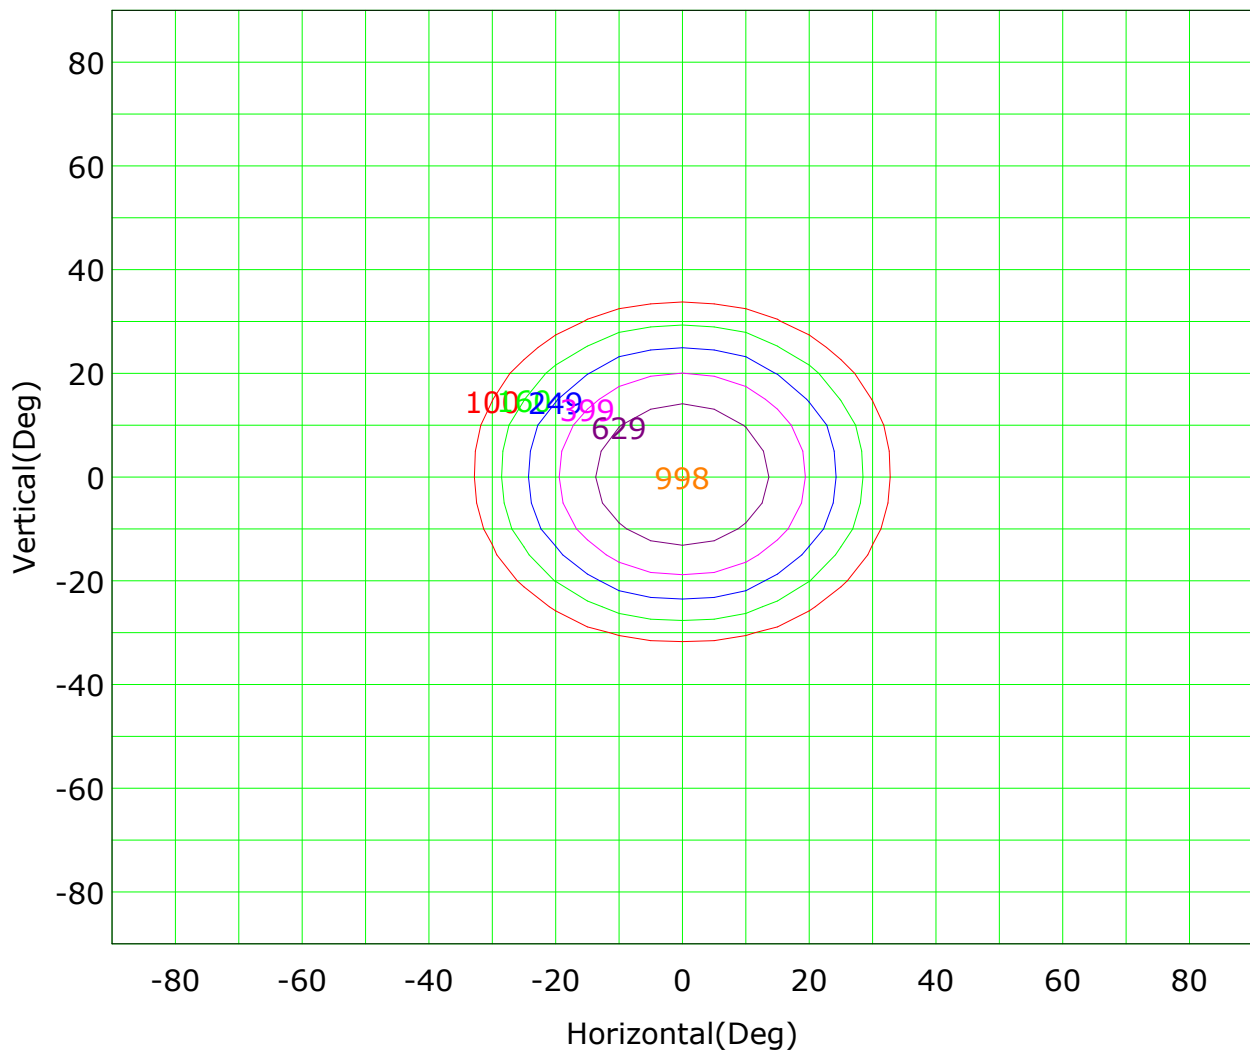

Imax (100%): 998 cd

(10%): 100 cd	(16%): 160 cd
(25%): 249 cd	(40%): 399 cd
(63%): 629 cd	(100%): 998 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

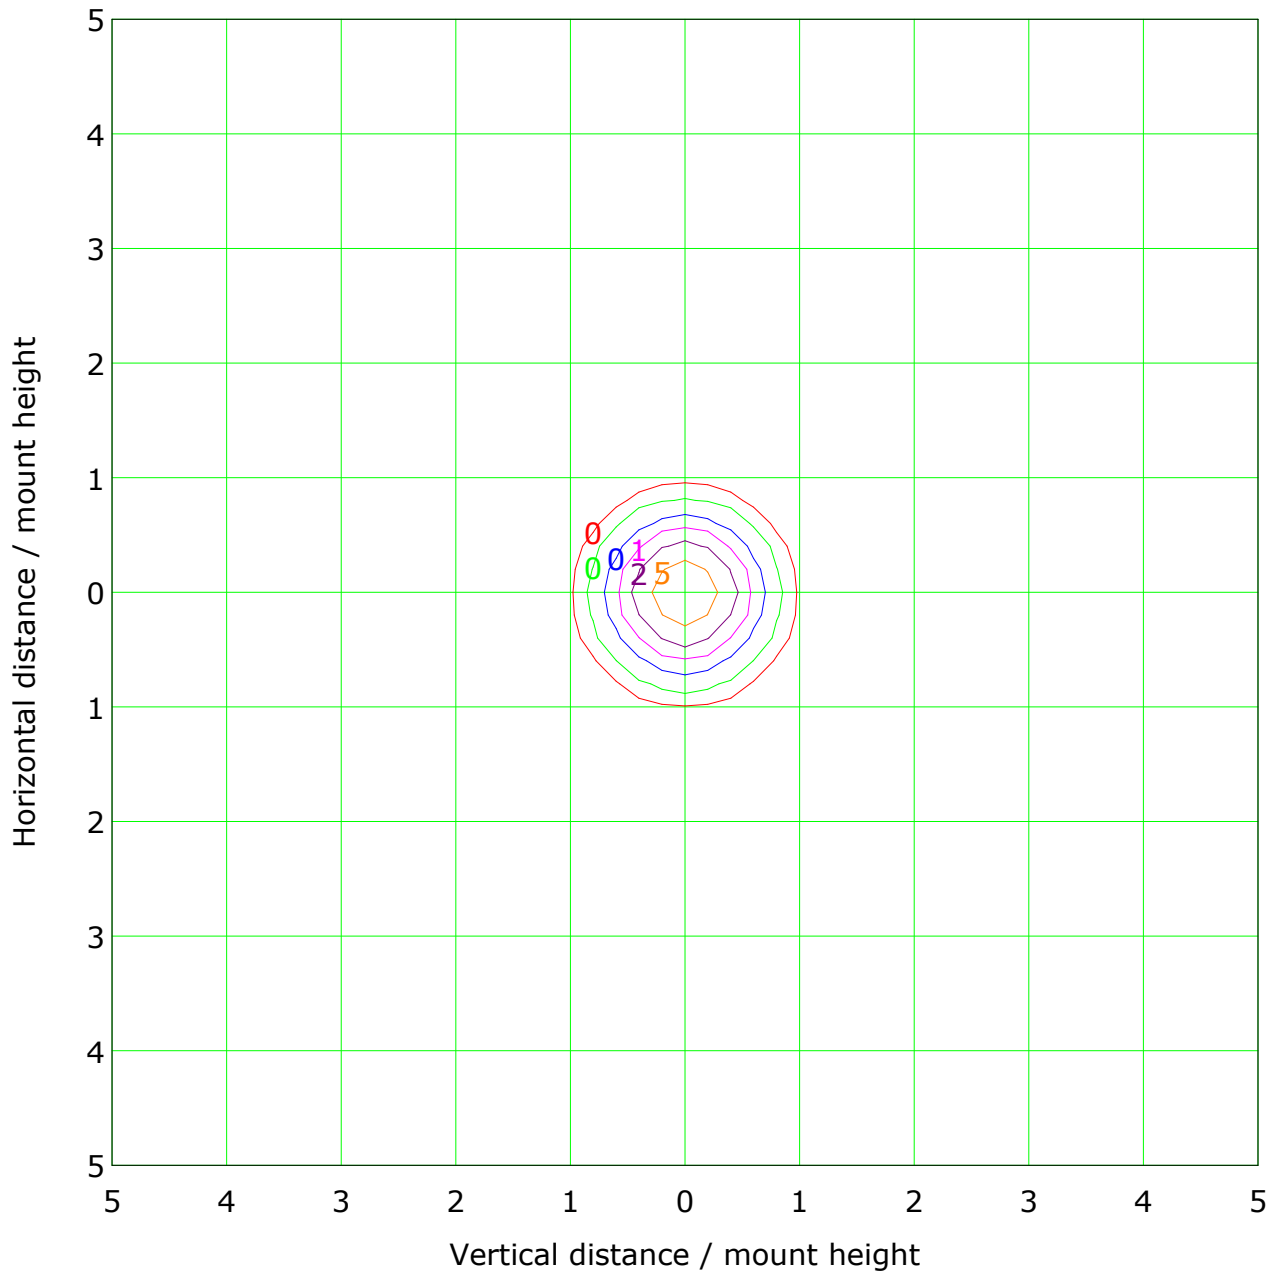


Mounting Height: 10m Max Lux(100%): 10 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	0 lx	— (10%):	1 lx
— (20%):	2 lx	— (50%):	5 lx
— (100%):	10 lx		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

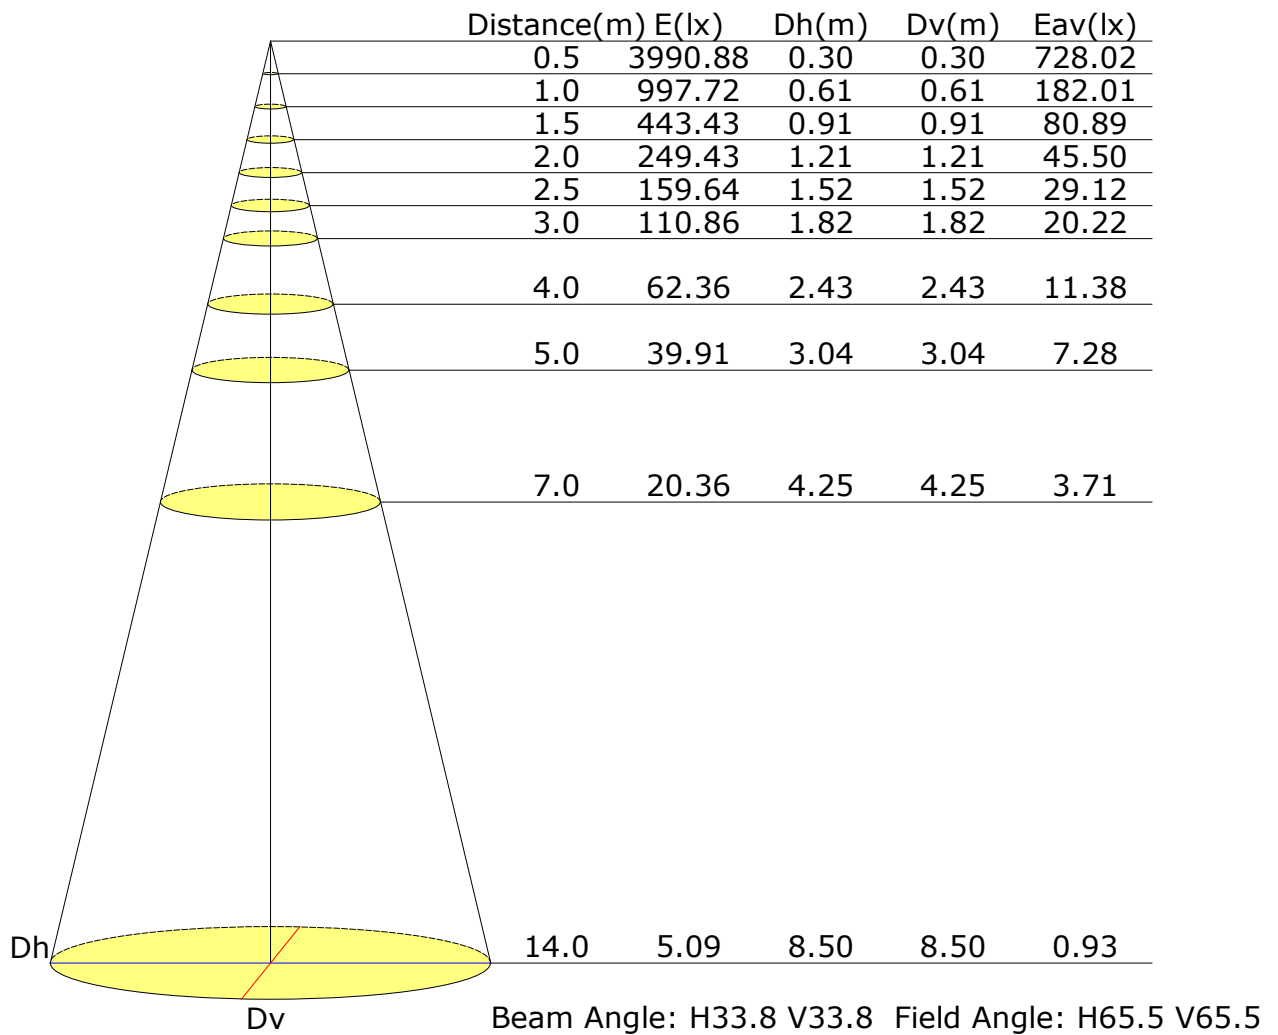

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Vertical IsoLux Plot

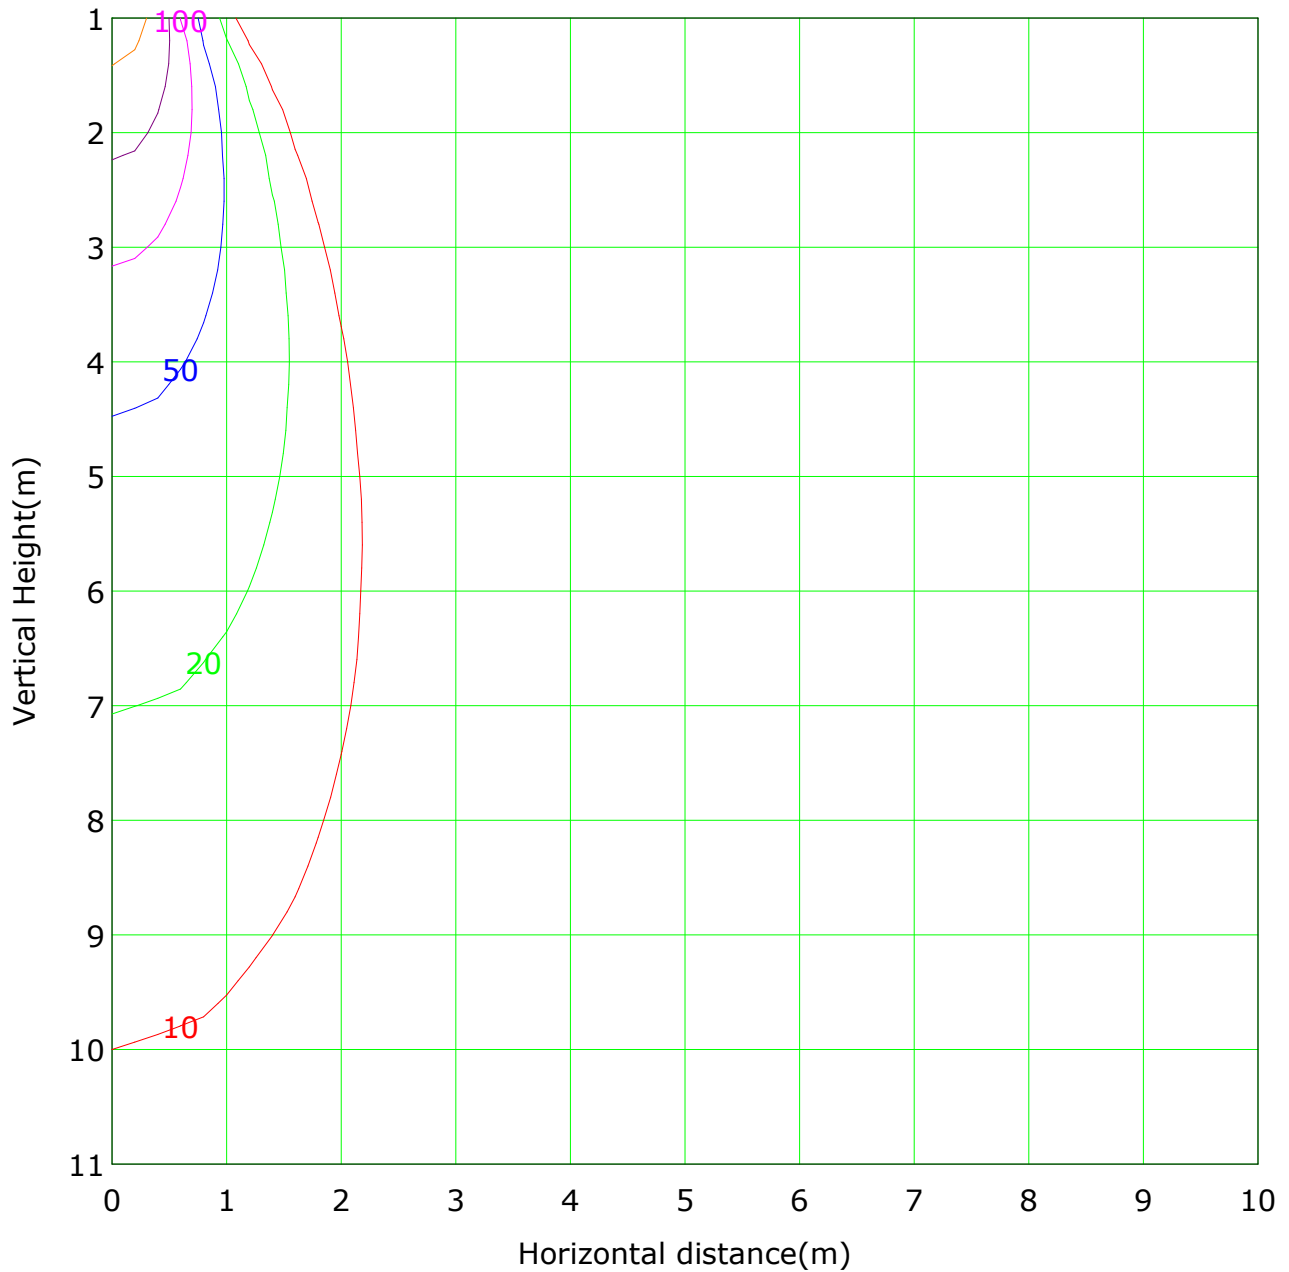


Lowest(m): 1m Highest(m): 11 Max Lux: 998

(1%): 10 lx	(2%): 20 lx
(5%): 50 lx	(10%): 100 lx
(20%): 200 lx	(50%): 499 lx
(100%): 998 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

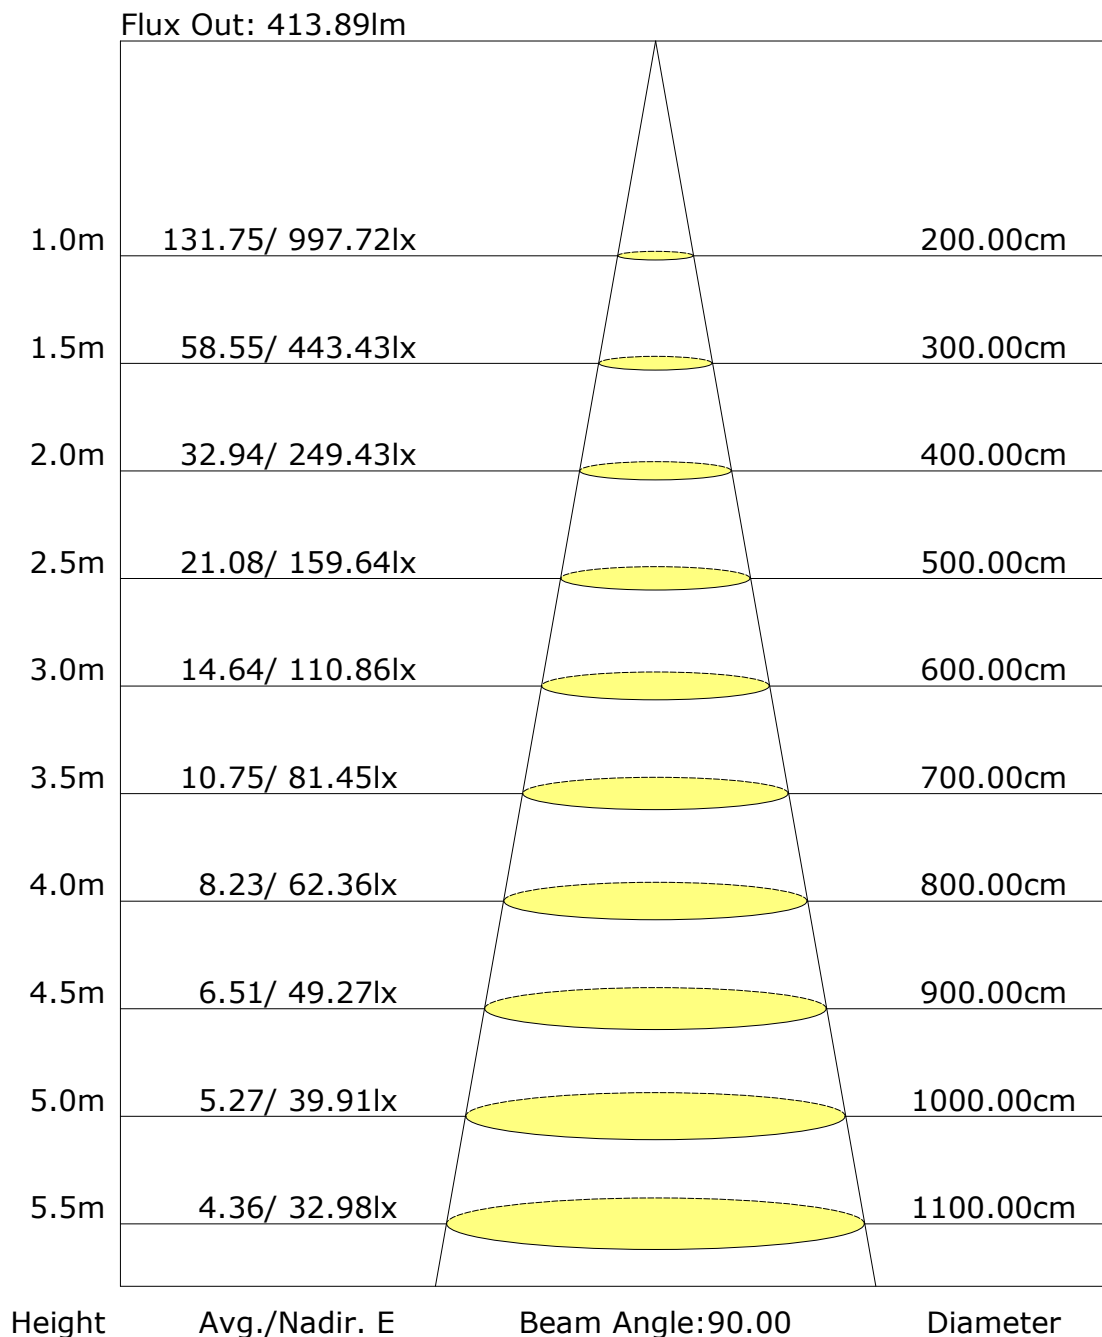

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: