



51.07517 PURE Recessed Downlight



IP20

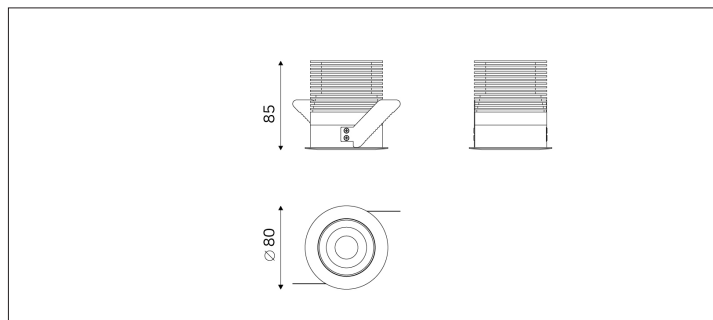

Light Distribution	PURE Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	15D/33D/45D
Cut Out	75mm
Connected Load	17W
Luminous Flux Of The Luminaire	778lm
Luminaire Efficacy	47lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.7Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		33°
1.0	1834	0.61
2.0	458	1.22
3.0	203	1.82
4.0	114	2.43
5.0	73	3.04

Application areas: High end residential and retail projects, hotels, museums and galleries.