

Report No.: 91.06011 PURE Surfae Mounted Test Time: 2023-06-03 11:02

Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90
Luminaire Description: 18D
Current: 0.054 A
Power Factor: 0.967
Voltage: 210.0 V
Power: 11.10 W


Photometric Results

CIE Class: Direct
Measurement Flux: 488 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H18.4
Vertical Diffuse Angle(50%): V18.4
Luminaire Efficacy Rating (LER): 44
Max. Intensity: 2957.45 cd


Total Rated Lamp Lumens: 488.0 lm
Efficiency: 100%
Upward Ratio: 0%

Central Intensity: 2957.45 cd
Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

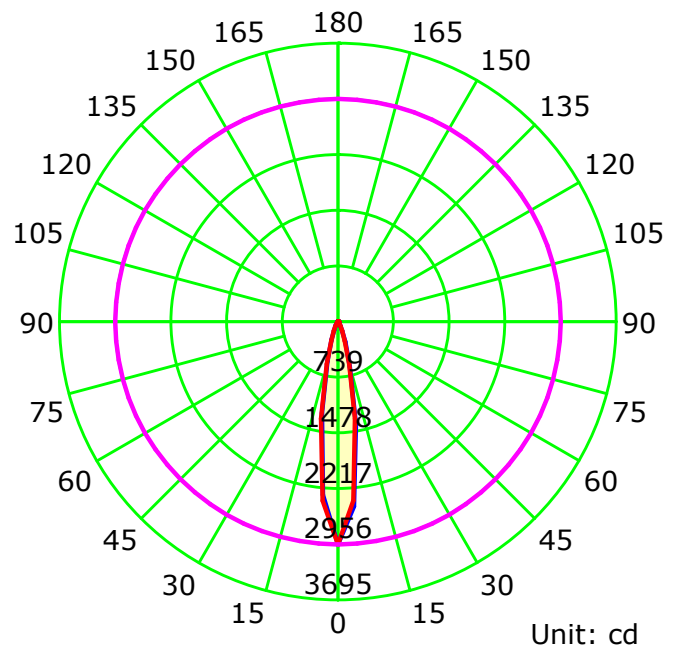


— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve

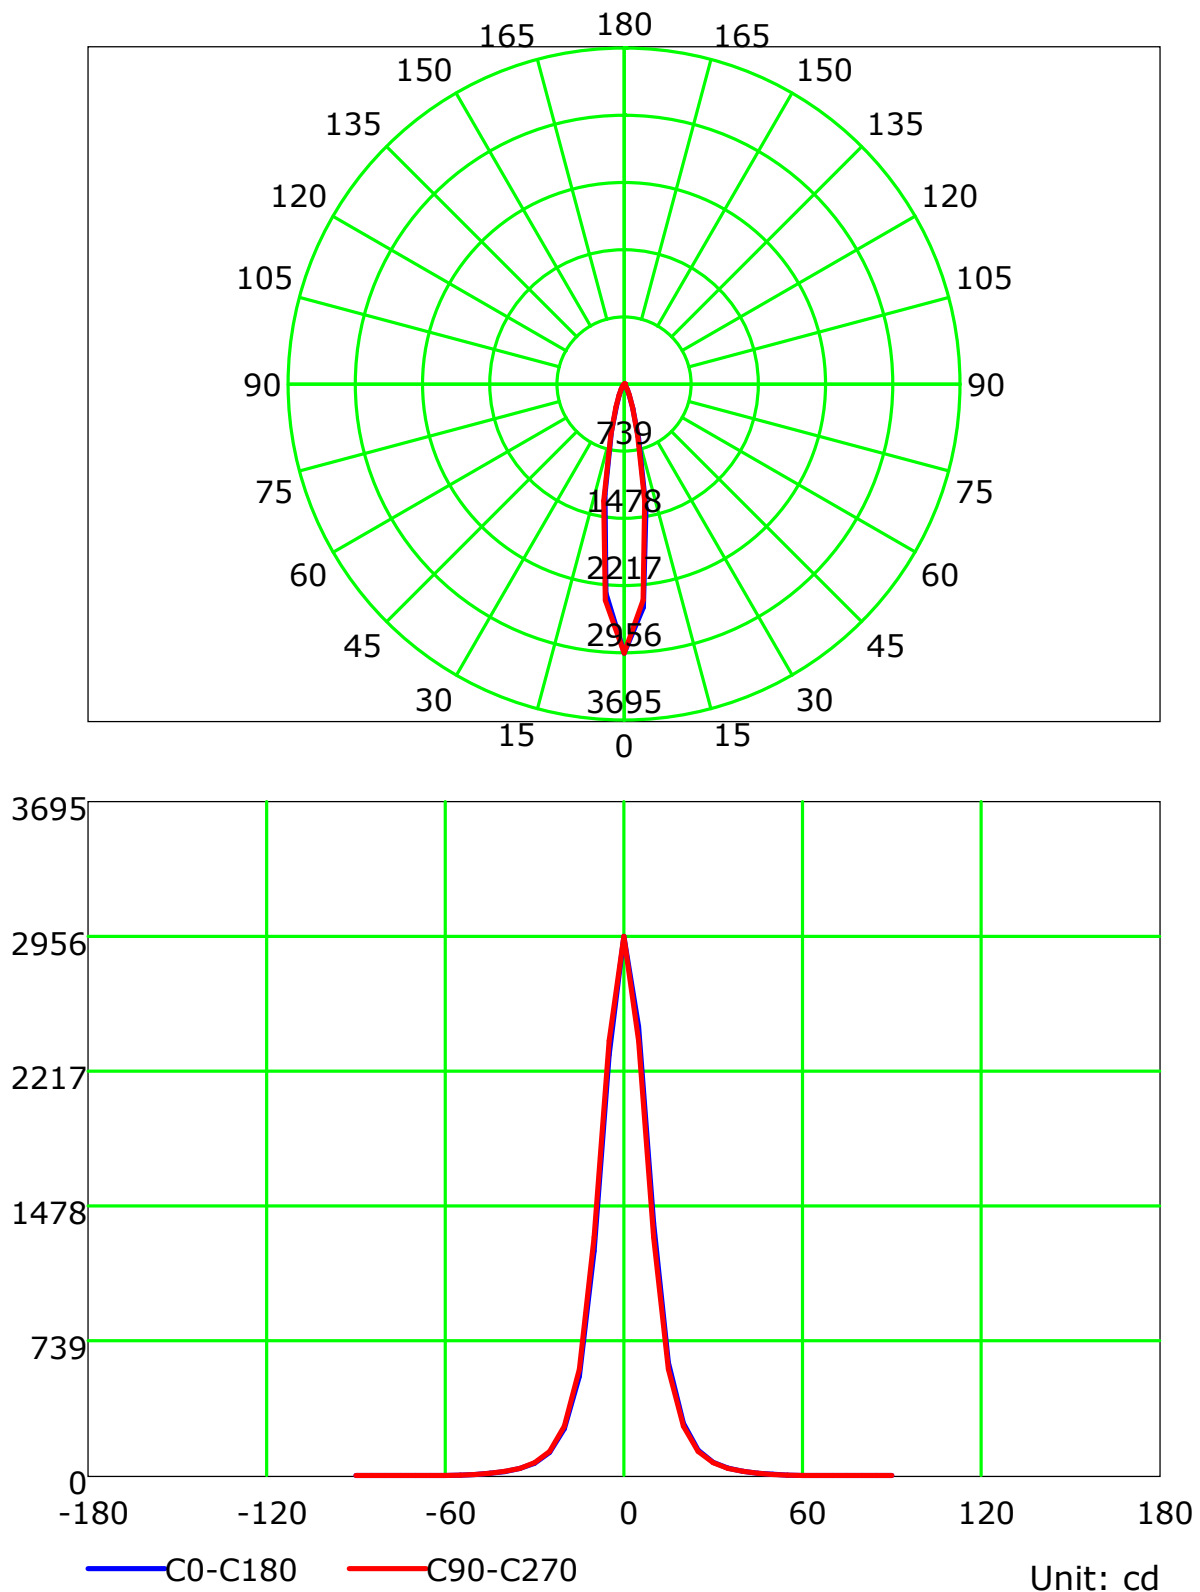

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

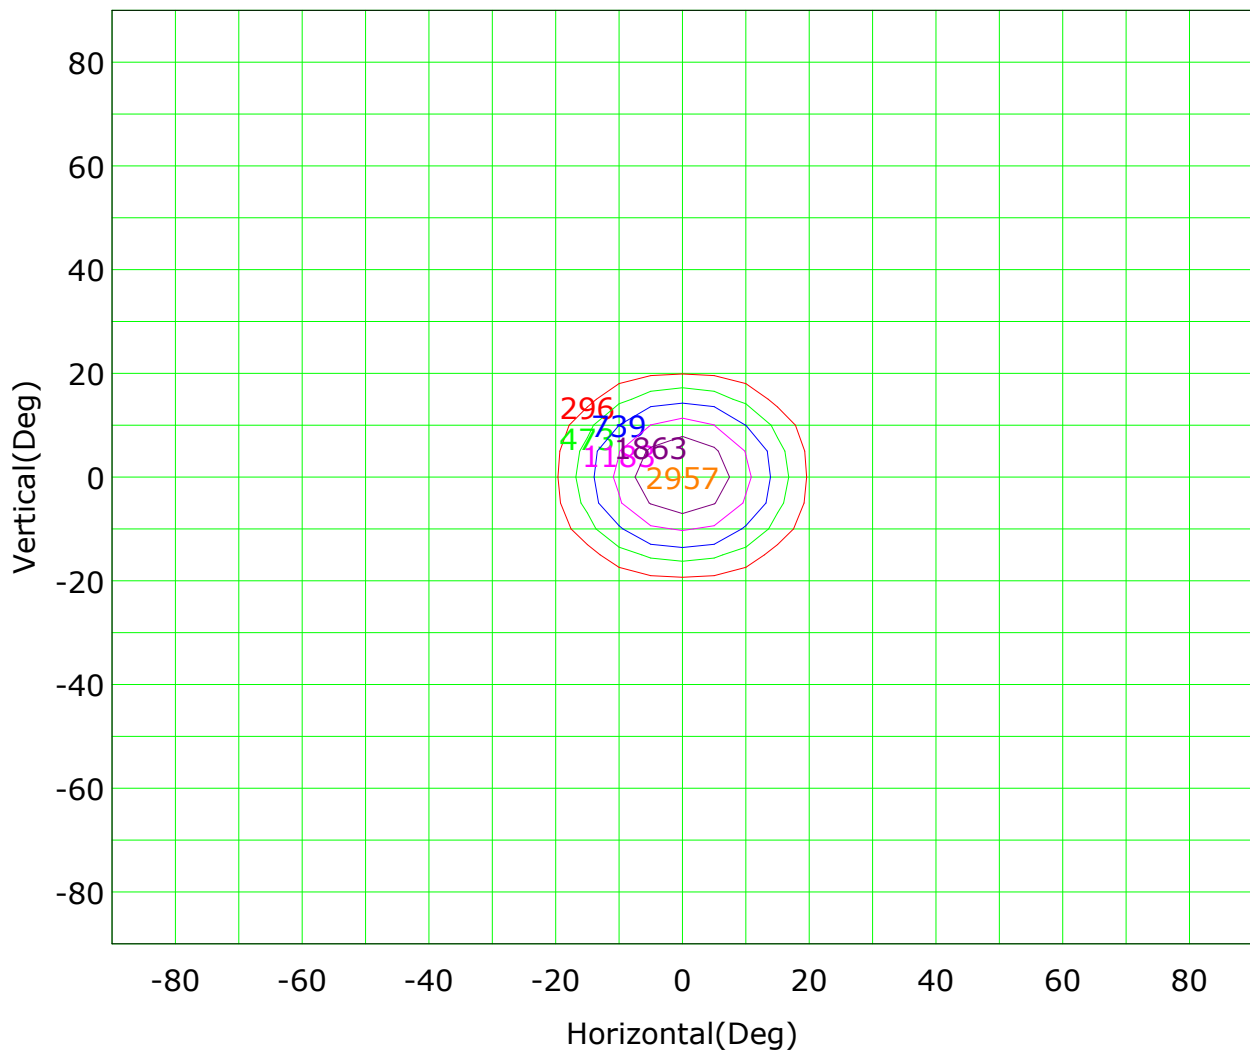

Imax (100%): 2957 cd

(10%): 296 cd	(16%): 473 cd
(25%): 739 cd	(40%): 1183 cd
(63%): 1863 cd	(100%): 2957 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

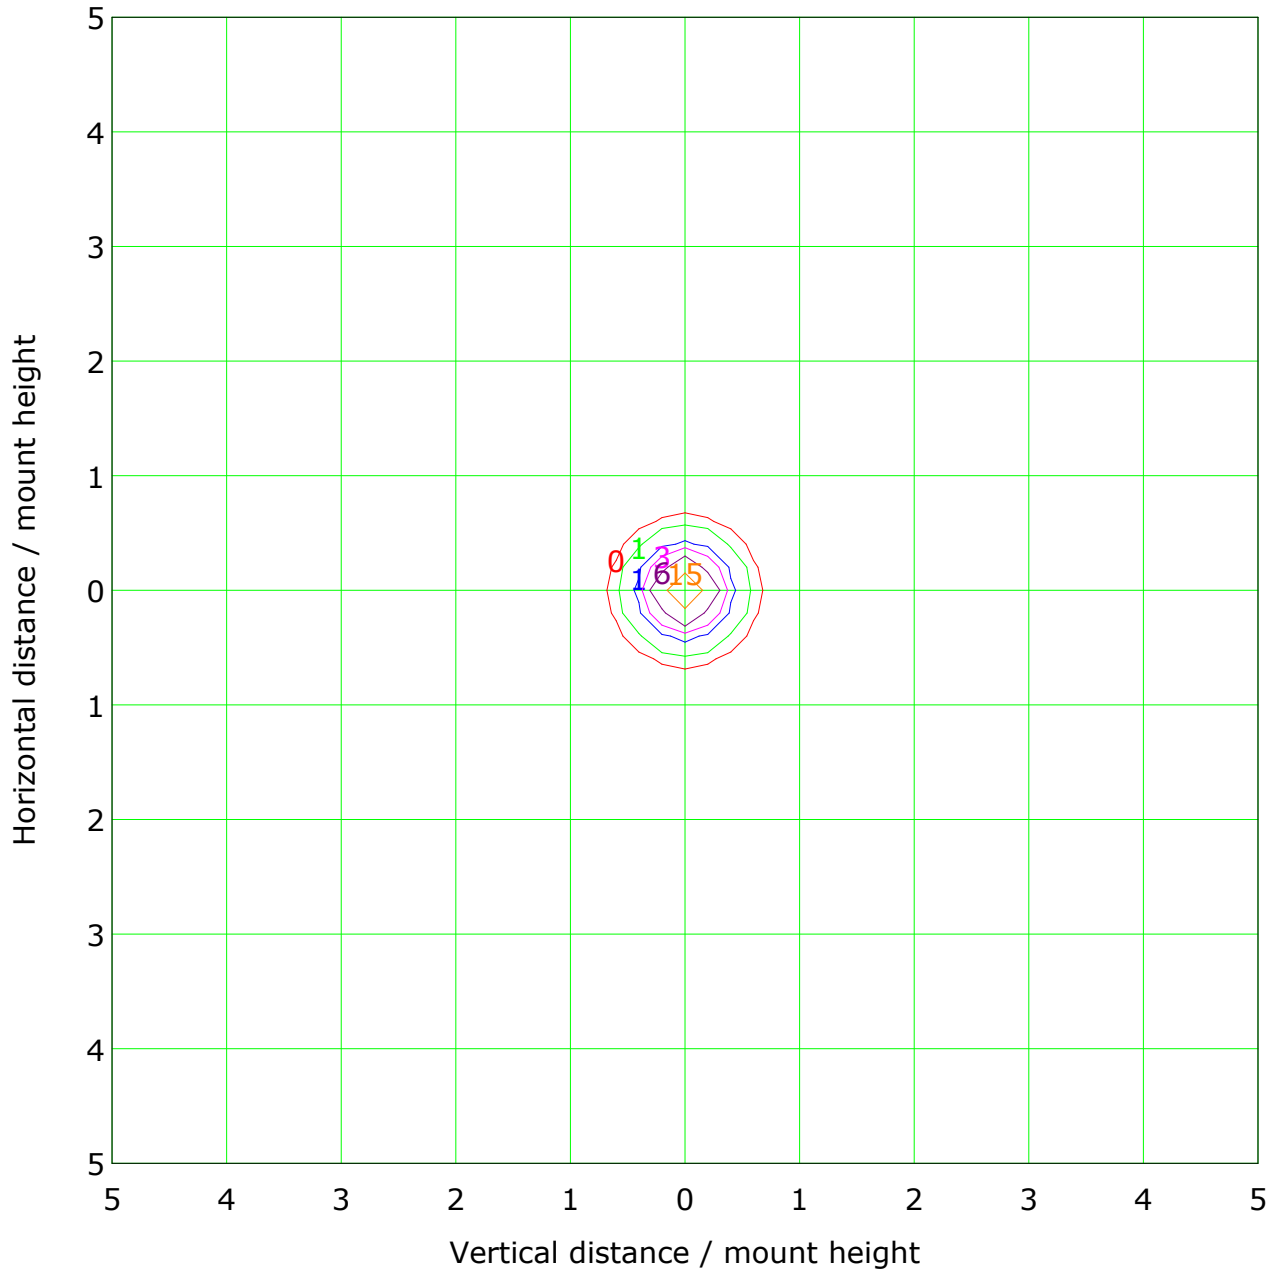

Mounting Height: 10m		Max Lux(100%): 30 lx	
(1%):	0 lx	(2%):	1 lx
(5%):	1 lx	(10%):	3 lx
(20%):	6 lx	(50%):	15 lx
(100%):	30 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

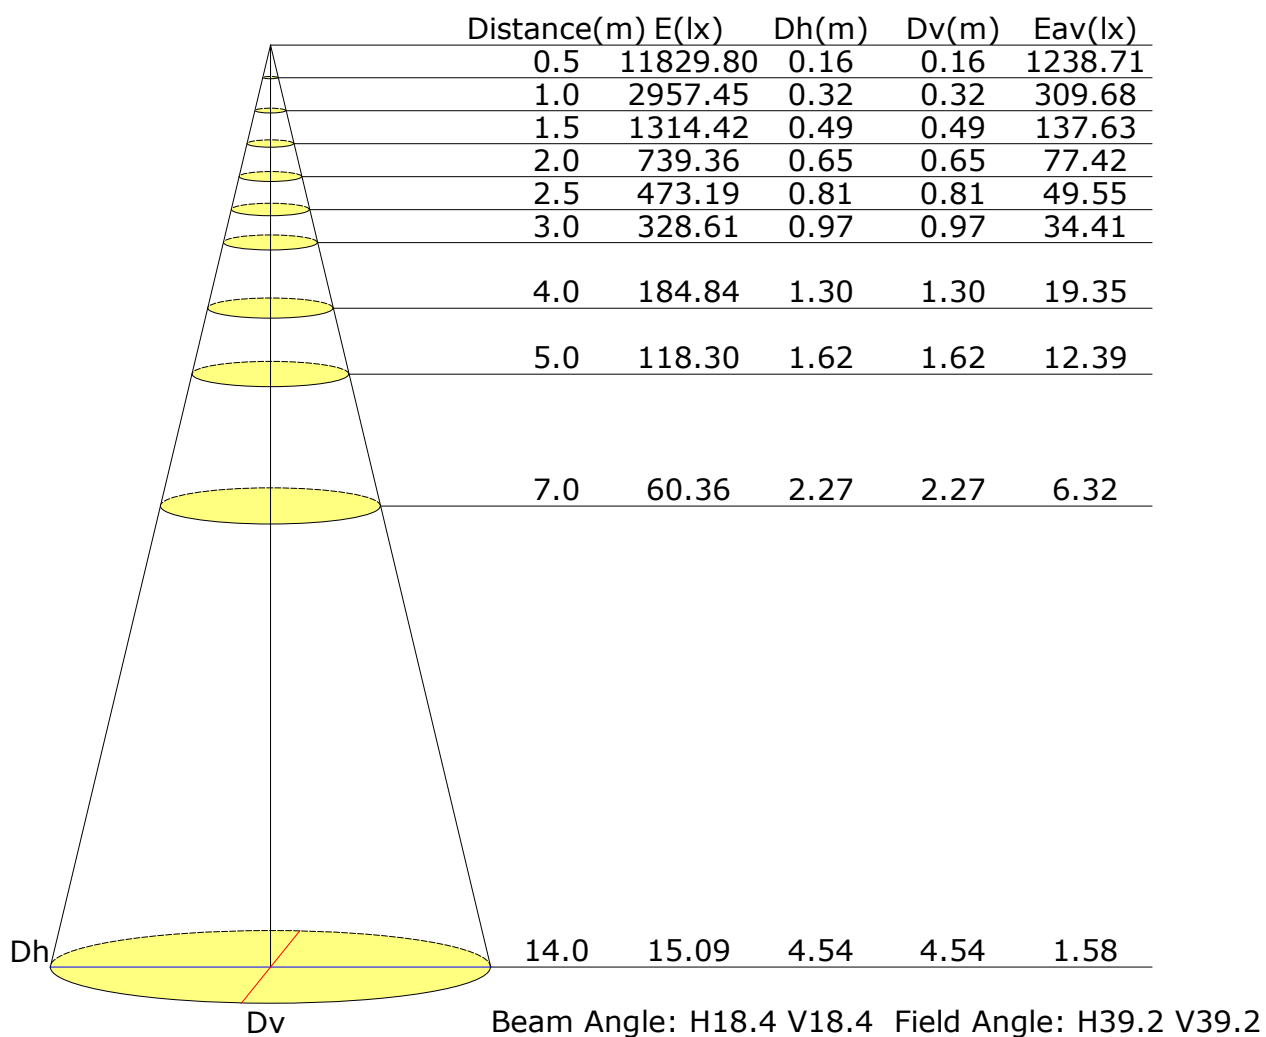

Vertical IsoLux Plot

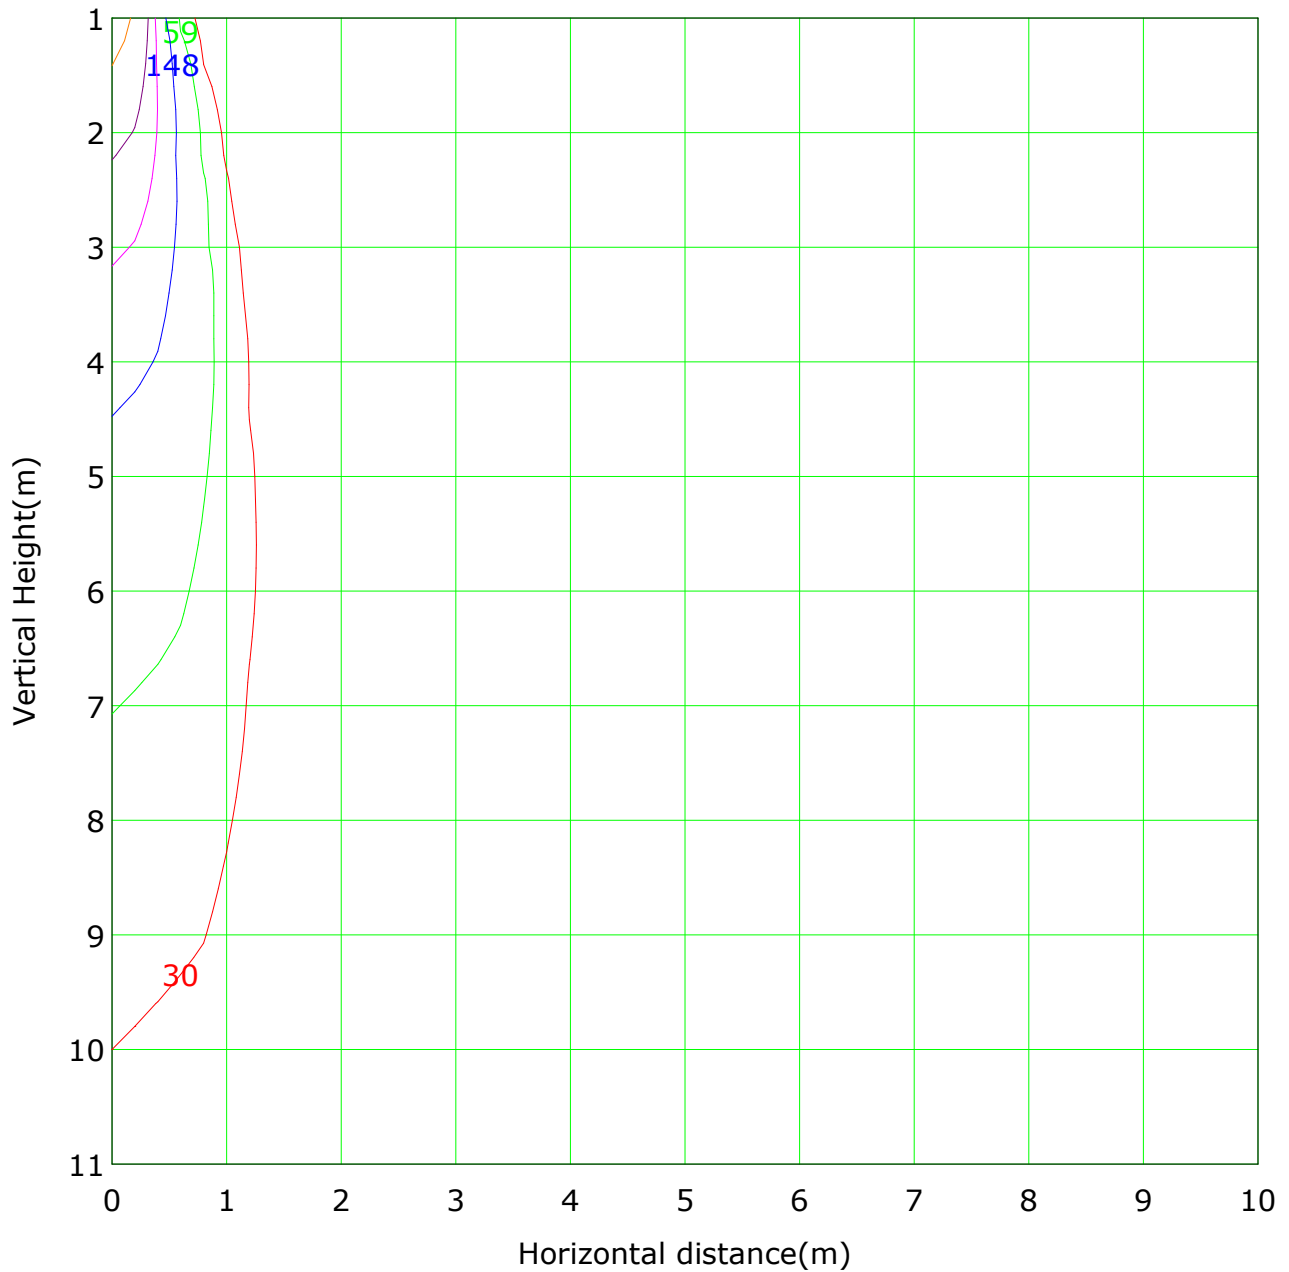


Lowest(m): 1m Highest(m): 11 Max Lux: 2957

(1%): 30 lx	(2%): 59 lx
(5%): 148 lx	(10%): 296 lx
(20%): 591 lx	(50%): 1479 lx
(100%): 2957 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

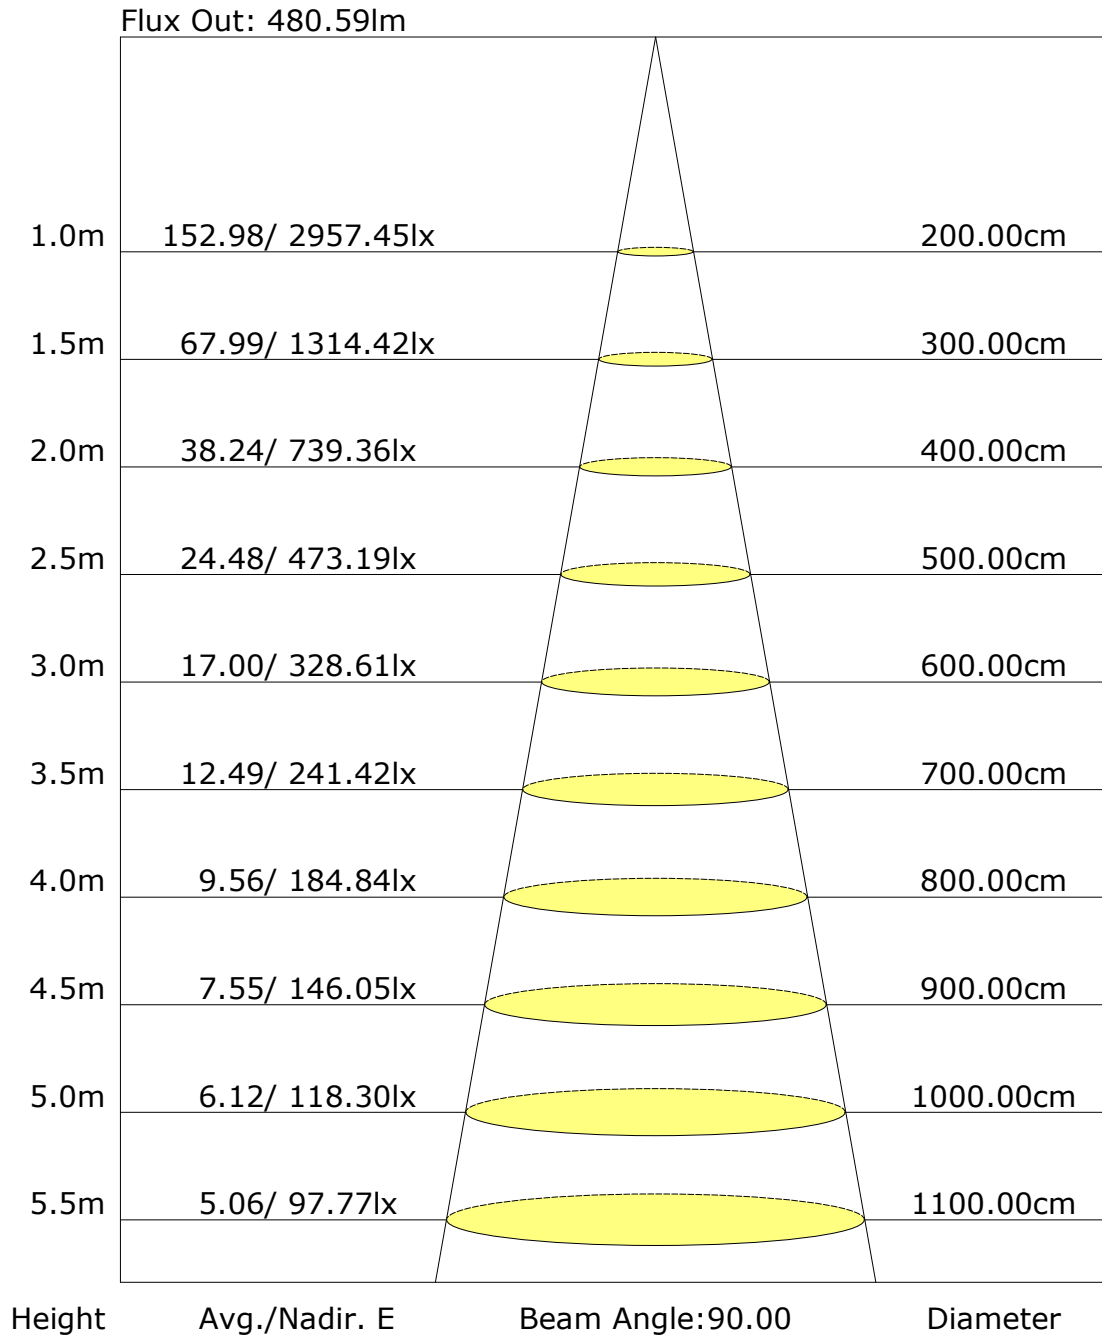

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: