



52.07519 PURE Recessed Downlight



IP20

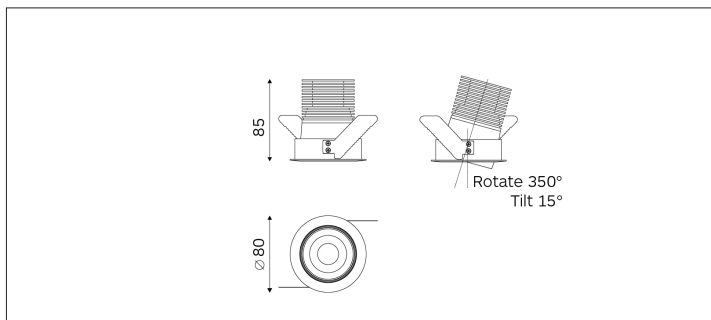

Light Distribution	PURE Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	15D/33D/44D
Cut Out	75mm
Connected Load	12W
Luminous Flux Of The Luminaire	512lm
Luminaire Efficacy	50m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.7Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		33°
1.0	1220	0.60
2.0	305	1.21
3.0	135	1.81
4.0	76	2.41
5.0	48	3.01

Application areas: High end residential and retail projects, hotels, museums and galleries.