




# 56.05523 PURE Recessed Downlight

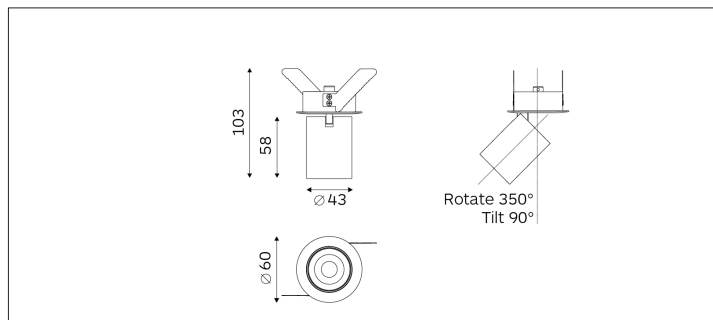

IP20



| Light Distribution             | PURE Recessed Downlight  |
|--------------------------------|--------------------------|
| Colour Temperature             | 2700/3000/3500/4000K     |
| Colour Rendition Index         | CRI 90                   |
| Optics                         | LENS                     |
| Beam Angle                     | 18D/28D/37D/48D          |
| Cut Out                        | 55mm                     |
| Connected Load                 | 7W                       |
| Luminous Flux Of The Luminaire | 291lm                    |
| Luminaire Efficacy             | 44lm/W                   |
| Colour Deviation               | SDCM < 5                 |
| Light Source                   | LED                      |
| LED Type                       | COB                      |
| Dimming Method                 | Triac/1-10V/ Dali        |
| Cover Material                 | Aluminum                 |
| Body Material                  | Aluminum                 |
| IP Rating                      | IP20                     |
| Housing Colour                 | Sandy White/ Sandy Black |
| Weight                         | 0.4Kg                    |
| Technical Region               | 220-240V 50/60Hz         |

## Light Beam Table

| h(m) | E(lx) | D(m) |
|------|-------|------|
|      |       | 28°  |
| 1.0  | 936   | 0.49 |
| 2.0  | 234   | 0.99 |
| 3.0  | 104   | 1.48 |
| 4.0  | 58    | 1.98 |
| 5.0  | 37    | 2.47 |

Application areas: High end residential and retail projects, hotels, museums and galleries.