

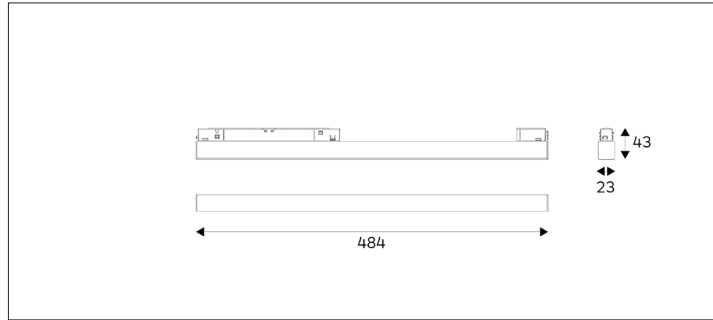


61.02347 SPARK 20 General Lighting



Connected Load	15W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Reflector
Beam Angle	105D
Track	Low Voltage Track
Light Distribution	SPARK 20 General Lighting
Luminous Flux Of The Luminaire	1211lm
Luminaire Efficacy	81m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	SMD
Dimming Method	Triac/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		105°
1.0	450	2.60
2.0	112	5.20
3.0	50	7.81
4.0	28	10.41
5.0	18	13.01

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.