

Report No.: 32.07315 EMMA Track Light

Test Time: 2023-09-09 15:08

## Luminaire Property

Luminaire Category: Bridgelux V13C 3000K CRI90

Voltage: 218.3 V

Current: 0.109 A

Power: 23.30 W

Power Factor: 0.975

## Photometric Results

CIE Class: Direct

Measurement Flux: 2892.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H28

Vertical Diffuse Angle(50%): V28

Luminaire Efficacy Rating (LER): 124

Max. Intensity: 10923.41 cd

Total Rated Lamp Lumens: 2892.8 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 10923.4 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

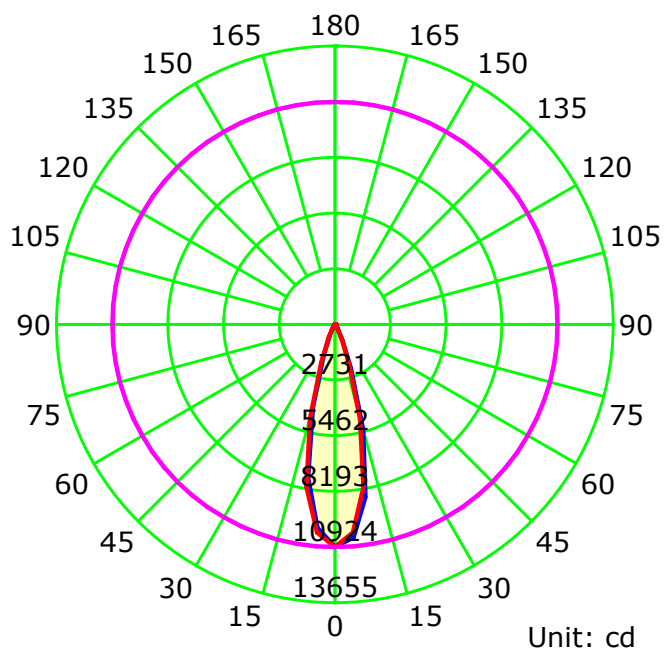

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

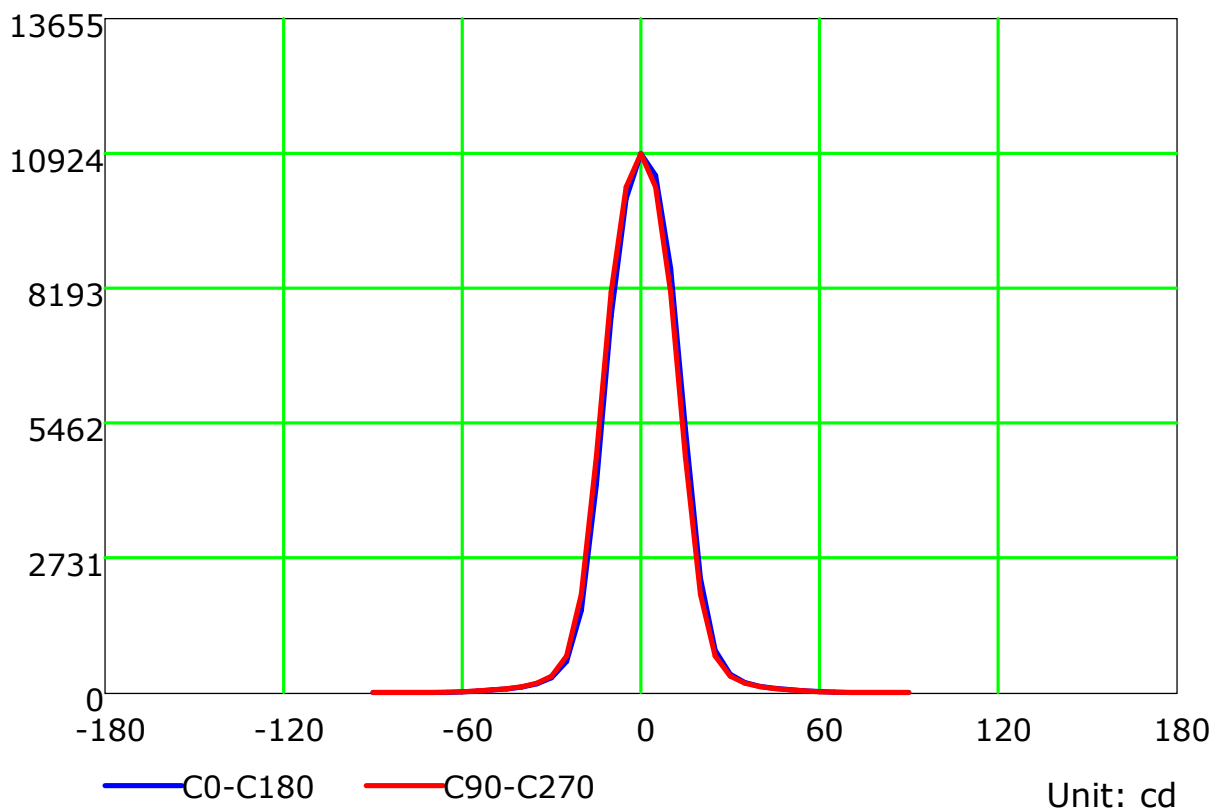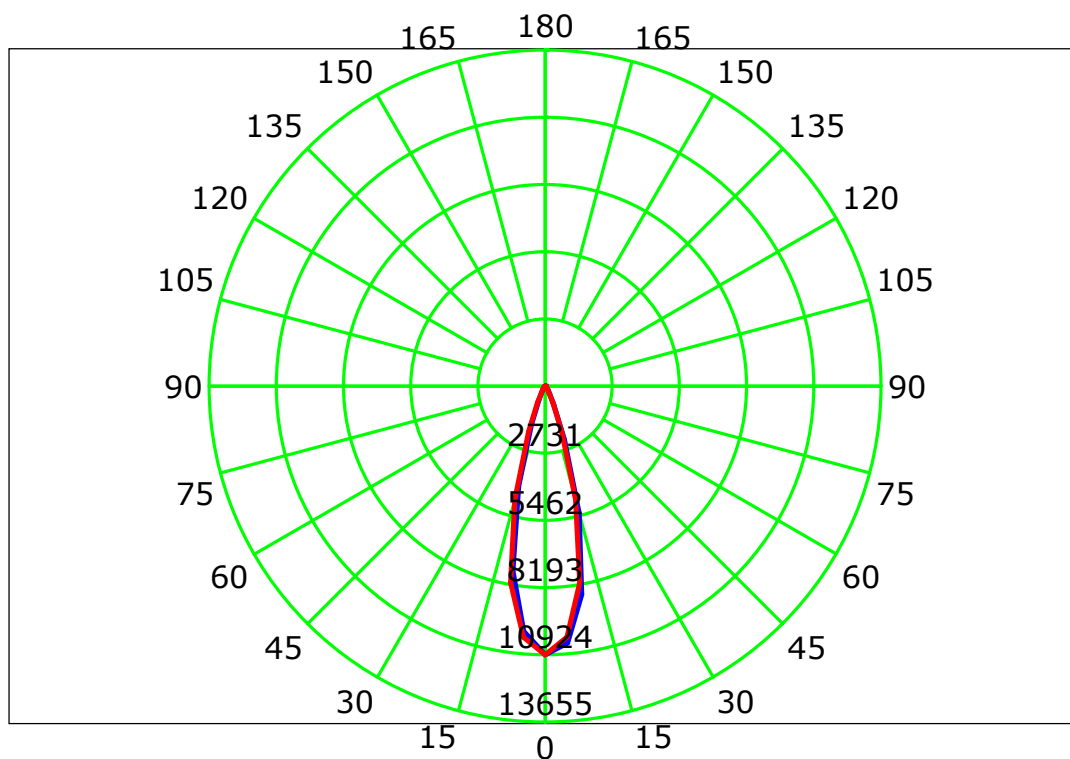

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

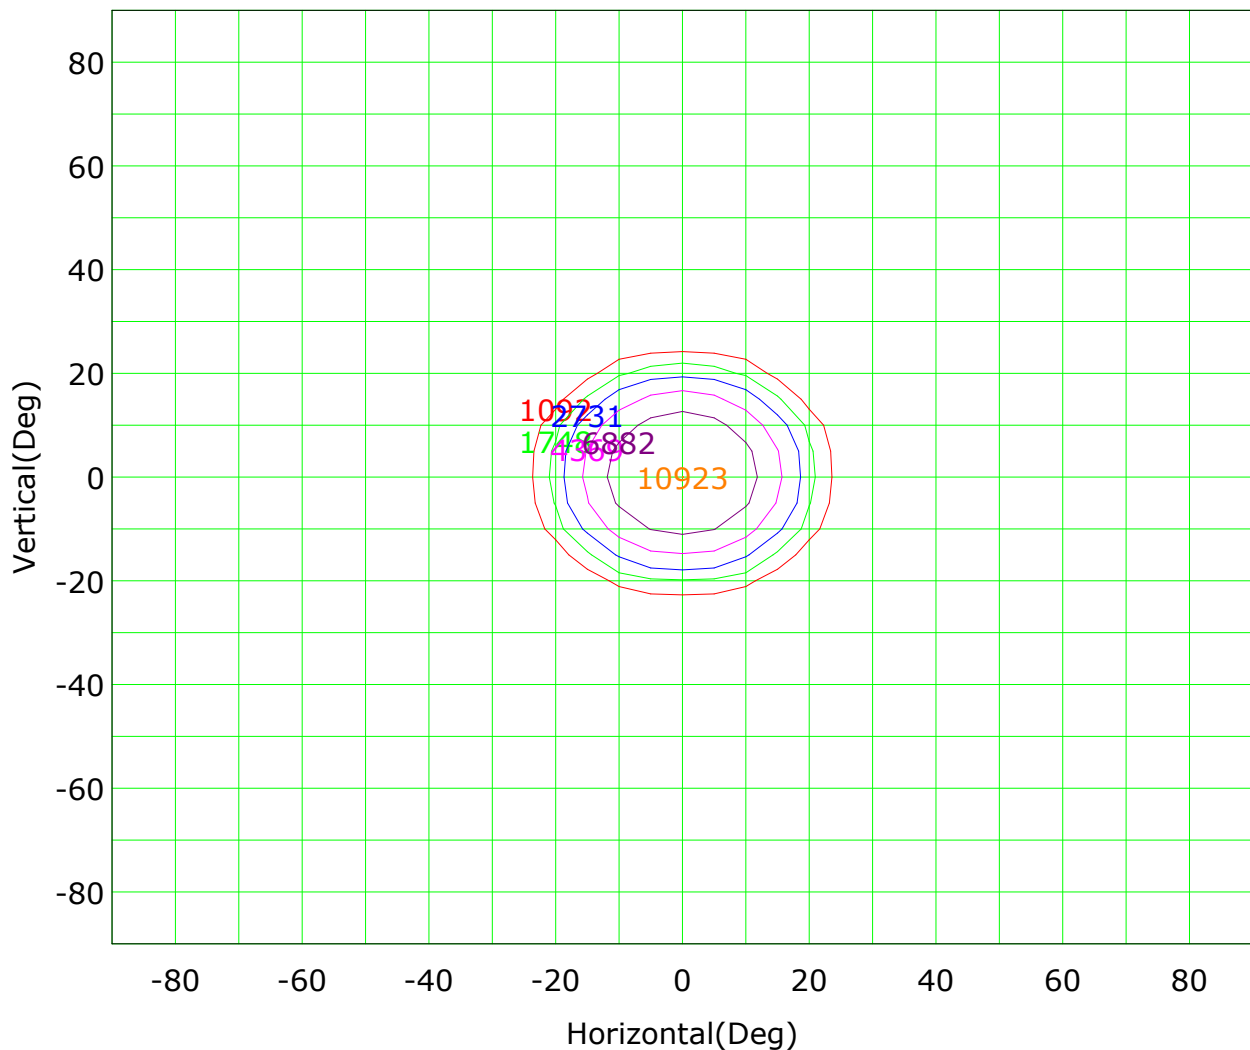

Imax (100%): 10923 cd

|                 |                  |
|-----------------|------------------|
| ( 10%): 1092 cd | ( 16%): 1748 cd  |
| ( 25%): 2731 cd | ( 40%): 4369 cd  |
| ( 63%): 6882 cd | (100%): 10923 cd |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

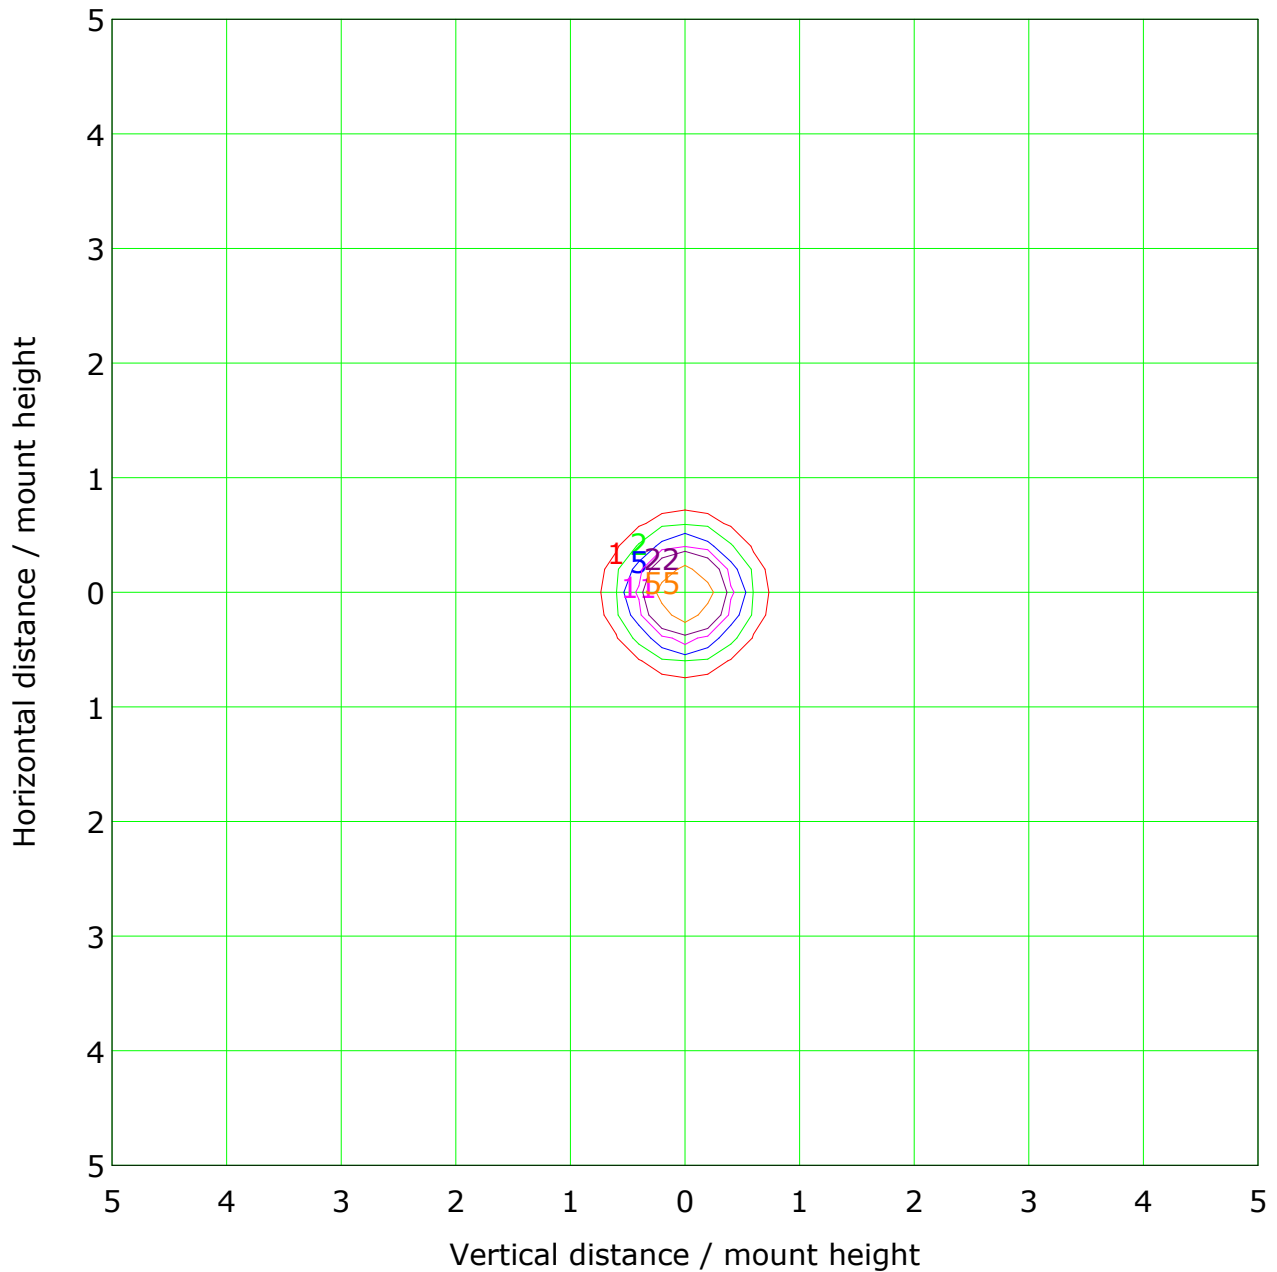

|                      |        |                       |       |
|----------------------|--------|-----------------------|-------|
| Mounting Height: 10m |        | Max Lux(100%): 109 lx |       |
| — ( 1%):             | 1 lx   | — ( 2%):              | 2 lx  |
| — ( 5%):             | 5 lx   | — ( 10%):             | 11 lx |
| — ( 20%):            | 22 lx  | — ( 50%):             | 55 lx |
| — (100%):            | 109 lx |                       |       |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

## Illuminance at a Distance

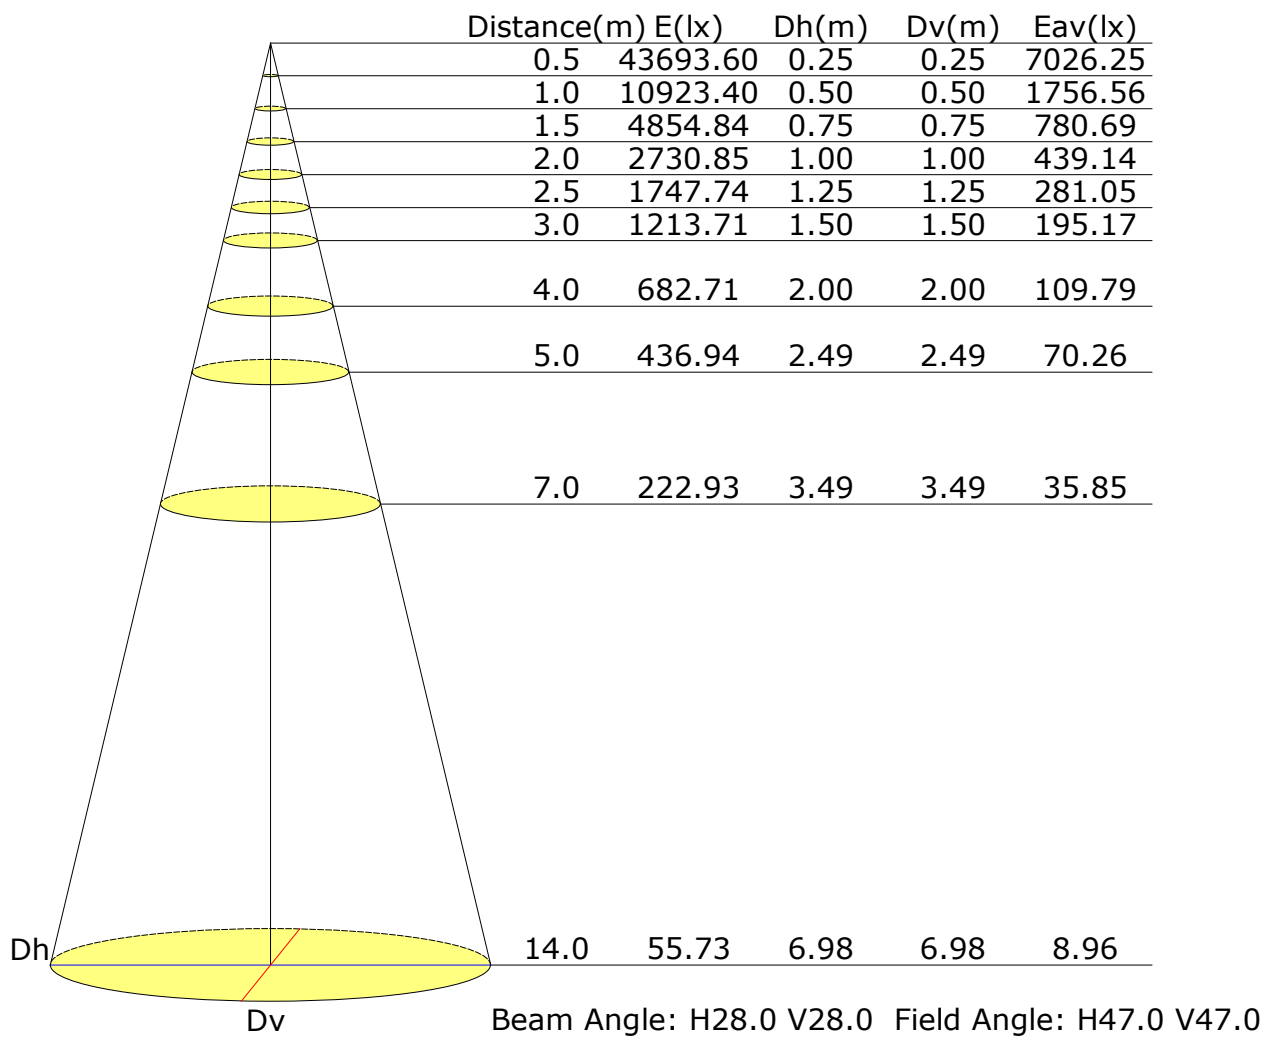

## Vertical IsoLux Plot

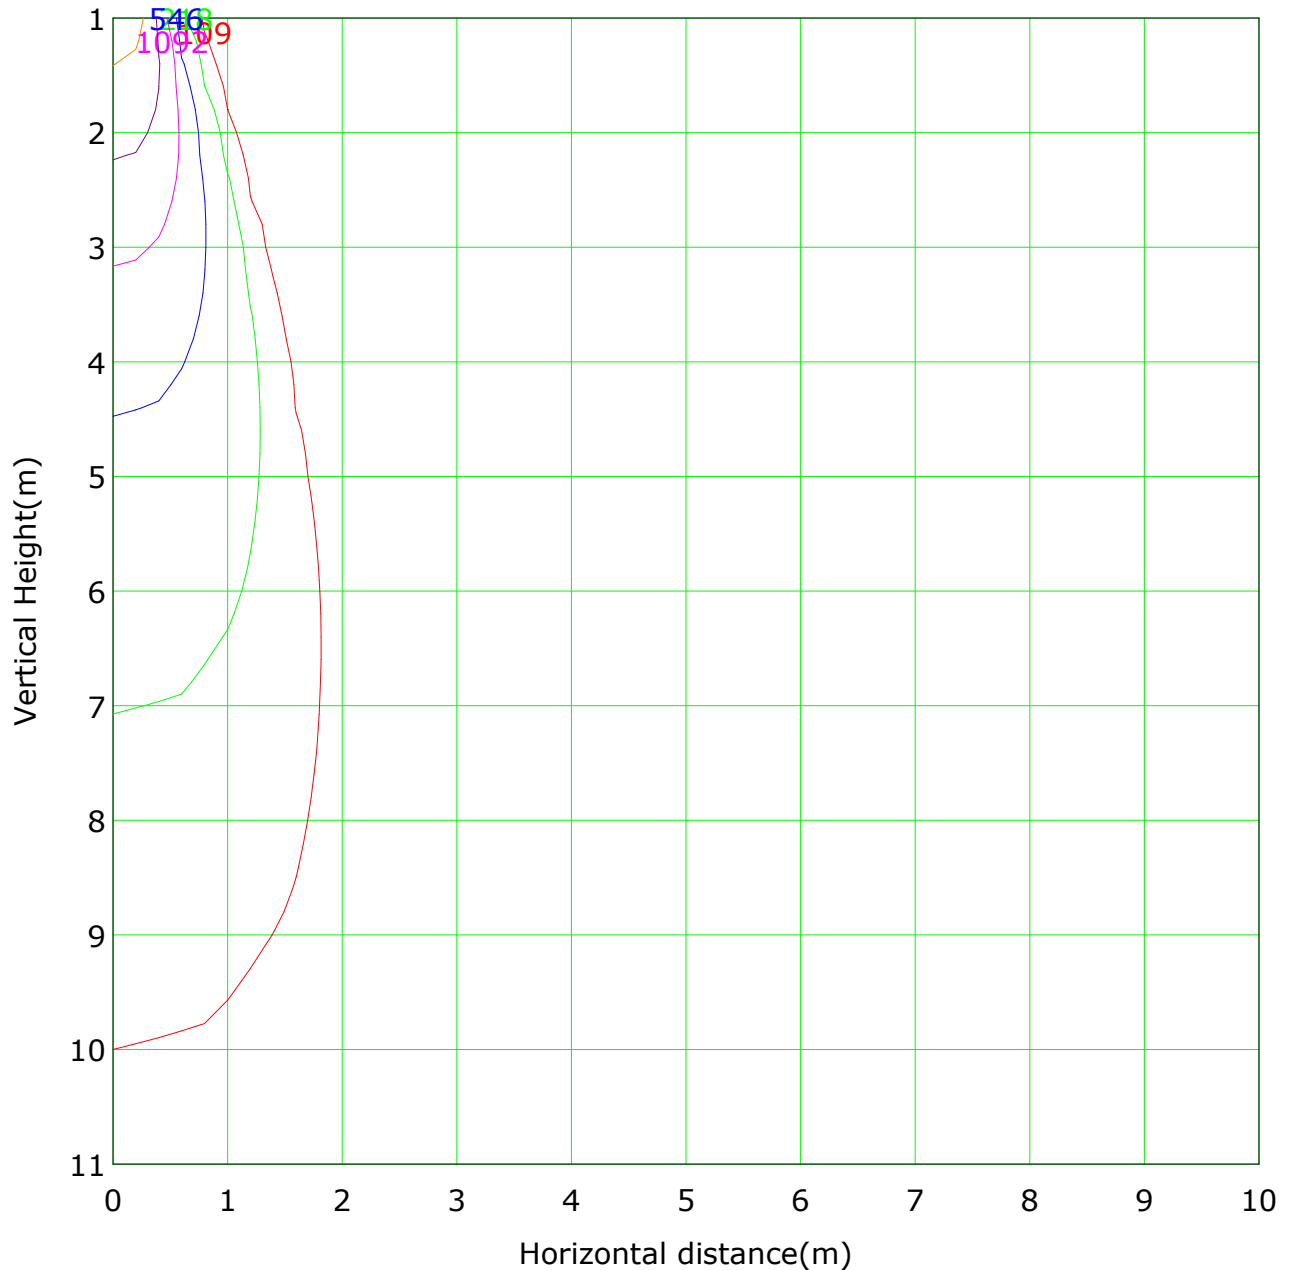


Lowest(m): 1m    Highest(m): 11    Max Lux: 10923  
— ( 1%): 109 lx    — ( 2%): 218 lx  
— ( 5%): 546 lx    — ( 10%): 1092 lx  
— ( 20%): 2185 lx    — ( 50%): 5462 lx  
— (100%): 10923 lx

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

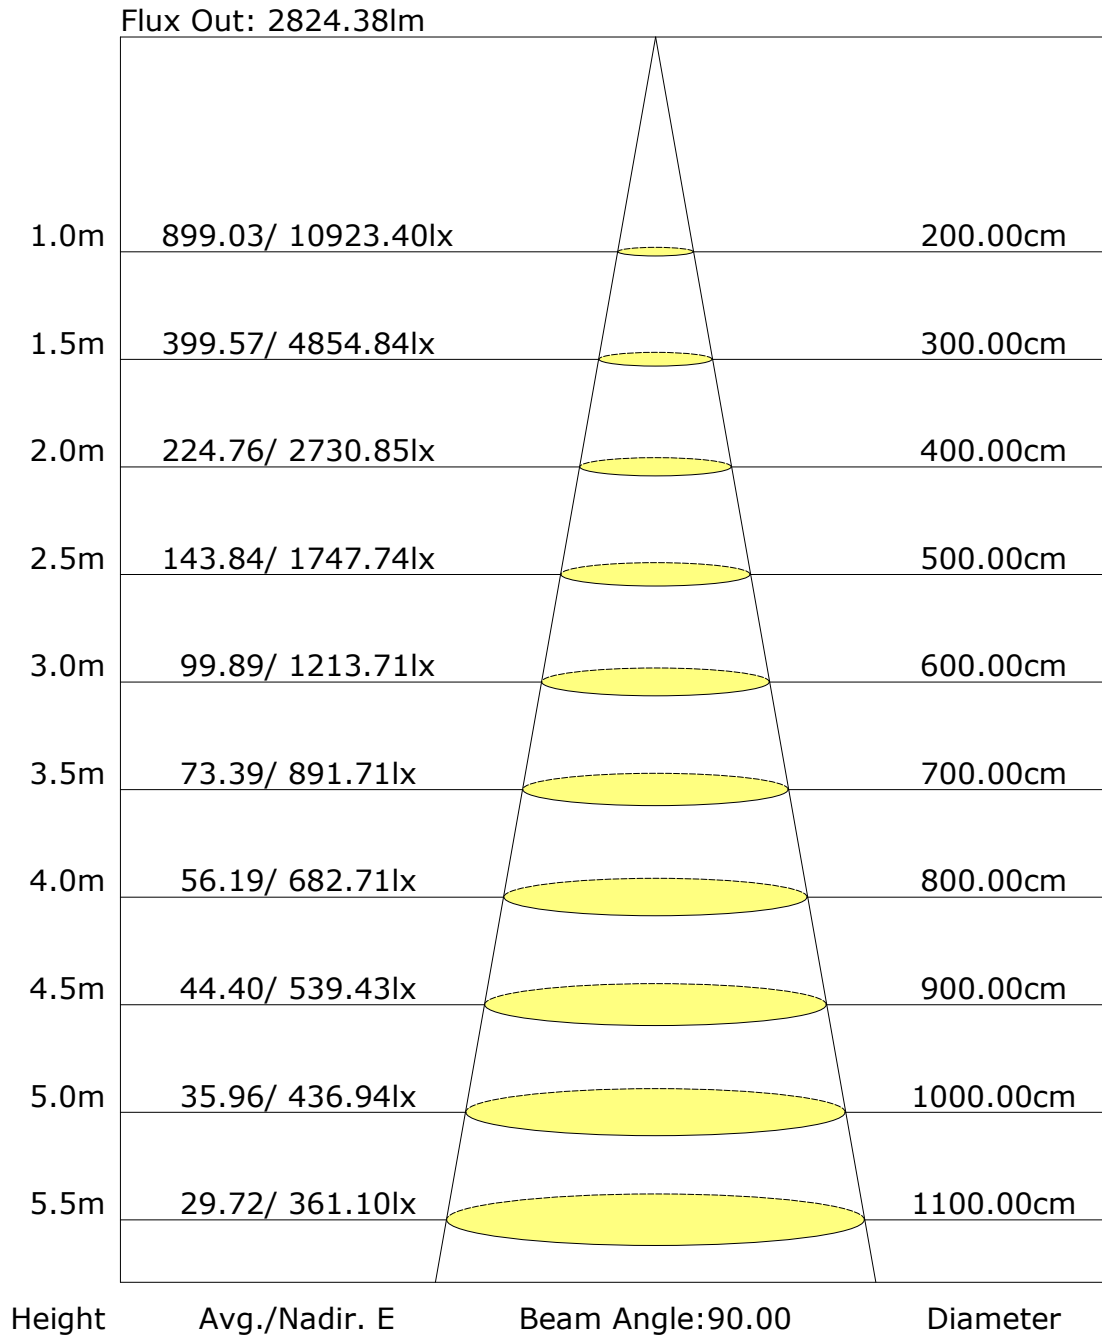

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:



## Unit: cd

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector: