

Report No.: 93.10511 RECO Surface Light Test Time: 2023-10-12 18:26

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 226.1 V

Current: 0.100 A

Power: 19.70 W

Power Factor: 0.874

Photometric Results

CIE Class: Direct

Measurement Flux: 2221.7 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H51.1

Vertical Diffuse Angle(50%): V51.1

Luminaire Efficacy Rating (LER): 113

Max. Intensity: 3197.1 cd

Total Rated Lamp Lumens: 2221.7 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3183.92 cd

Pos of Max. Intensity: H0 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

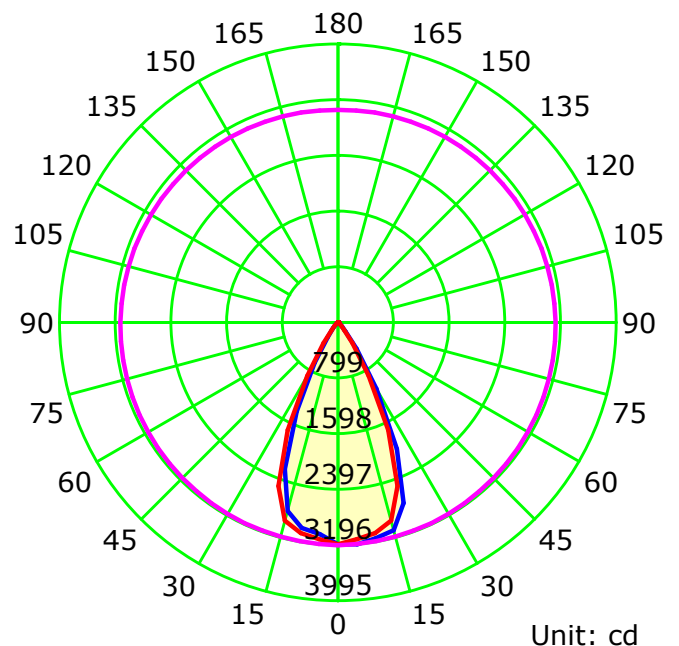

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

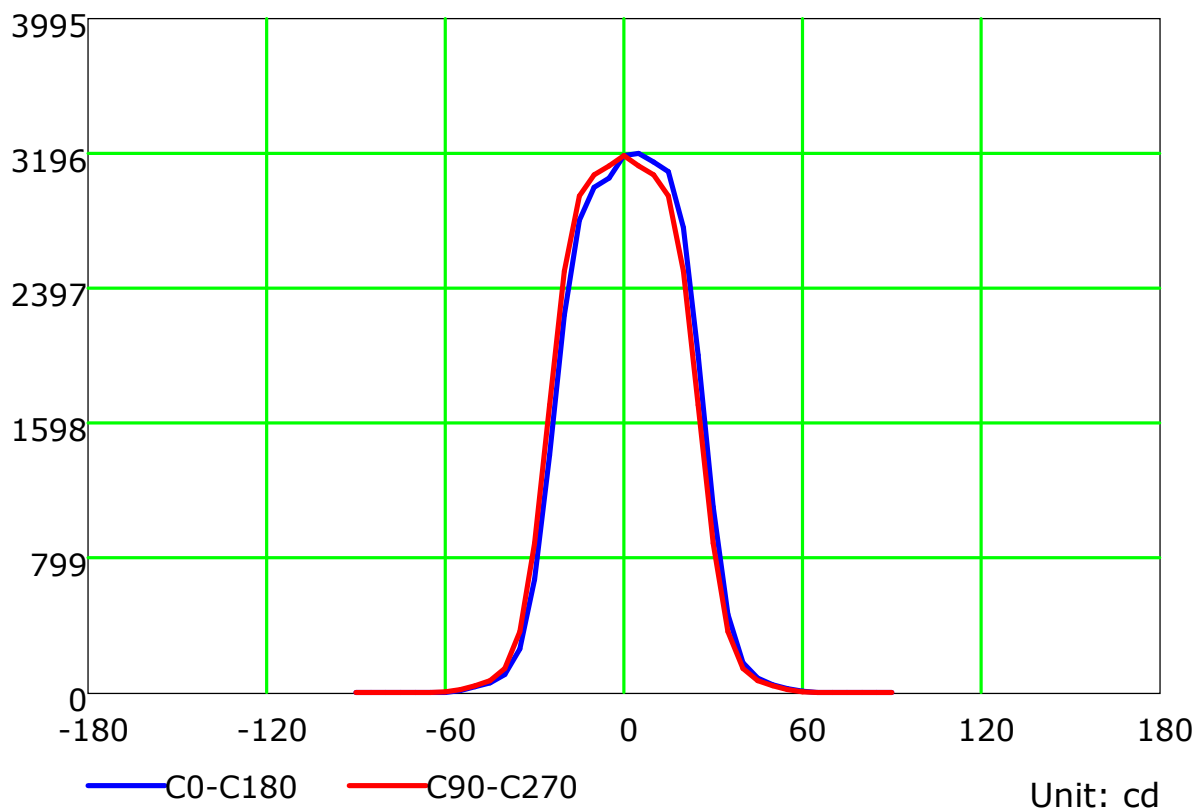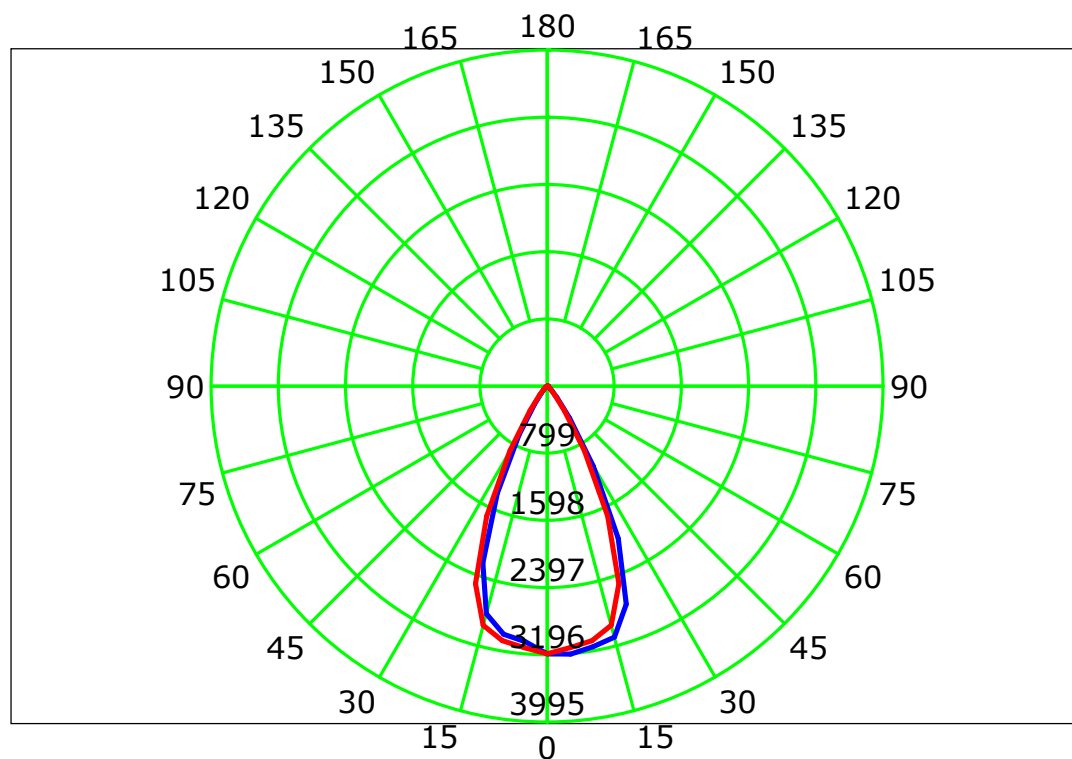

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

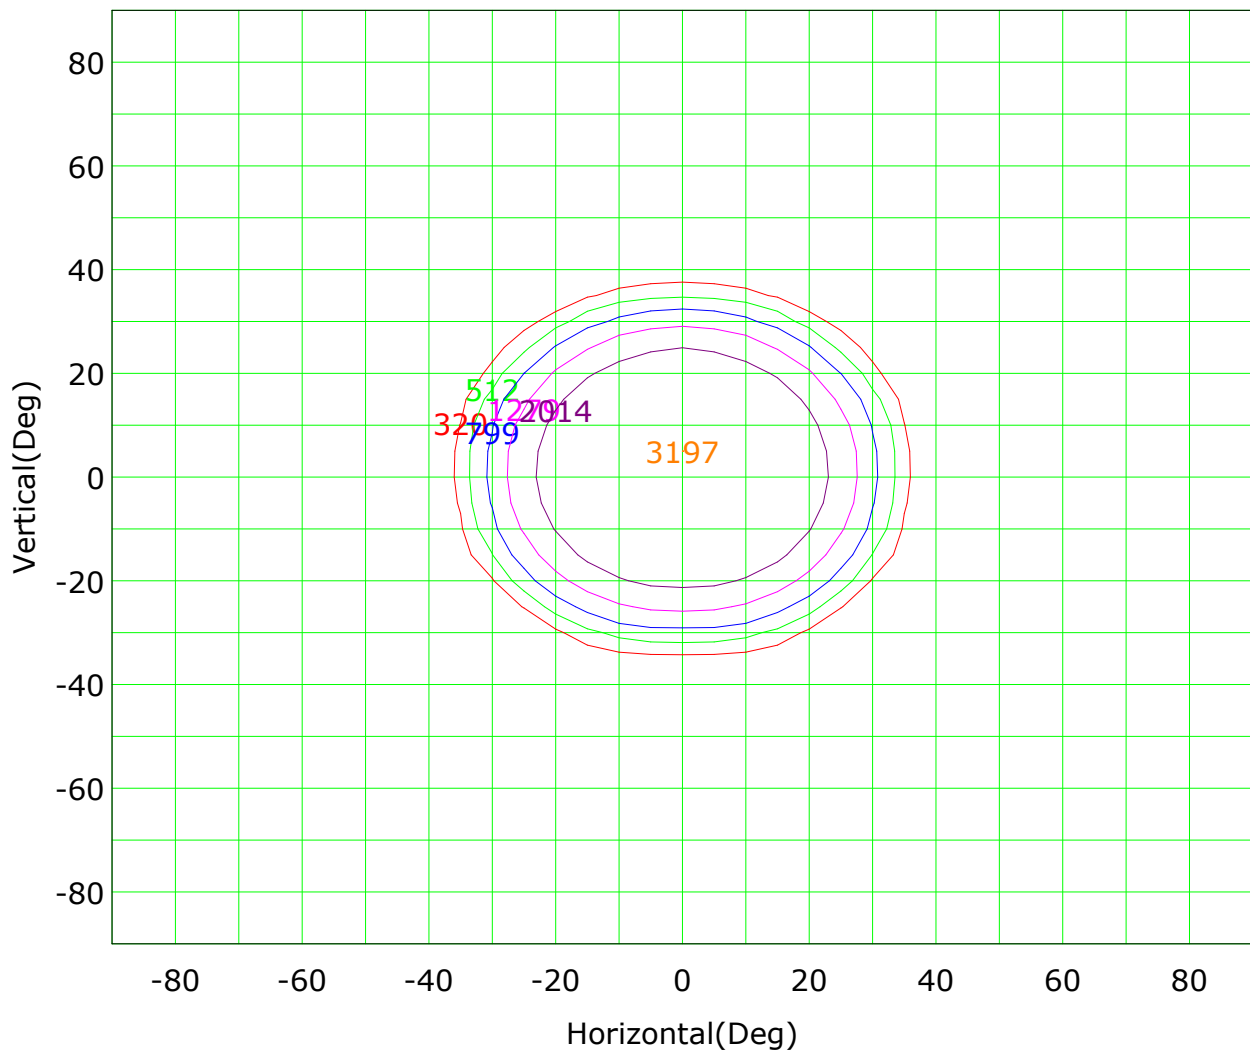

Imax (100%): 3197 cd

(10%): 320 cd	(16%): 512 cd
(25%): 799 cd	(40%): 1279 cd
(63%): 2014 cd	(100%): 3197 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

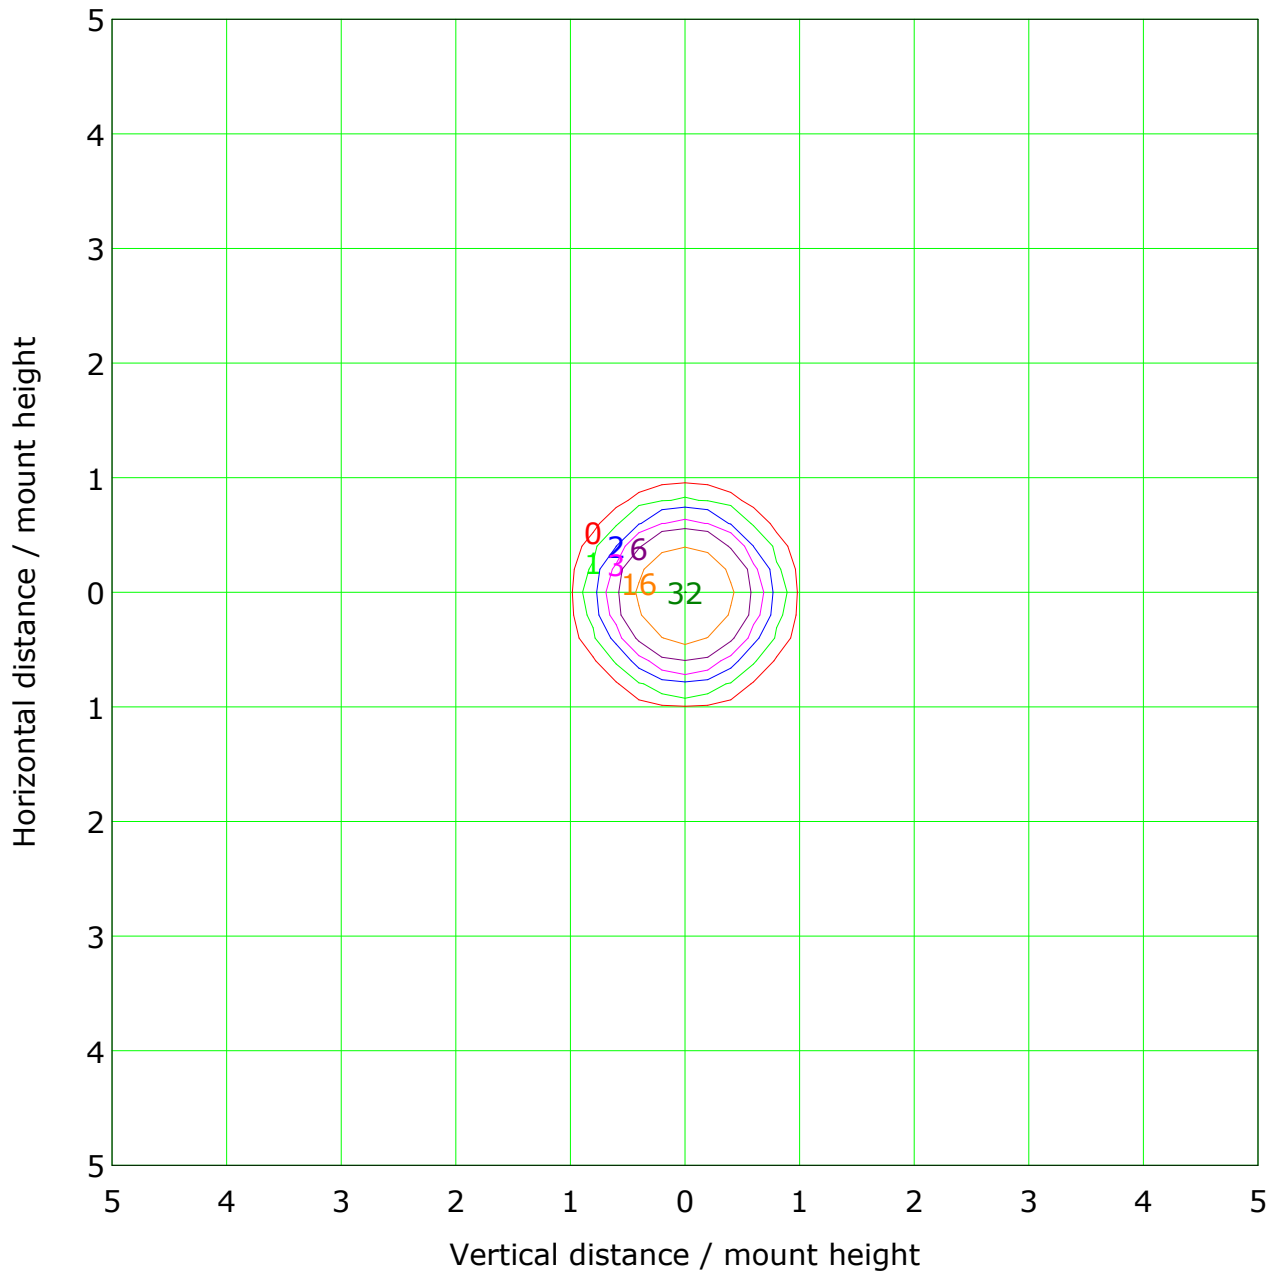


Mounting Height: 10m		Max Lux(100%): 32 lx	
(1%):	0 lx	(2%):	1 lx
(5%):	2 lx	(10%):	3 lx
(20%):	6 lx	(50%):	16 lx
(100%):	32 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

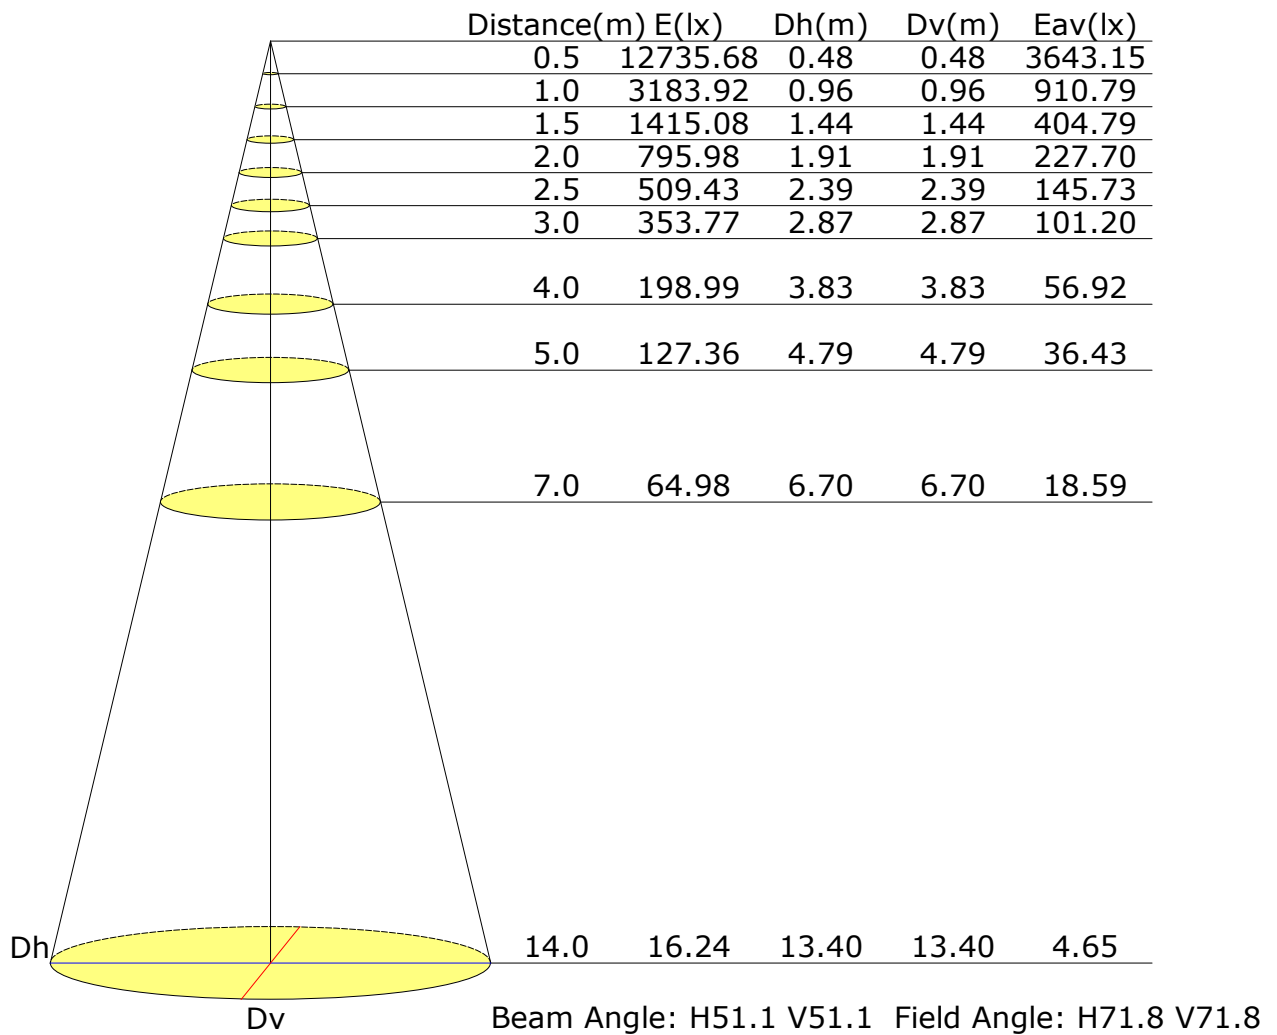

Vertical IsoLux Plot

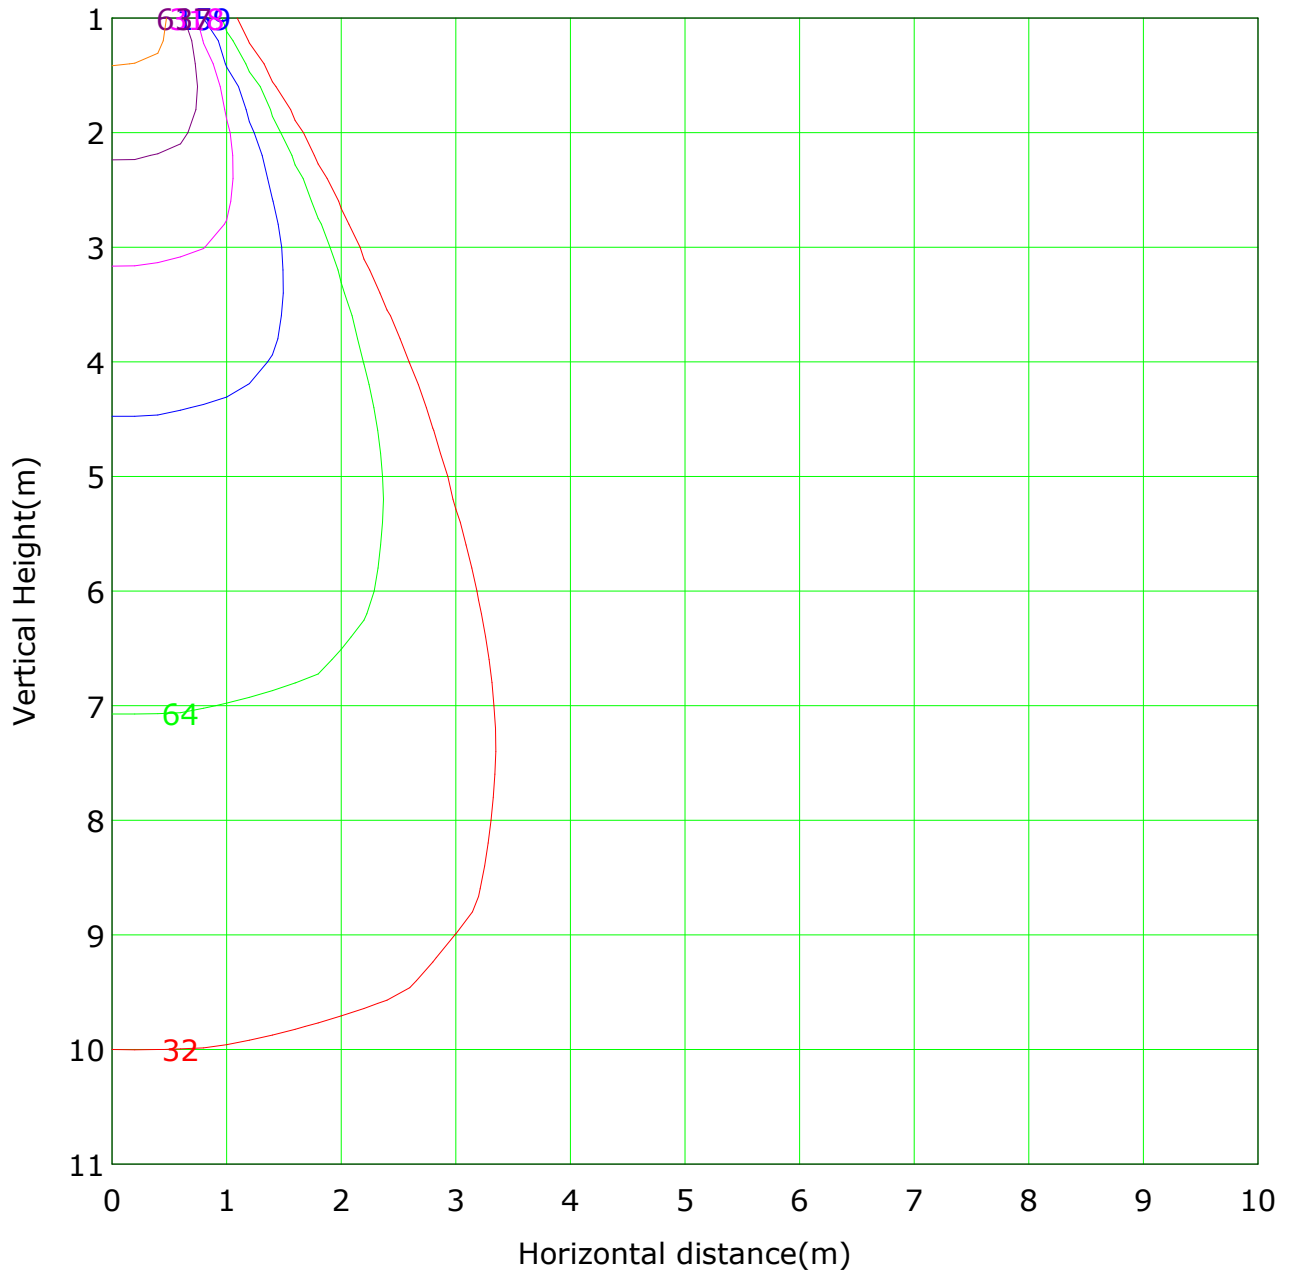


Lowest(m): 1m Highest(m): 11 Max Lux: 3184

(1%): 32 lx	(2%): 64 lx
(5%): 159 lx	(10%): 318 lx
(20%): 637 lx	(50%): 1592 lx
(100%): 3184 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

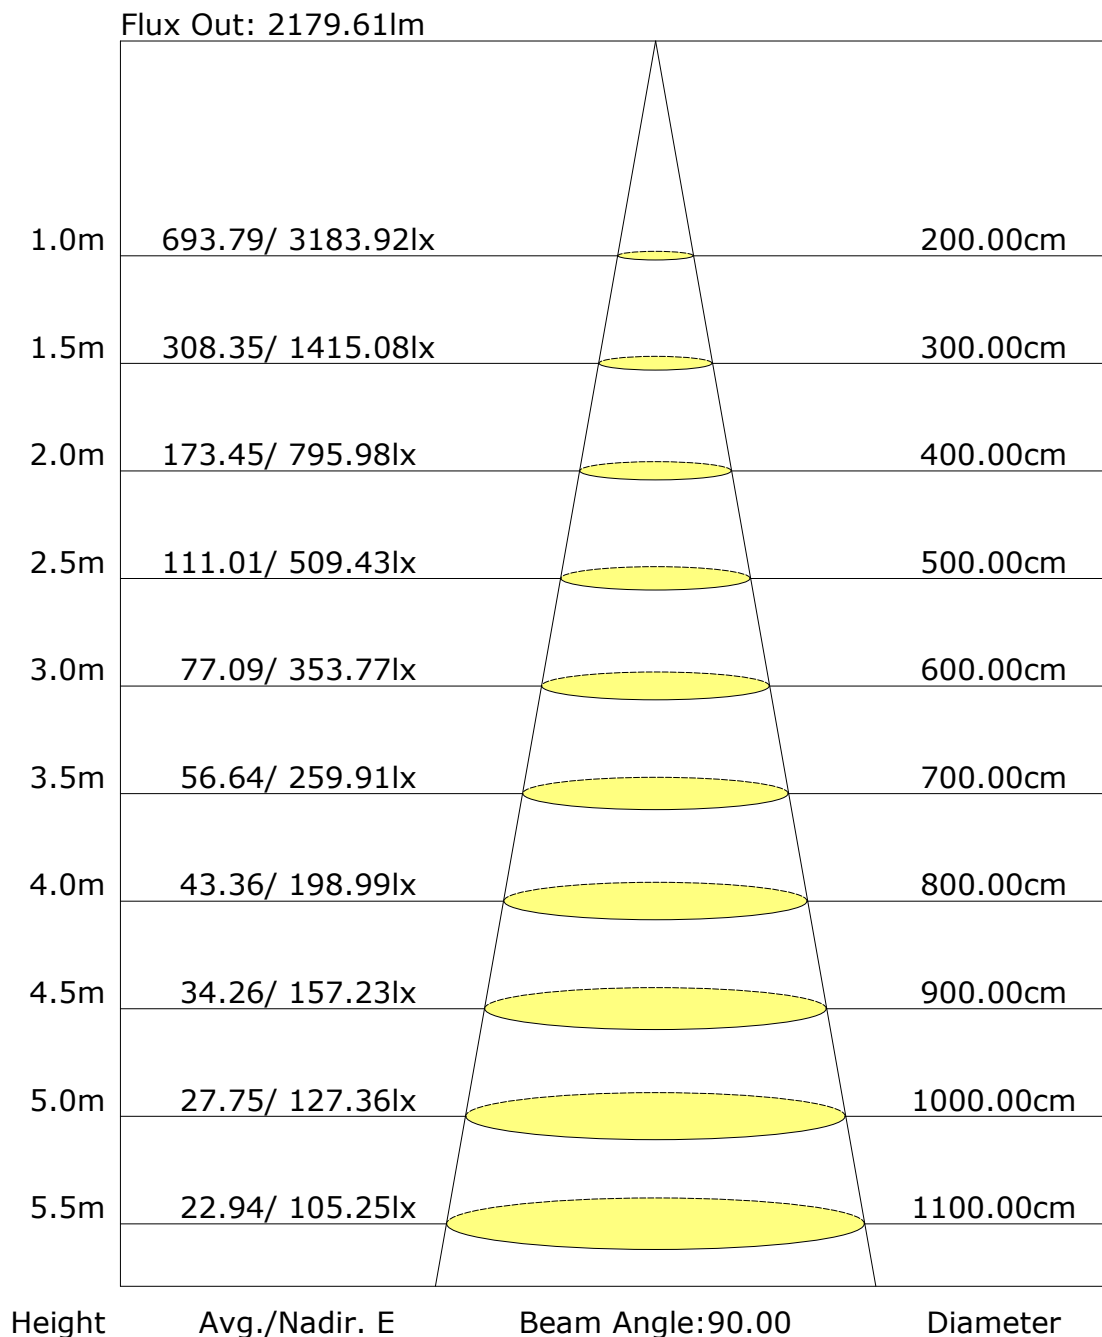

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: