
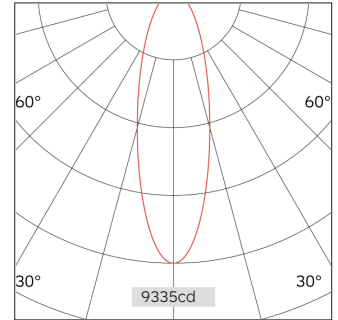
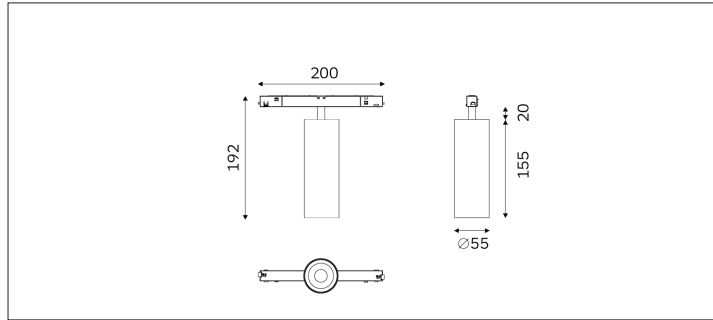


62.05512 FOS Track Lighting



Connected Load	24W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	20D/32D/41D/49D
Track	Low Voltage Track
Light Distribution	FOS Track Lighting
Luminous Flux Of The Luminaire	2677lm
Luminaire Efficacy	111lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		20°
1.0	9335	0.57
2.0	2334	0.14
3.0	1037	1.71
4.0	583	2.28
5.0	373	2.85

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.