
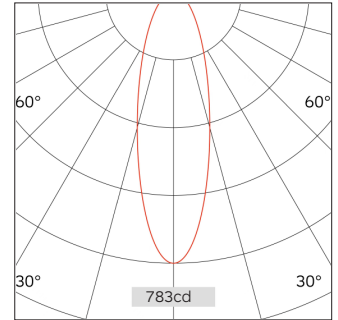
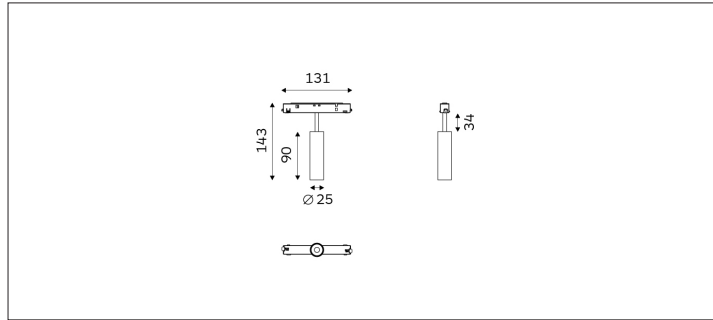


# 62.02512 FOS Track Lighting



Connected Load	7W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	18D/24D/40D/55D
Track	Low Voltage Track
Light Distribution	FOS Track Lighting
Luminous Flux Of The Luminaire	357lm
Luminaire Efficacy	52lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	Input 48V

H(M)	E(lx)	D(M)
		40°
1.0	783.35	0.73
2.0	195.84	1.45
3.0	87.04	2.18
4.0	48.96	2.91
5.0	31.33	3.64

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.