
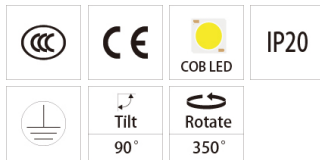
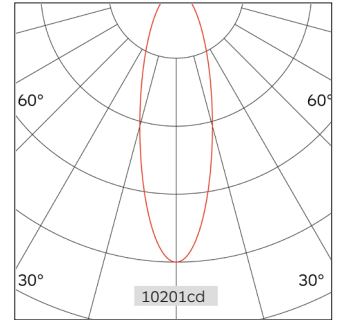


# 32.05525 FOS Track Lighting

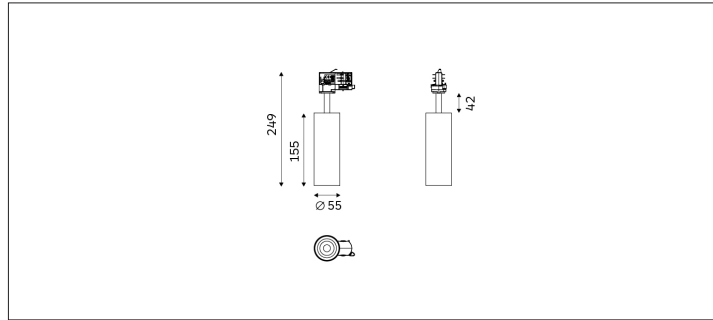

Light Distribution	FOS Track Lighting
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	20D/32D/41D/49D
Track Phases	1 Circuit/ 3 Circuit
Connected Load	16W
Luminous Flux Of The Luminaire	1871lm
Luminaire Efficacy	117lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(M)	E(lx)	D(M)
		20°
1.0	10201	0.36
2.0	2550	0.72
3.0	1133	1.08
4.0	637	1.45
5.0	408	1.81

Application areas: retail, museums, hospitality, residential, offices and lobbies.