




# 32.08012 ECO Track Lighting Intrack

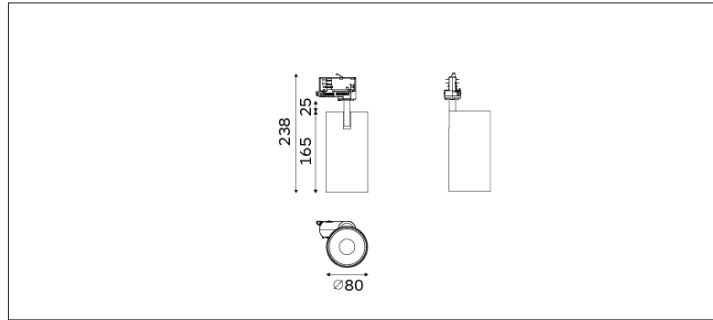

Light Distribution	ECO Track Lighting Intrack
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	18D/26D/33D/55D
Track Phases	1 Circuit/ 3 Circuit
Connected Load	31W
Luminous Flux Of The Luminaire	3843lm
Luminaire Efficacy	122lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.75Kg
Technical Region	220-240V 50/60Hz

## Light Beam Talbe

h(m)	E(lx)	D(m)
		18°
1.0	27069.92	0.33
2.0	6767.48	0.66
3.0	3007.77	0.98
4.0	1691.87	1.31
5.0	1082.80	1.64

Application areas: retail, museums, hospitality, residential, offices and lobbies.