


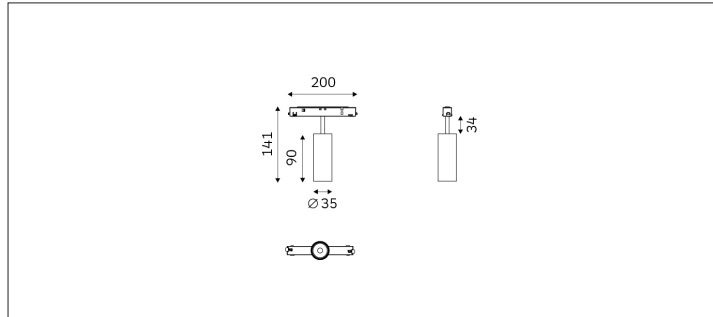


# 62.03513 FOS Track Lighting



|                                |                          |
|--------------------------------|--------------------------|
| Connected Load                 | 9W                       |
| Colour Temperature             | 2700/3000/3500/4000K     |
| Colour Rendition Index         | CRI 90                   |
| Optics                         | LENS                     |
| Beam Angle                     | 15D/24D/37D/50D          |
| Track                          | Low Voltage Track        |
| Light Distribution             | FOS Track Lighting       |
| Luminous Flux Of The Luminaire | 588lm                    |
| Luminaire Efficacy             | 65lm/W                   |
| Colour Deviation               | SDCM < 5                 |
| Light Source                   | LED                      |
| LED Type                       | COB                      |
| Dimming Method                 | 1-10V/ Dali              |
| Cover Material                 | Aluminum                 |
| Body Material                  | Aluminum                 |
| IP Rating                      | IP20                     |
| Housing Colour                 | Sandy White/ Sandy Black |
| Weight                         | 0.35Kg                   |
| Technical Region               | Input 48V                |

| H(M) | E(lx)   | D(M) |
|------|---------|------|
|      |         | 24°  |
| 1.0  | 3085.66 | 0.42 |
| 2.0  | 771.41  | 0.84 |
| 3.0  | 342.85  | 1.25 |
| 4.0  | 192.85  | 1.67 |
| 5.0  | 123.43  | 2.09 |

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.