



## 52.05522 LOTT RECESSED DOWNLIGHT

**Technical Region** 



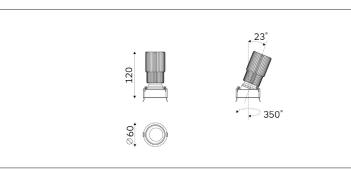





350°



| Light Distribution             | LOTT Recessed Downlight  |  |
|--------------------------------|--------------------------|--|
| Colour Temperature             | 2700/3000/3500/4000K     |  |
| Colour Rendition Index         | CRI 90                   |  |
| Optics                         | LENS                     |  |
| Beam Angle                     | 20D/25D/37D/50D          |  |
| Cut out                        | 55mm                     |  |
| Connected Load                 | 14.9W                    |  |
| Luminous Flux Of The Luminaire | 1078lm                   |  |
| Luminaire Efficacy             | 72lm/W                   |  |
| Colour Deviation               | SDCM<5                   |  |
| Light Source                   | LED                      |  |
| LED Type                       | СОВ                      |  |
| Dimming Method                 | Triac/1-10V/ Dali        |  |
| Cover Material                 | Aluminum                 |  |
| Body Material                  | Aluminum                 |  |
| IP Rating                      | IP20                     |  |
| Housing Colour                 | Sandy White/ Sandy Black |  |
| Weight                         | 0.5Kg                    |  |
|                                |                          |  |

220-240V 50/60Hz

| 5    |         |      |
|------|---------|------|
| H(M) | E(lx)   | D(M) |
|      |         | 25   |
| 1.0  | 5074.22 | 0.45 |
| 2.0  | 1268.56 | 0.89 |
| 3.0  | 563.80  | 1.34 |
| 4.0  | 317.14  | 1.79 |
| 5.0  | 202.97  | 2.24 |

2.24

Extremely small size does high wattage to meet the demand for small cut out and high lumens nowadays. Deep anti-glare optical structure, let the space more comfortable.