



# 52.10022 SLIM DRECESSED DOWNLIGHT

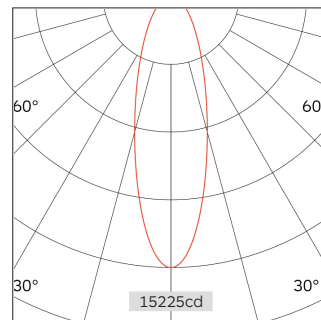

IP20

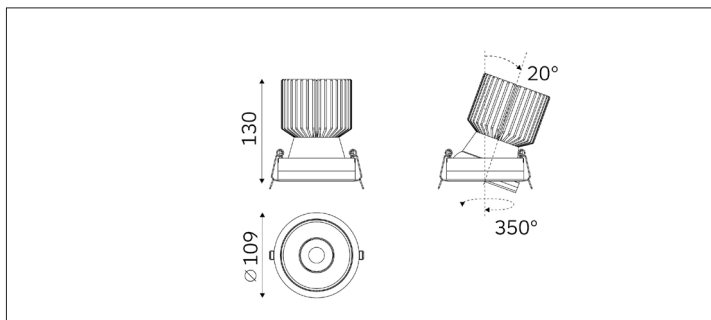

Light Distribution	Slim Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	26D/33D/42D/51D
Cut out	100mm
Connected Load	36.5W
Luminous Flux Of The Luminaire	4252lm
Luminaire Efficacy	116lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	1Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(M)	E(lx)	D(M)
		26°
1.0	15225	0.47
2.0	3806	0.93
3.0	2436	1.40
4.0	951	1.87
5.0	609	2.34

Small sizes but can be high power.  
Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, can almost meet all the requirements. With anti-glare reflector, created a comfortable environment.