

Report No.: 93.04520 Suspension Light

Test Time: 2023-09-07 10:54

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 218.2 V

Current: 0.117 A

Power: 14.50 W

Power Factor: 0.560

Photometric Results

CIE Class: Direct

Measurement Flux: 1076.9 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H42.7

Vertical Diffuse Angle(50%): V42.7

Luminaire Efficacy Rating (LER): 74

Max. Intensity: 1939.45 cd

Total Rated Lamp Lumens: 1076.9 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1726.39 cd

Pos of Max. Intensity: H0 V10

Picture Of Luminaire



Luminous Intensity Distribution Curve

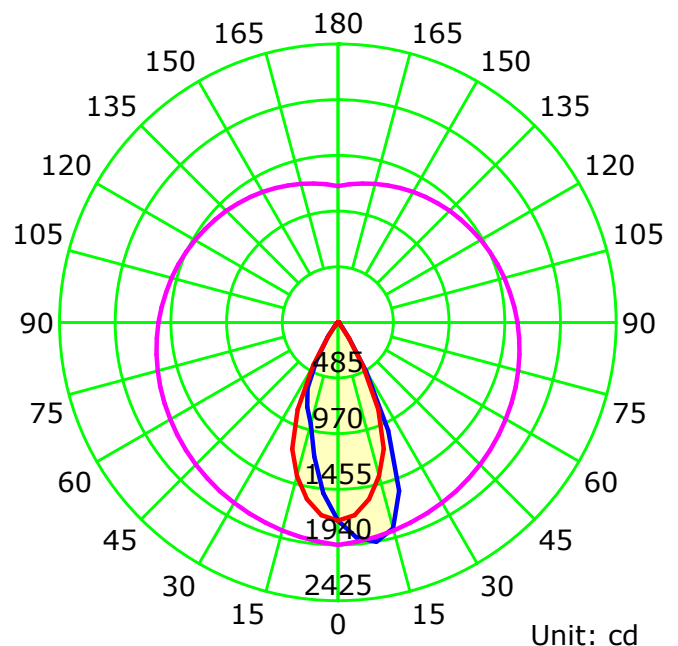

— C0-C180 — C90-C270 — G10

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

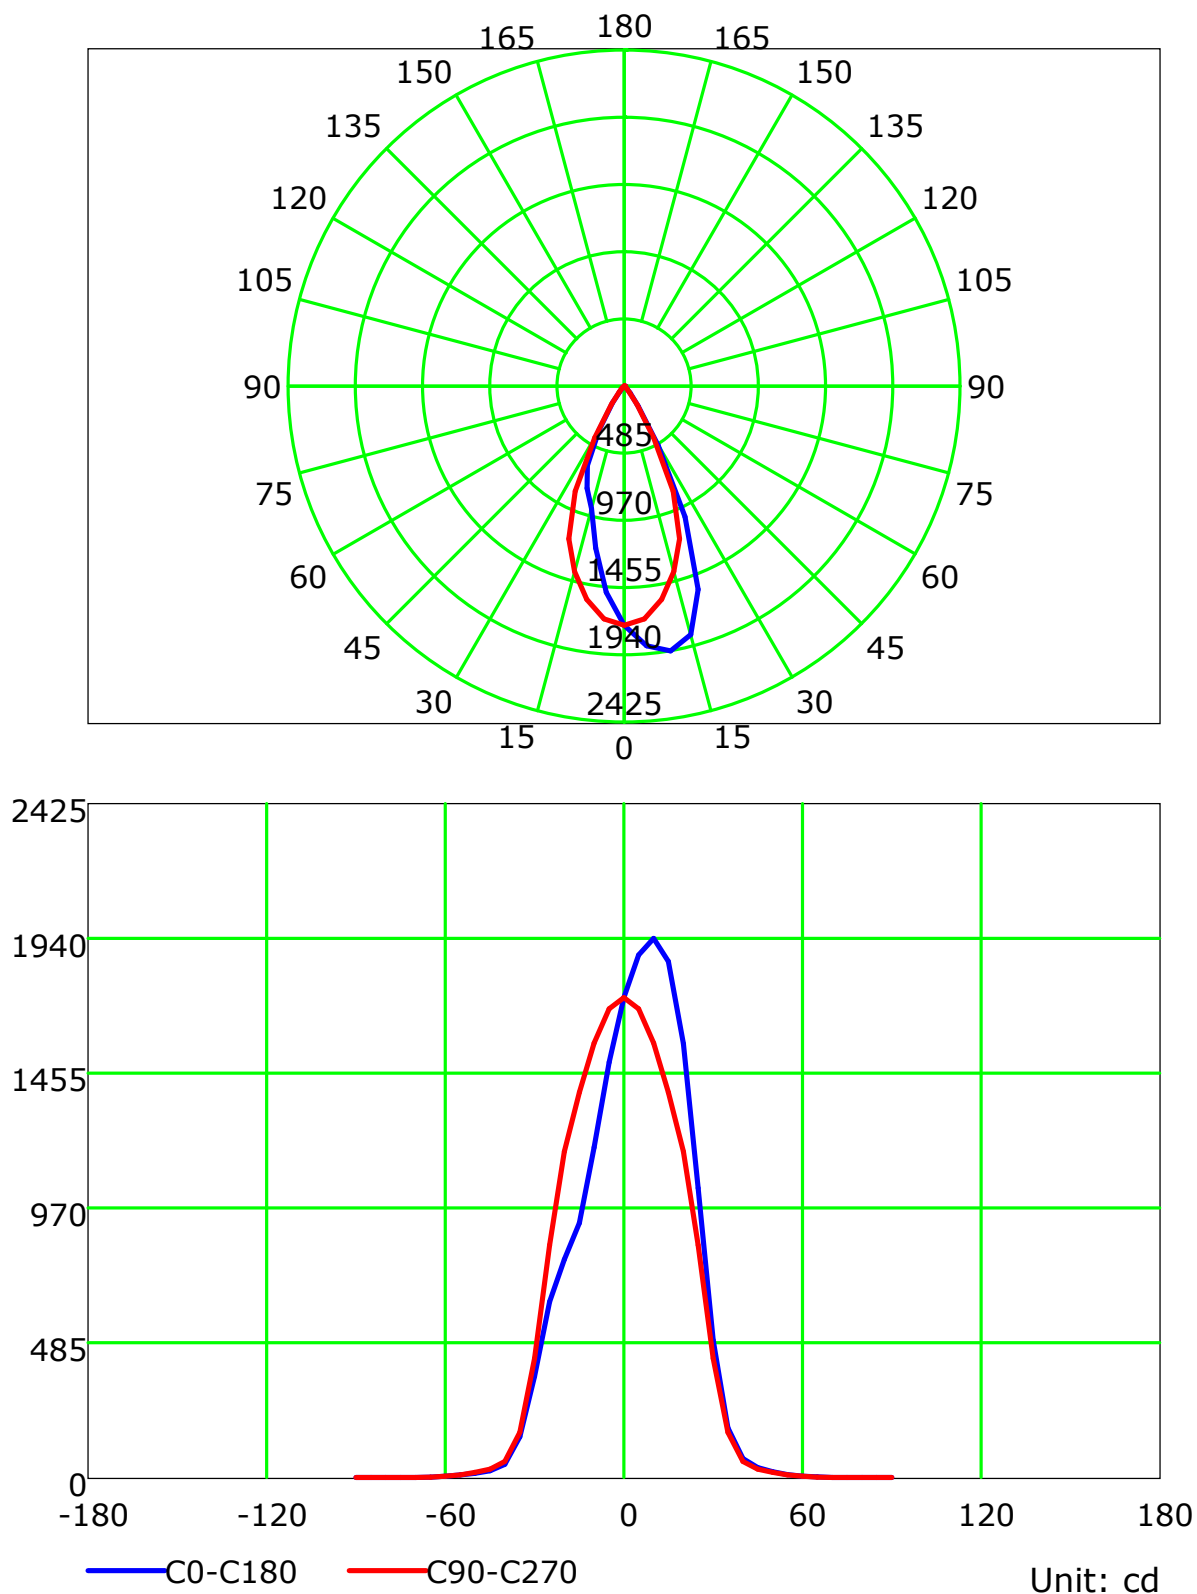

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

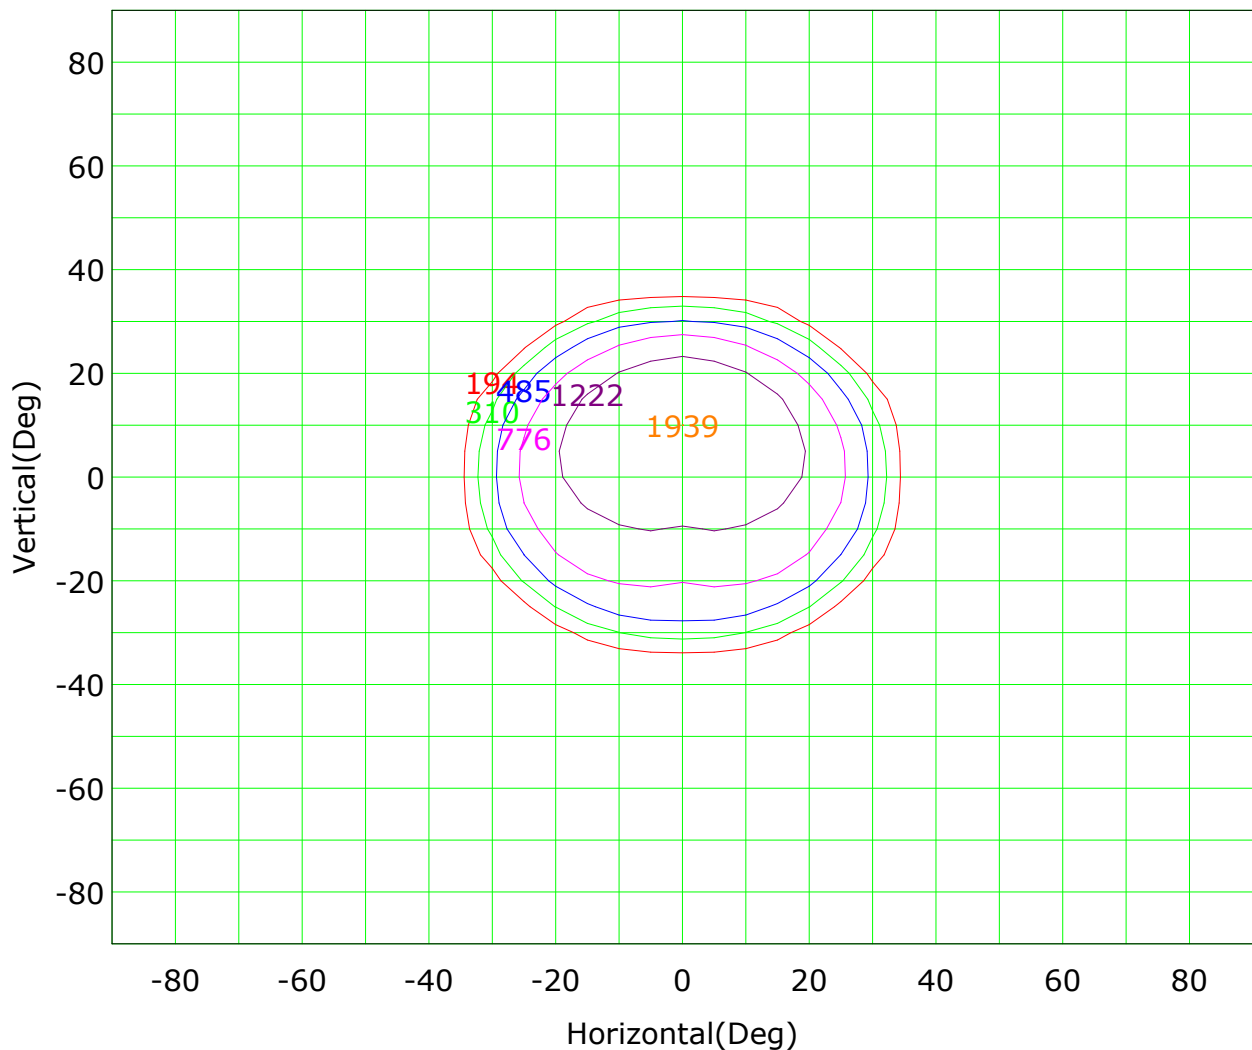

Imax (100%): 1939 cd

(10%): 194 cd	(16%): 310 cd
(25%): 485 cd	(40%): 776 cd
(63%): 1222 cd	(100%): 1939 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

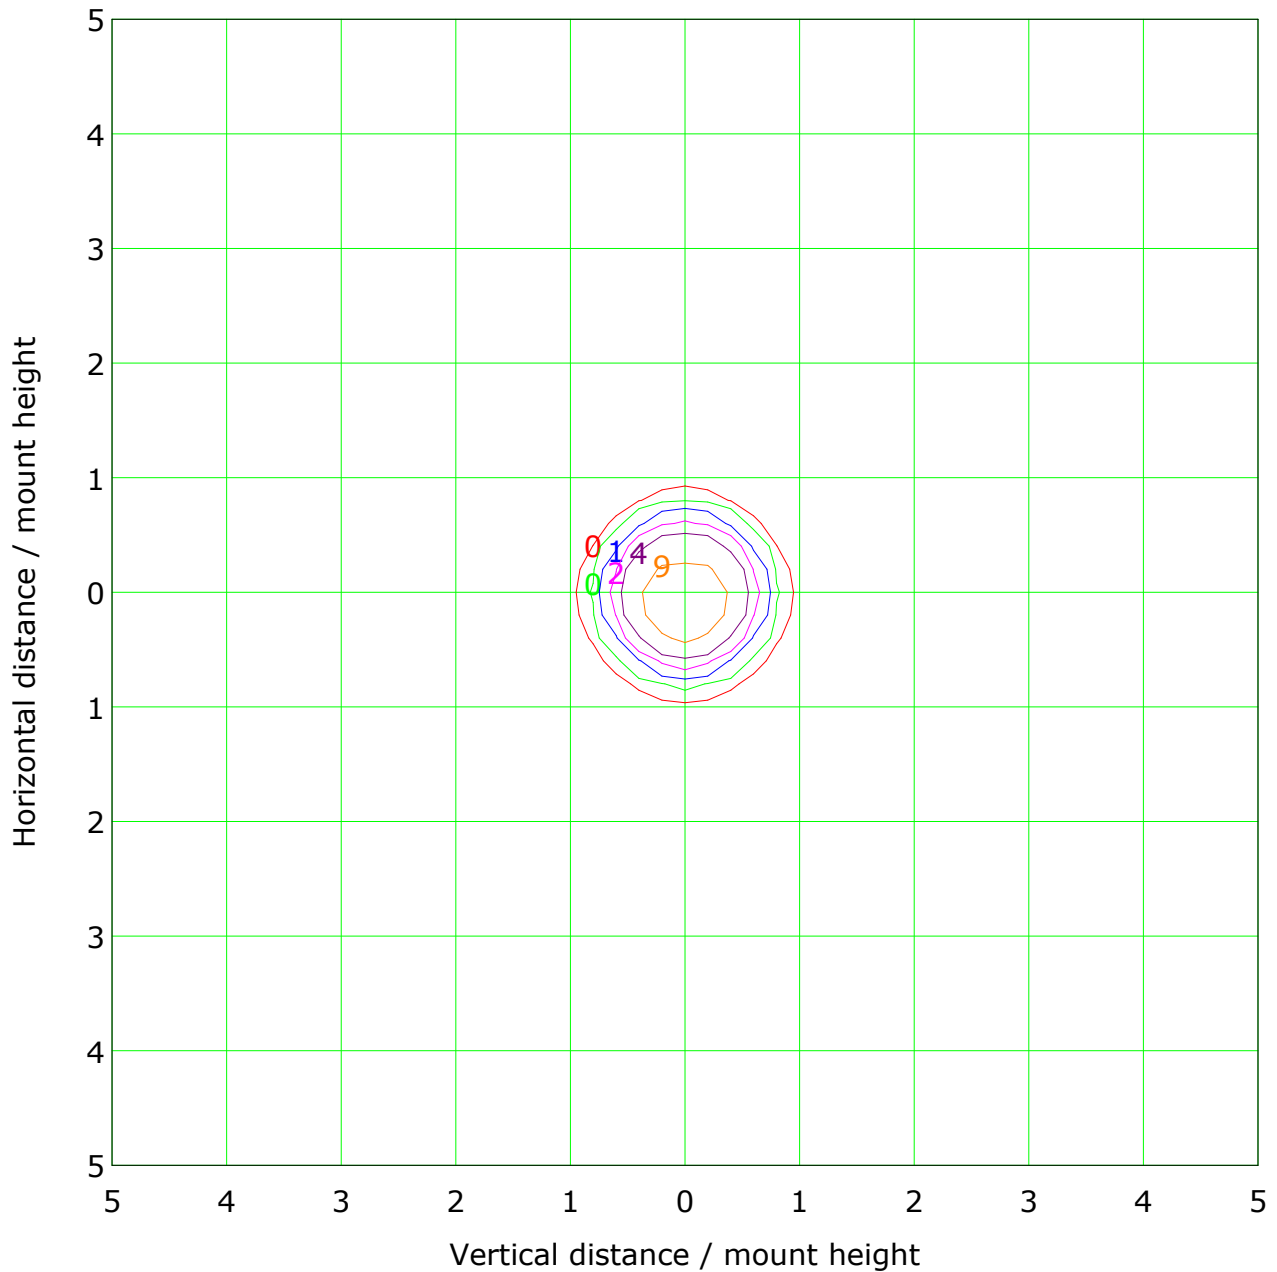


Mounting Height: 10m Max Lux(100%): 19 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	1 lx	— (10%):	2 lx
— (20%):	4 lx	— (50%):	9 lx
— (100%):	19 lx		

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

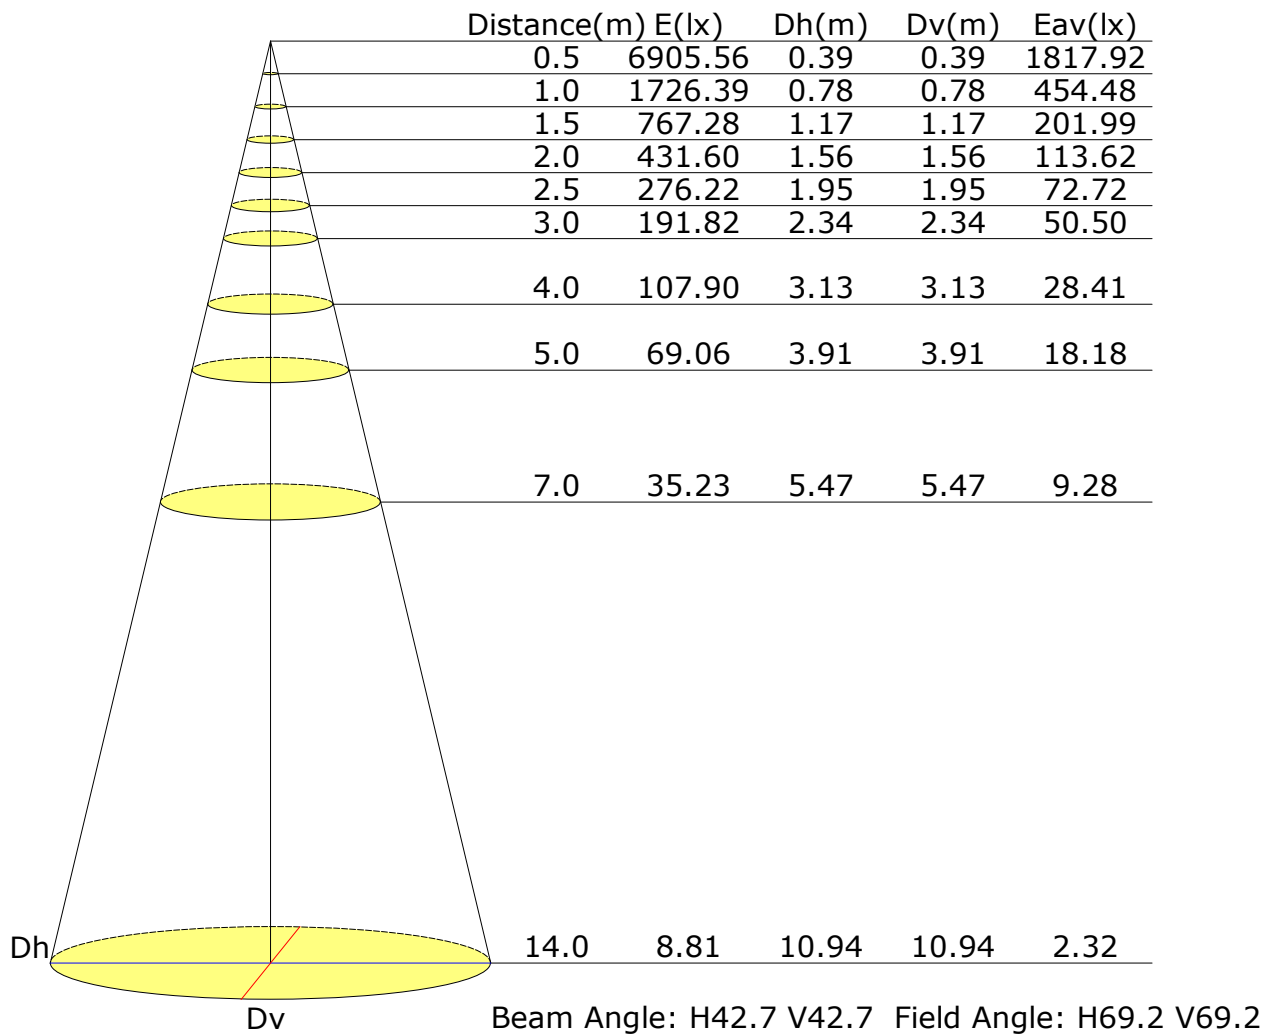

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Vertical IsoLux Plot

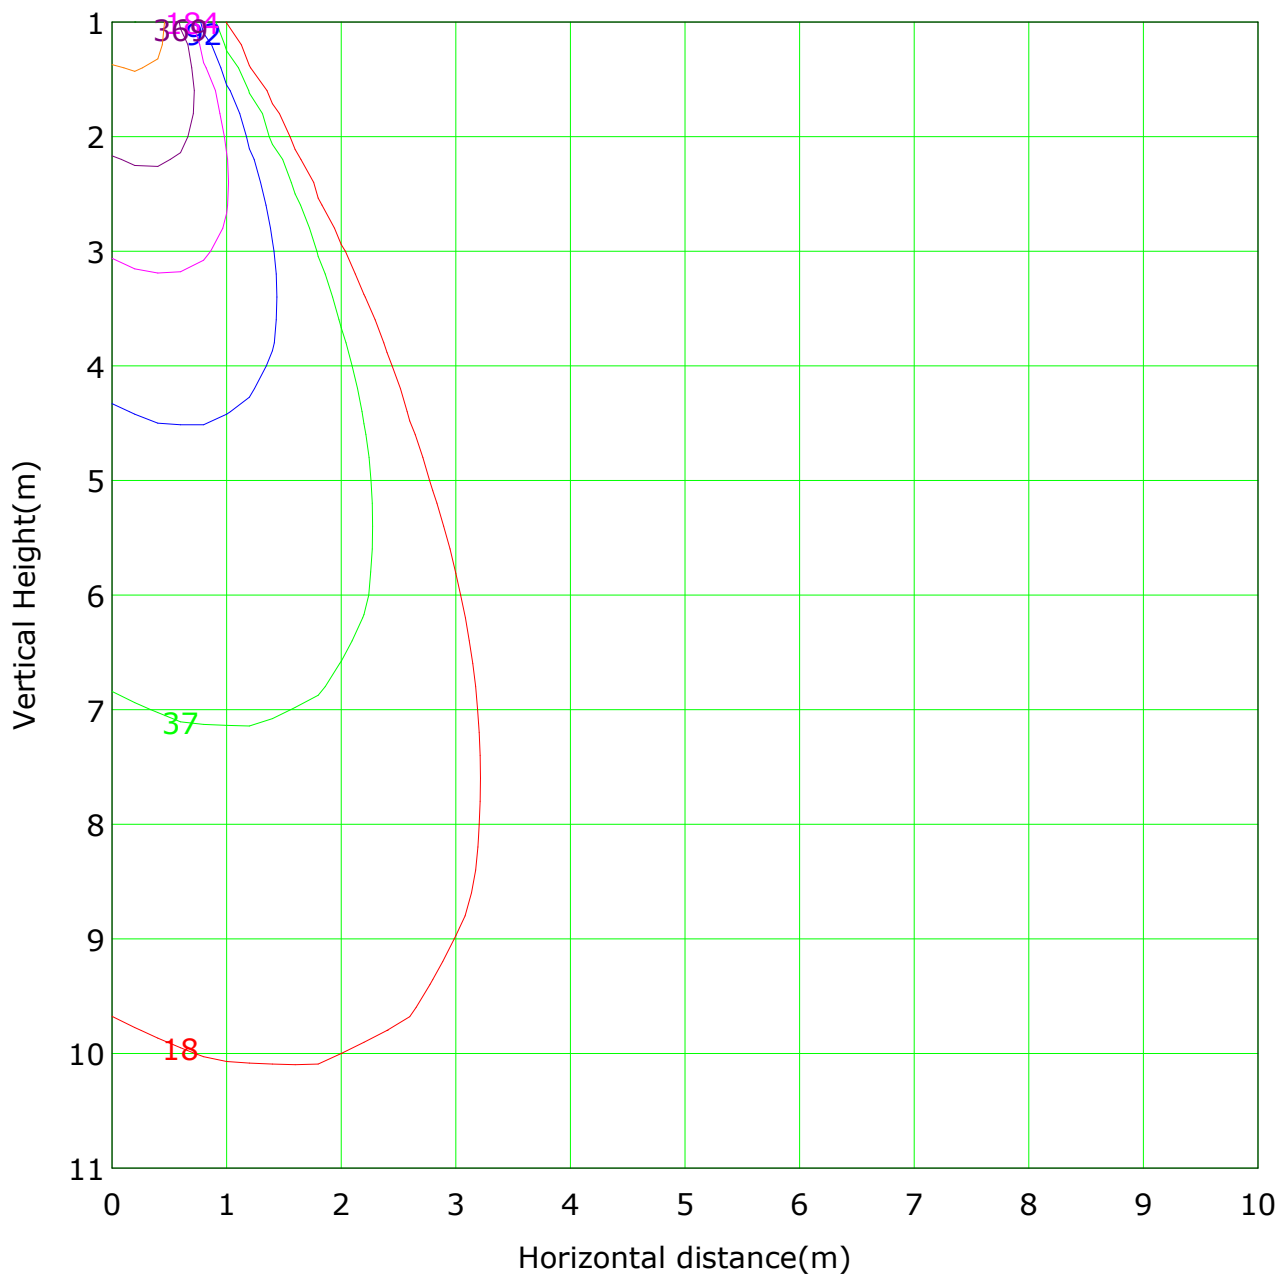


Lowest(m): 1m Highest(m): 11 Max Lux: 1844	
(1%): 18 lx	(2%): 37 lx
(5%): 92 lx	(10%): 184 lx
(20%): 369 lx	(50%): 922 lx
(100%): 1844 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

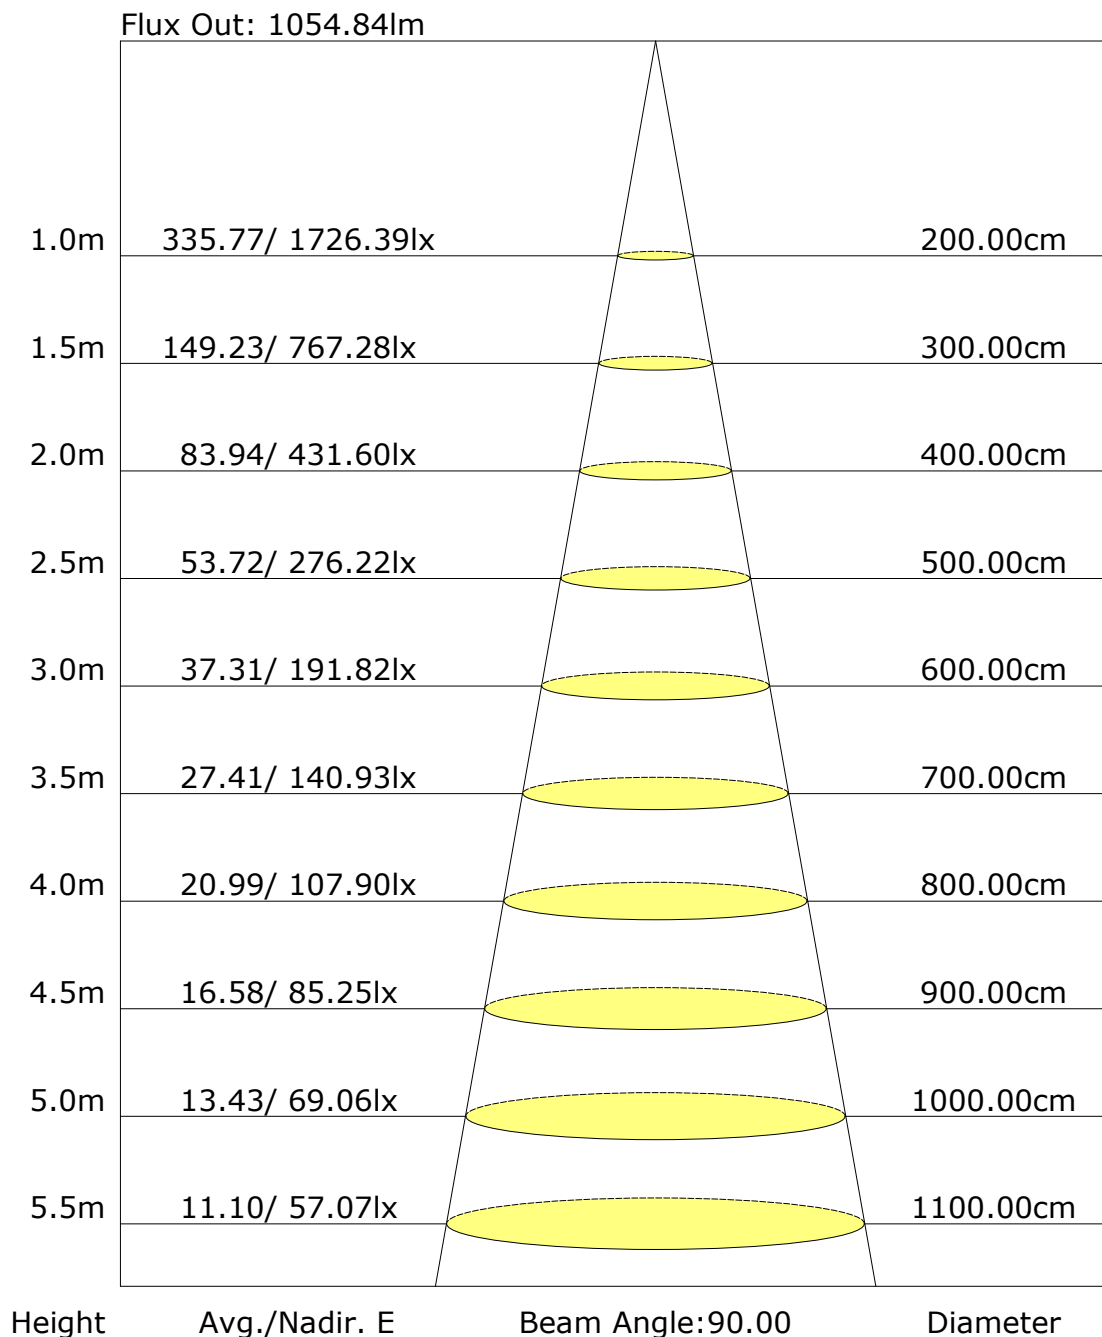

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: