

Report No.: 93.08012 SRA Surface Mounted Test Time: 2023-10-12 18:57

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 224.4 V

Current: 0.068 A

Power: 8.50 W

Power Factor: 0.552

Photometric Results

CIE Class: Direct

Measurement Flux: 646.8 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H24.2

Vertical Diffuse Angle(50%): V24.2

Luminaire Efficacy Rating (LER): 76

Max. Intensity: 3314.61 cd

Total Rated Lamp Lumens: 646.8 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 3314.6 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

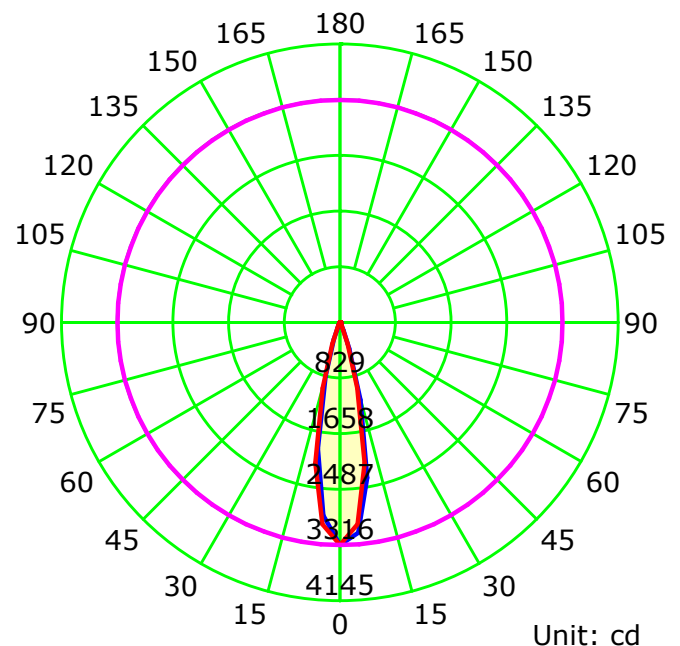

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

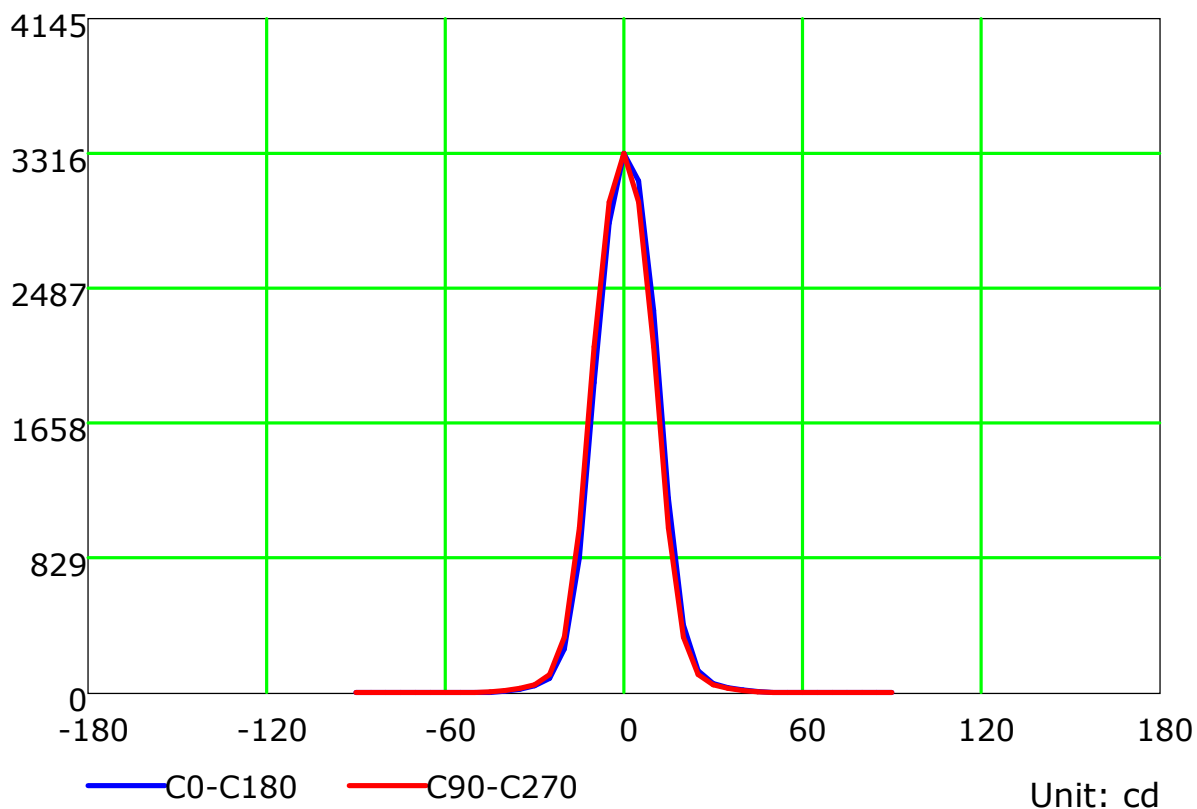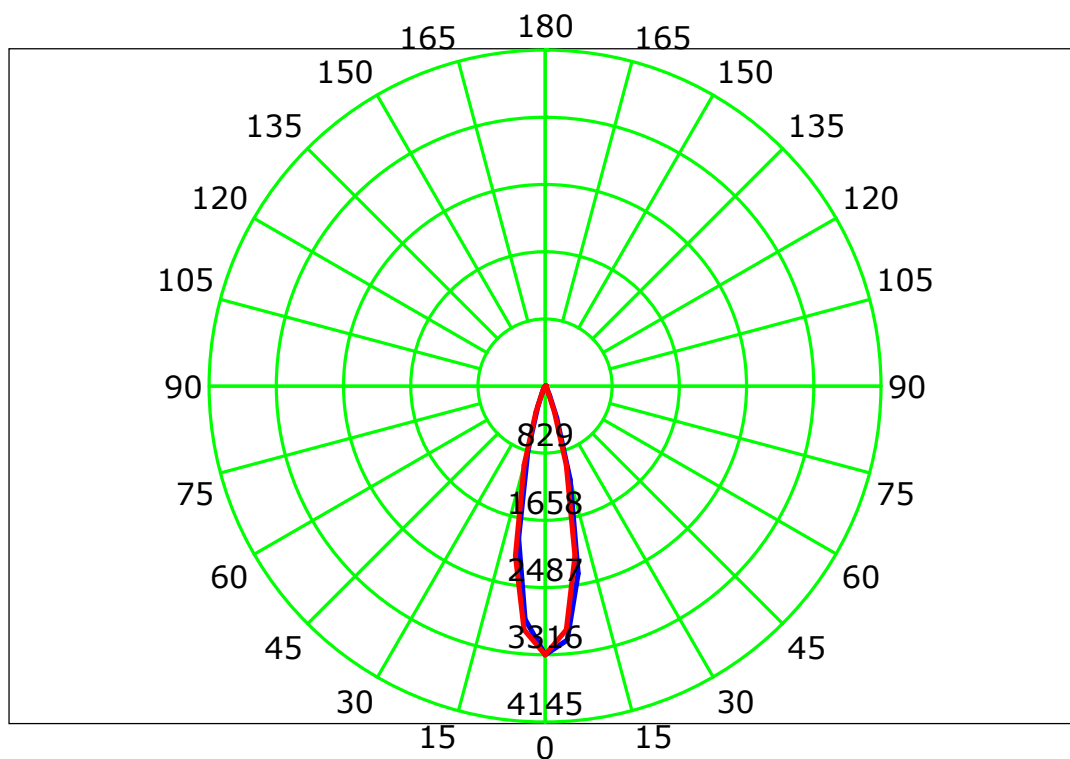

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

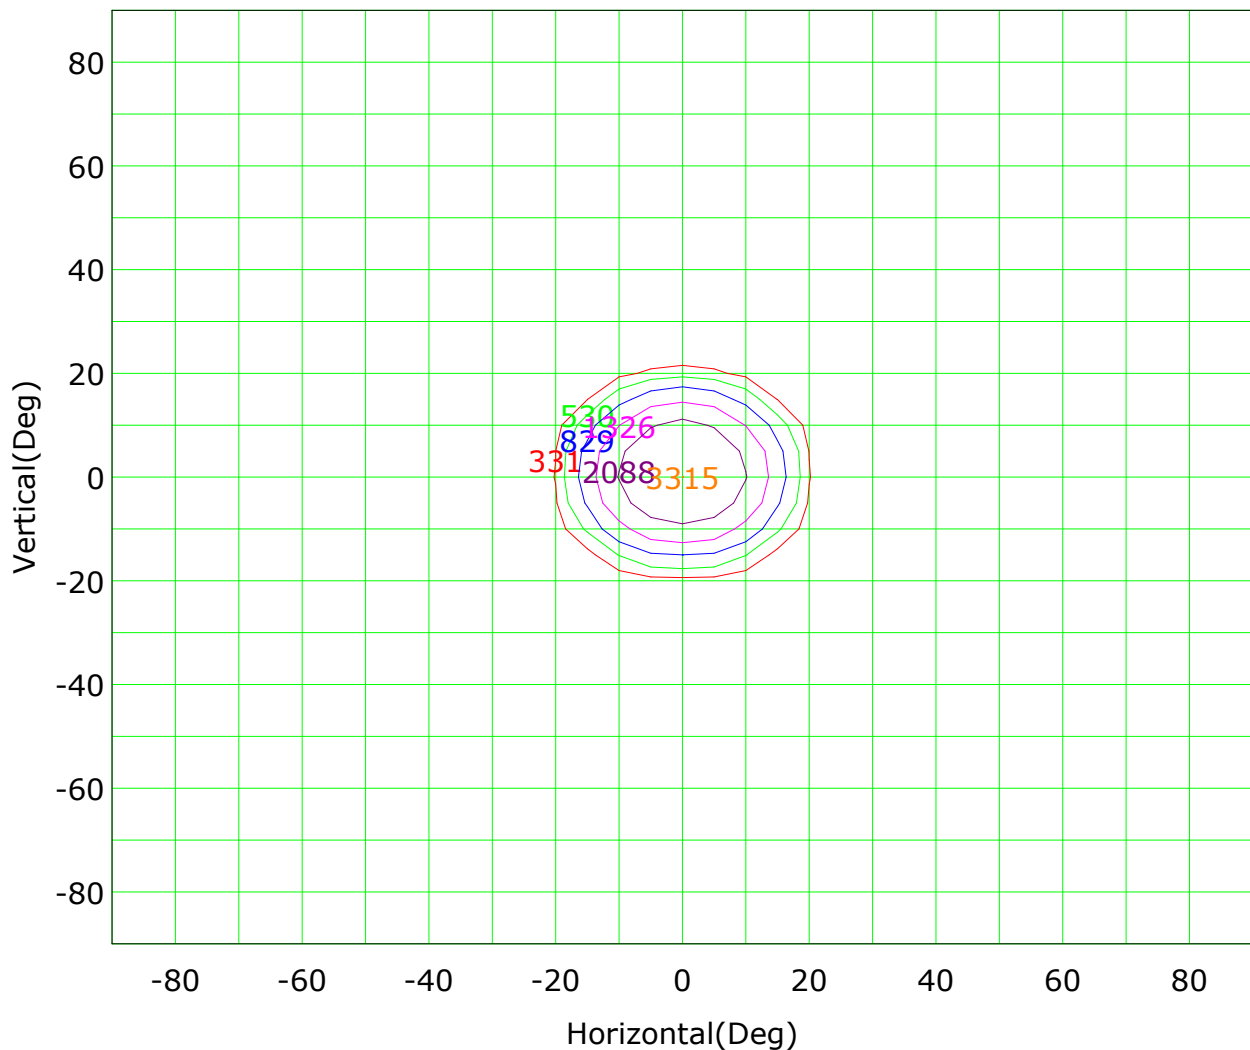

Imax (100%): 3315 cd

(10%): 331 cd	(16%): 530 cd
(25%): 829 cd	(40%): 1326 cd
(63%): 2088 cd	(100%): 3315 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

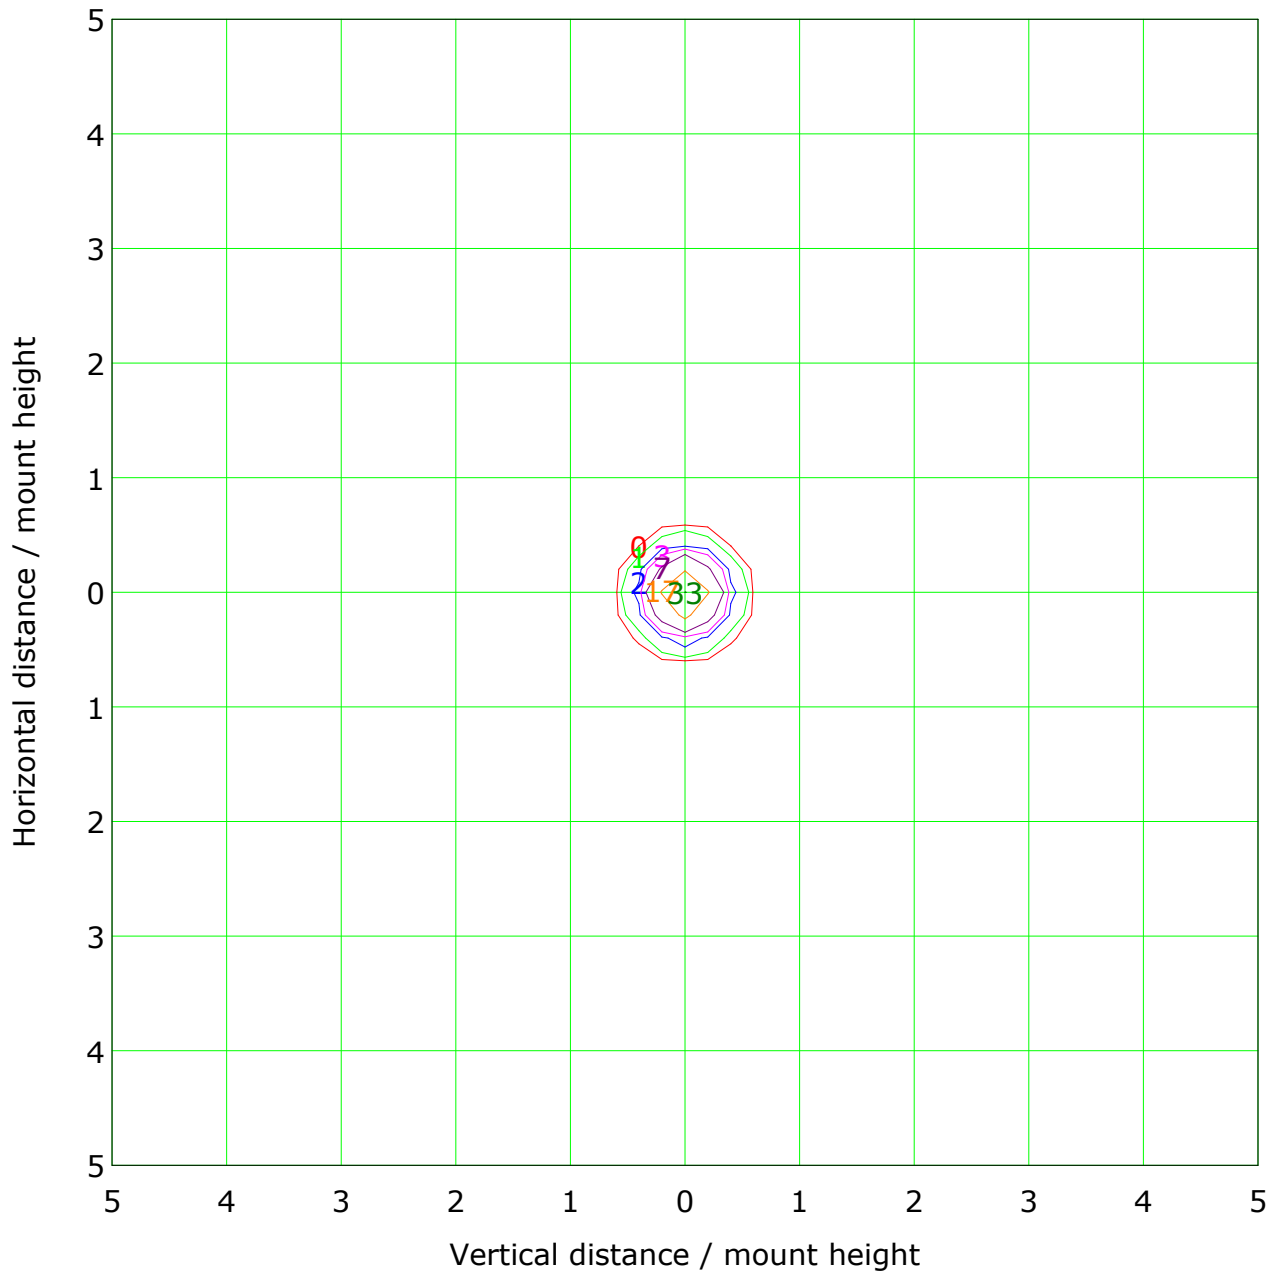

Mounting Height: 10m		Max Lux(100%): 33 lx	
— (1%):	0 lx	— (2%):	1 lx
— (5%):	2 lx	— (10%):	3 lx
— (20%):	7 lx	— (50%):	17 lx
— (100%):	33 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

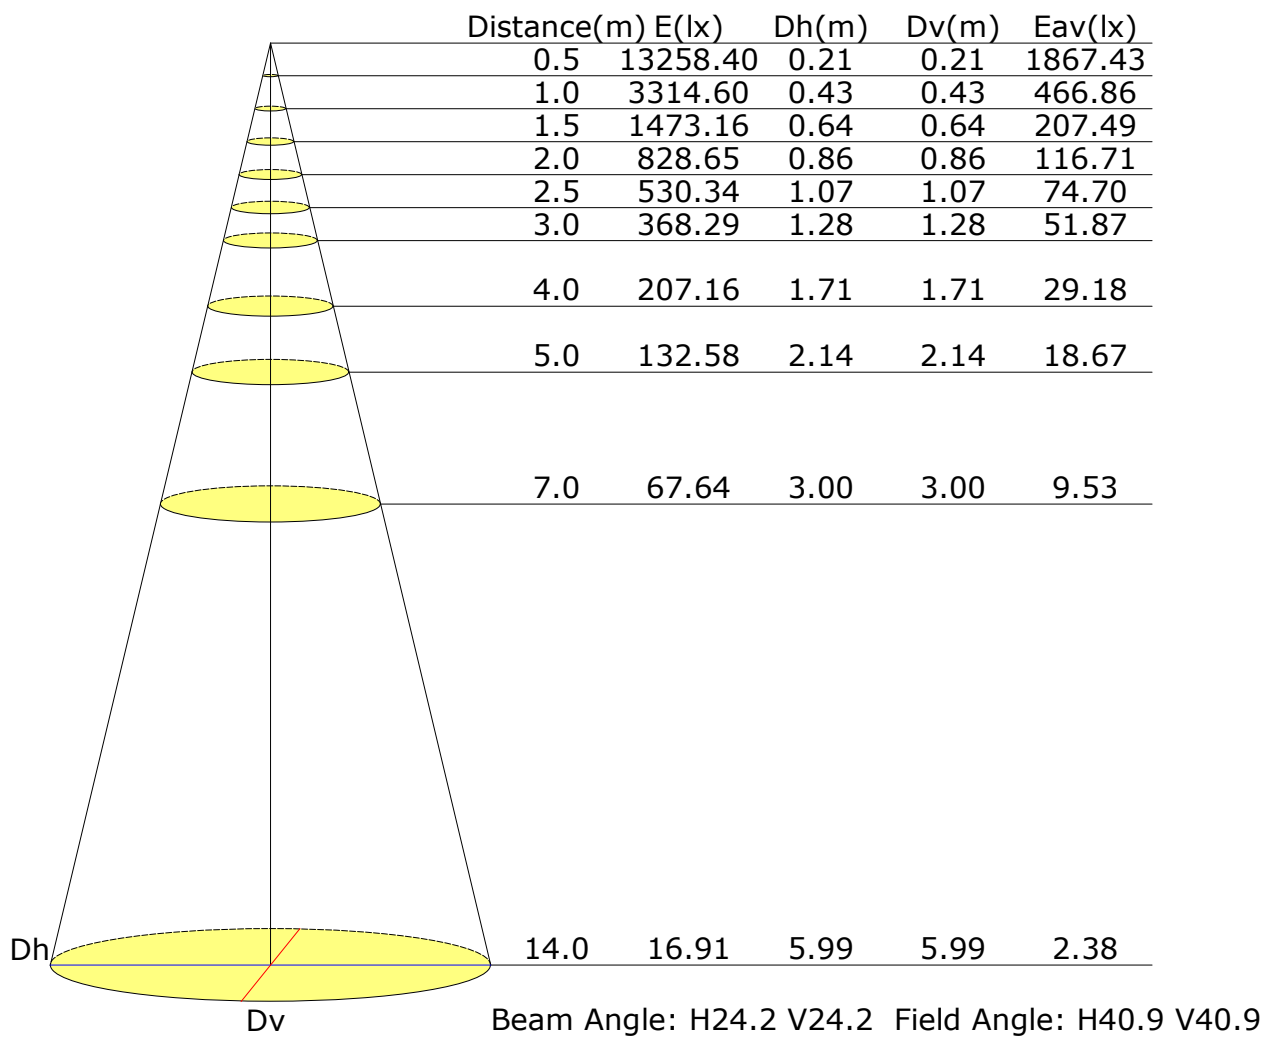

Vertical IsoLux Plot

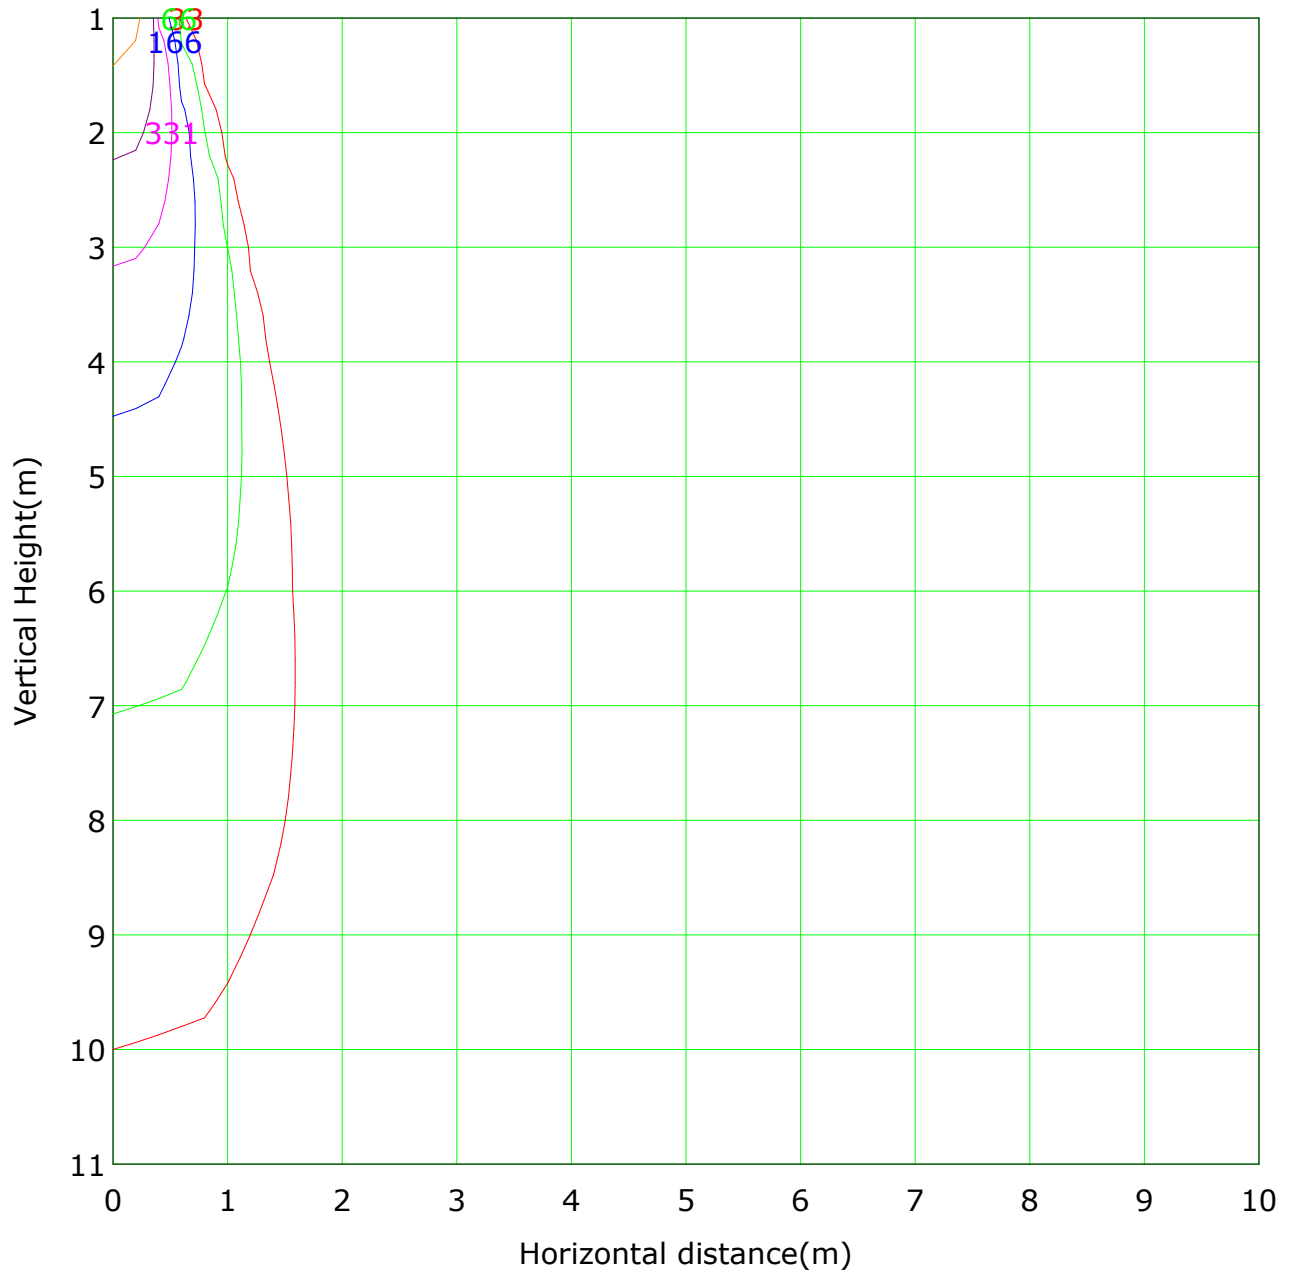


Lowest(m): 1m Highest(m): 11 Max Lux: 3315

(1%): 33 lx	(2%): 66 lx
(5%): 166 lx	(10%): 331 lx
(20%): 663 lx	(50%): 1657 lx
(100%): 3315 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

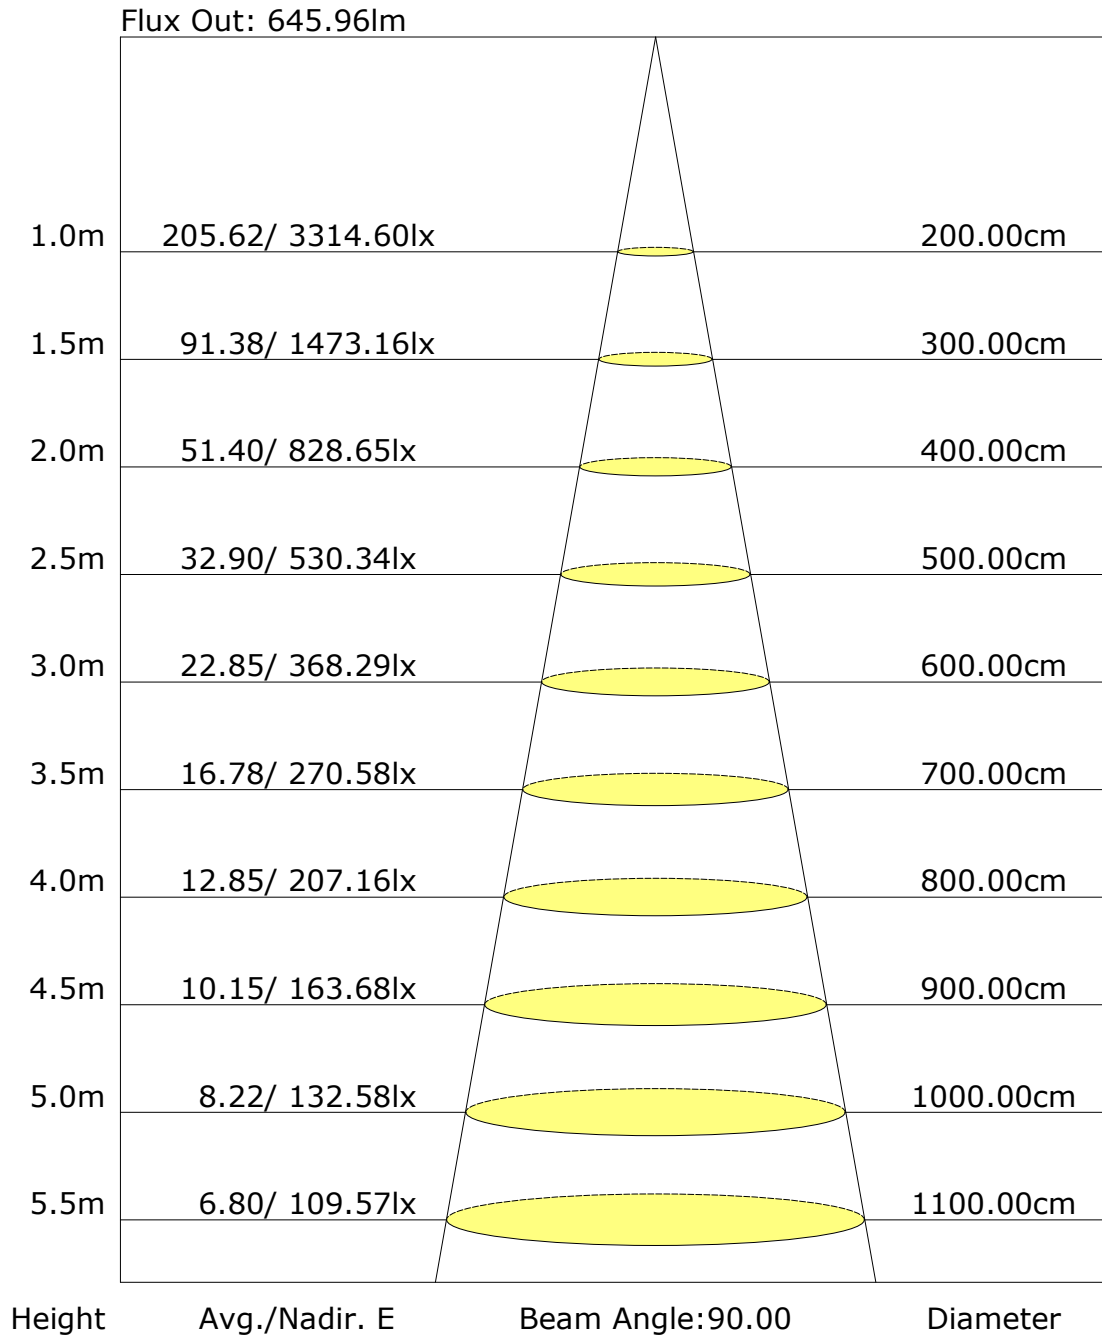

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: