

Report No.: 93.08012 SRA Surface Mounted Test Time: 2023-10-12 18:41

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 225.0 V

Current: 0.071 A

Power: 8.60 W

Power Factor: 0.539

Photometric Results

CIE Class: Direct

Measurement Flux: 644 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H47.3

Vertical Diffuse Angle(50%): V47.3

Luminaire Efficacy Rating (LER): 75

Max. Intensity: 1089.62 cd

Total Rated Lamp Lumens: 644.0 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1089.62 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

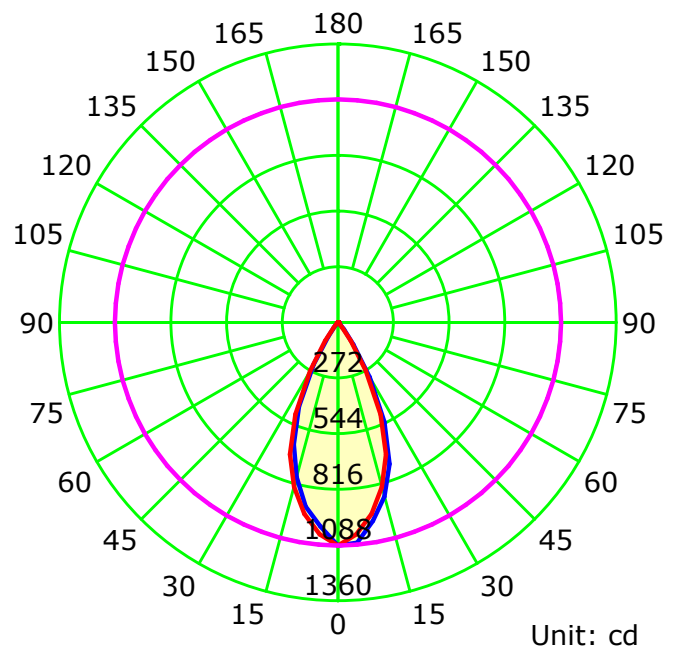

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

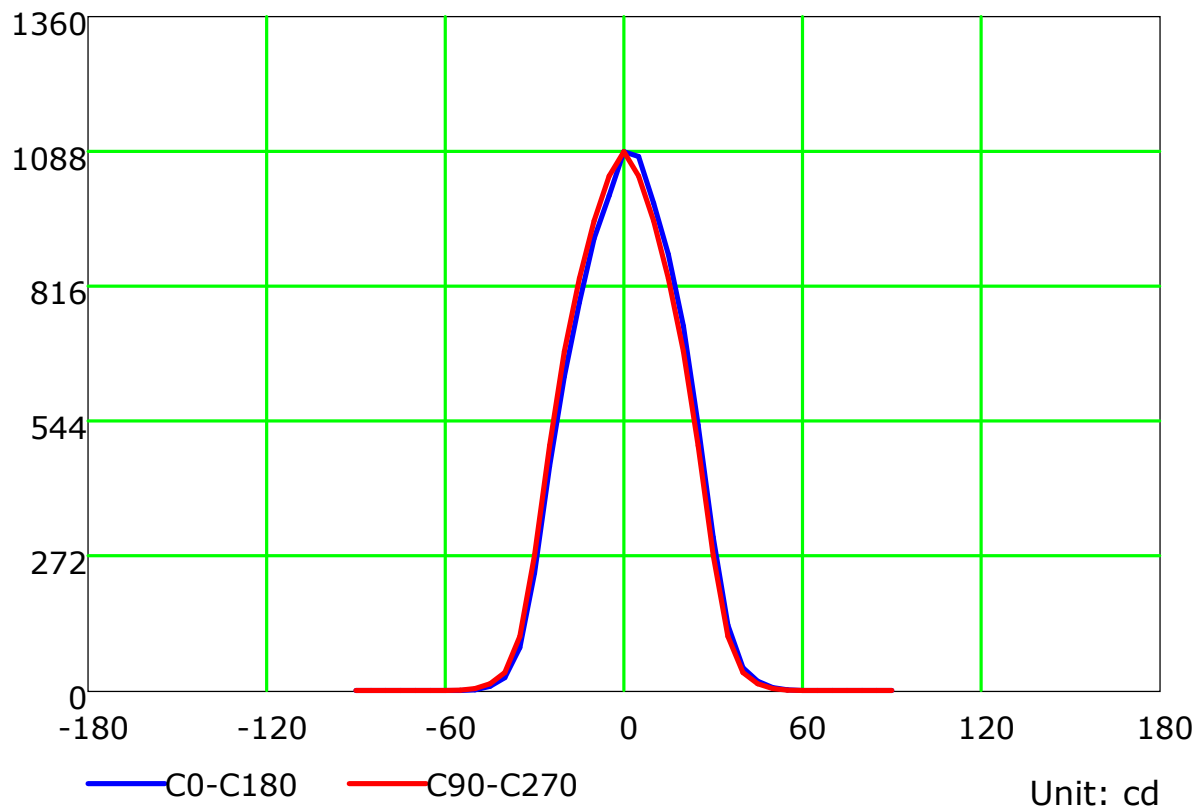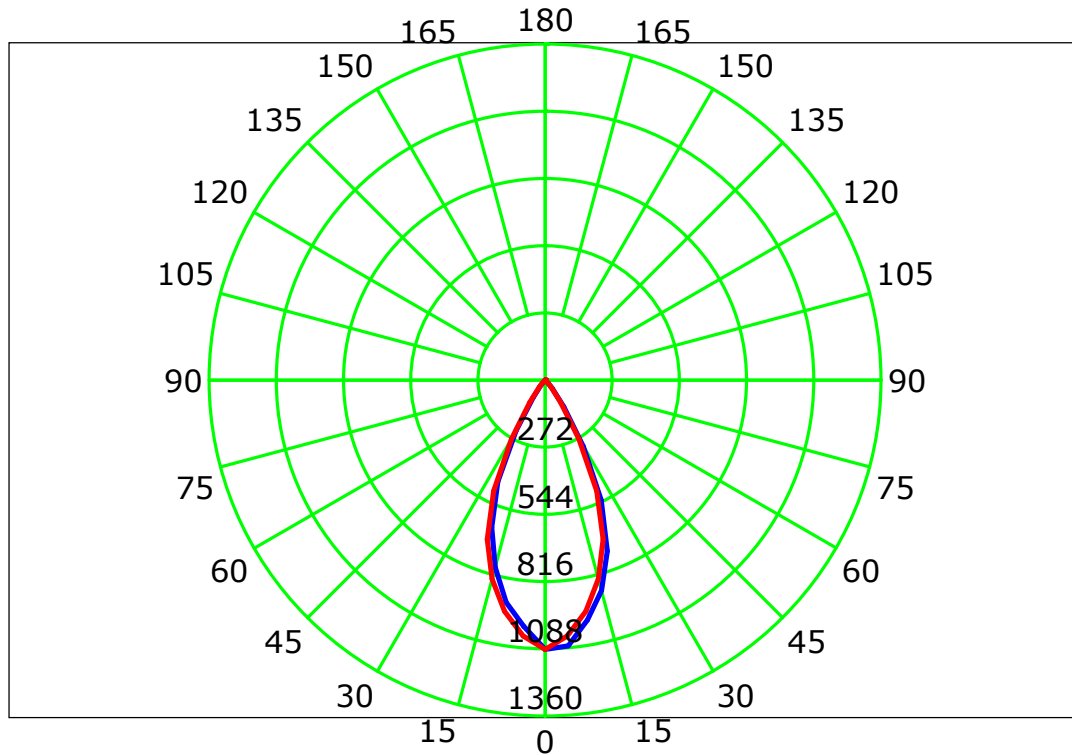

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

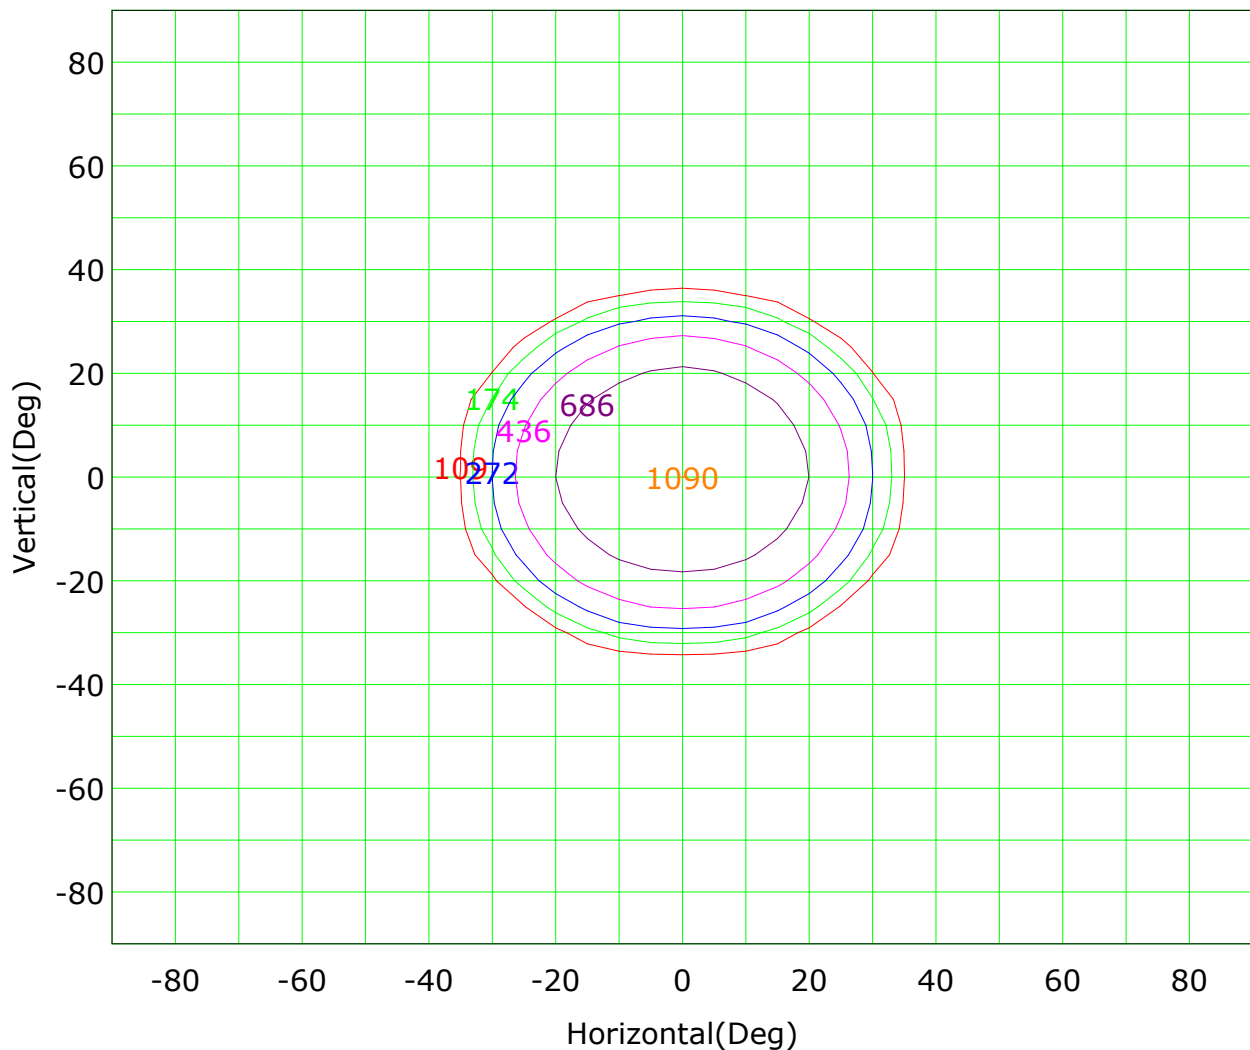

Imax (100%): 1090 cd

(10%):	109 cd	(16%):	174 cd
(25%):	272 cd	(40%):	436 cd
(63%):	686 cd	(100%):	1090 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

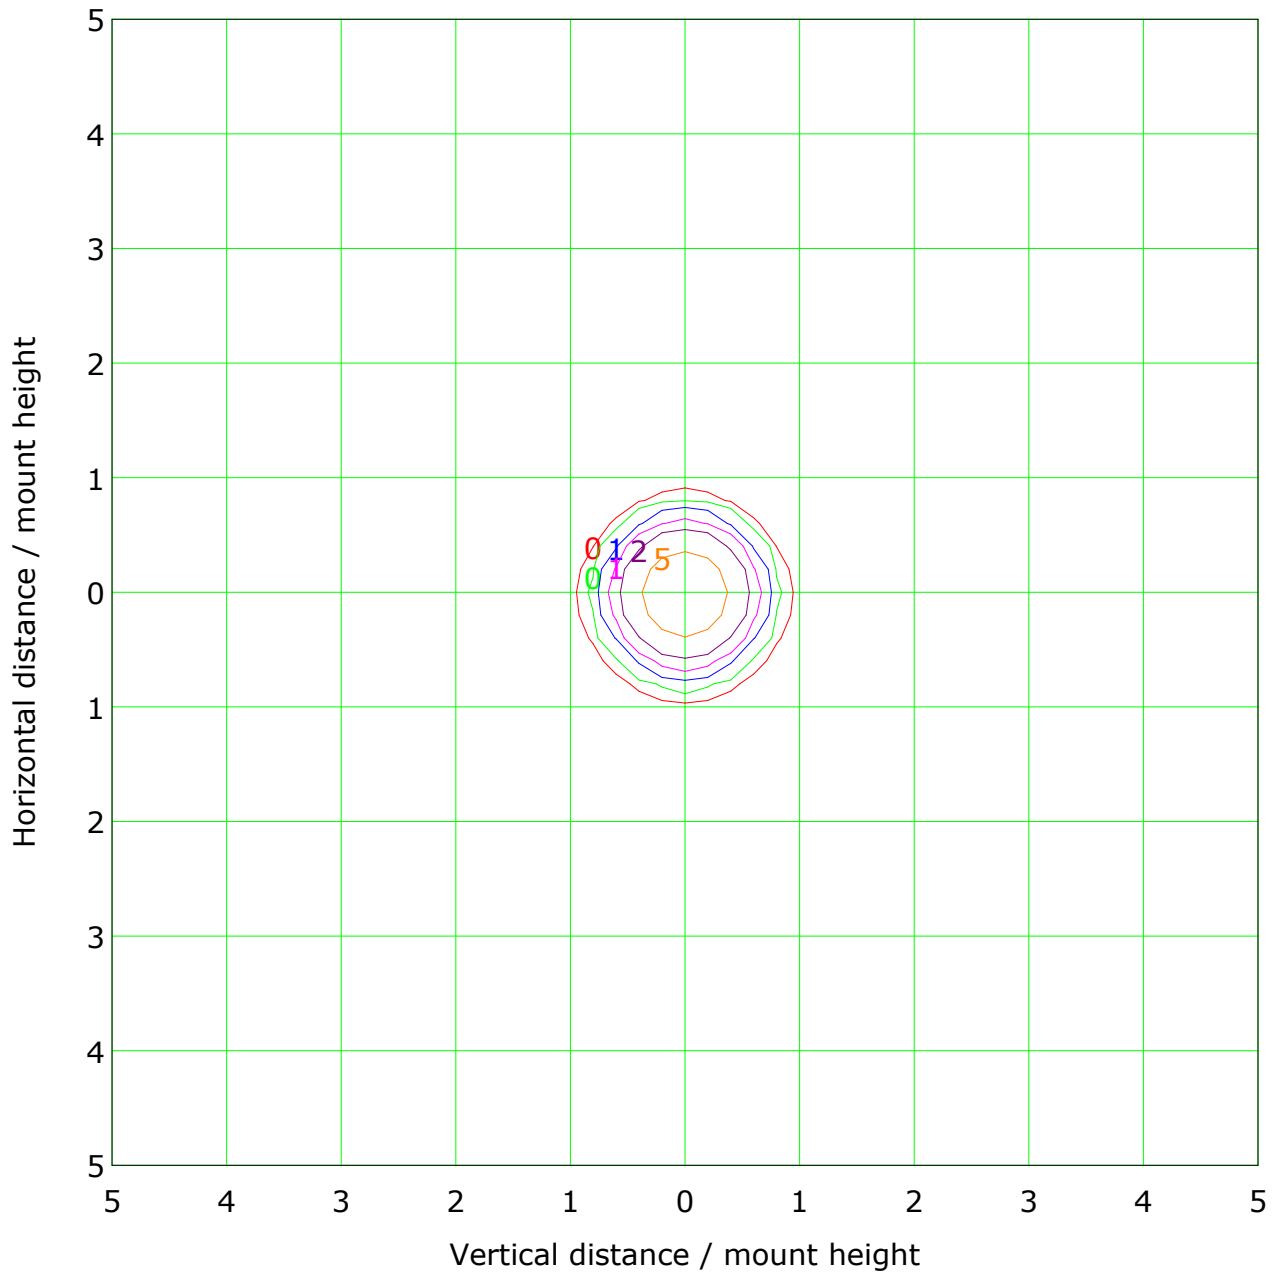


Mounting Height: 10m Max Lux(100%): 11 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	1 lx	— (10%):	1 lx
— (20%):	2 lx	— (50%):	5 lx
— (100%):	11 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

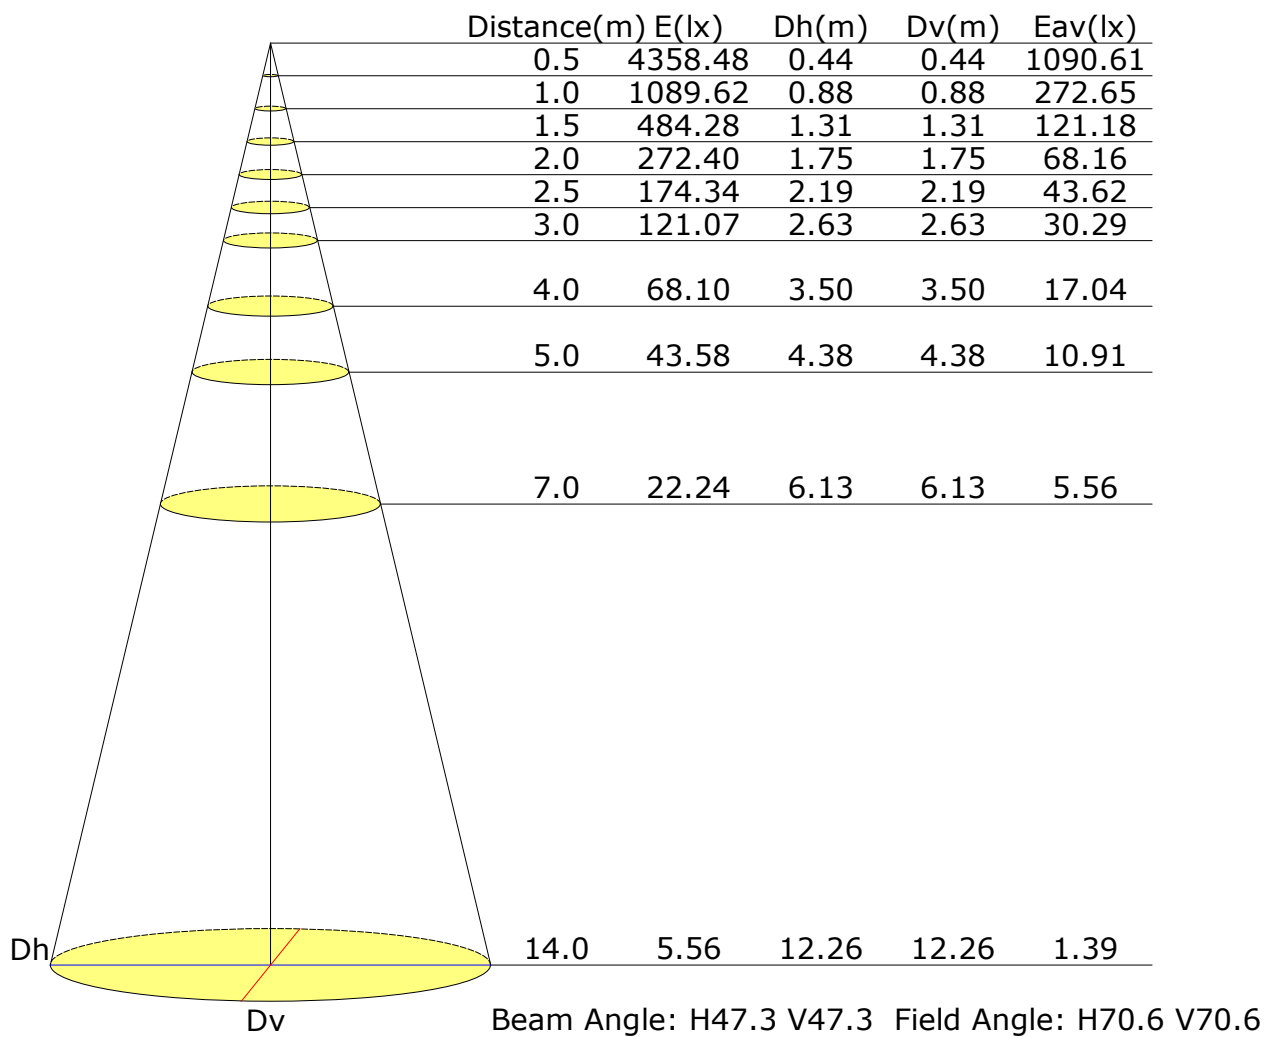

Vertical IsoLux Plot

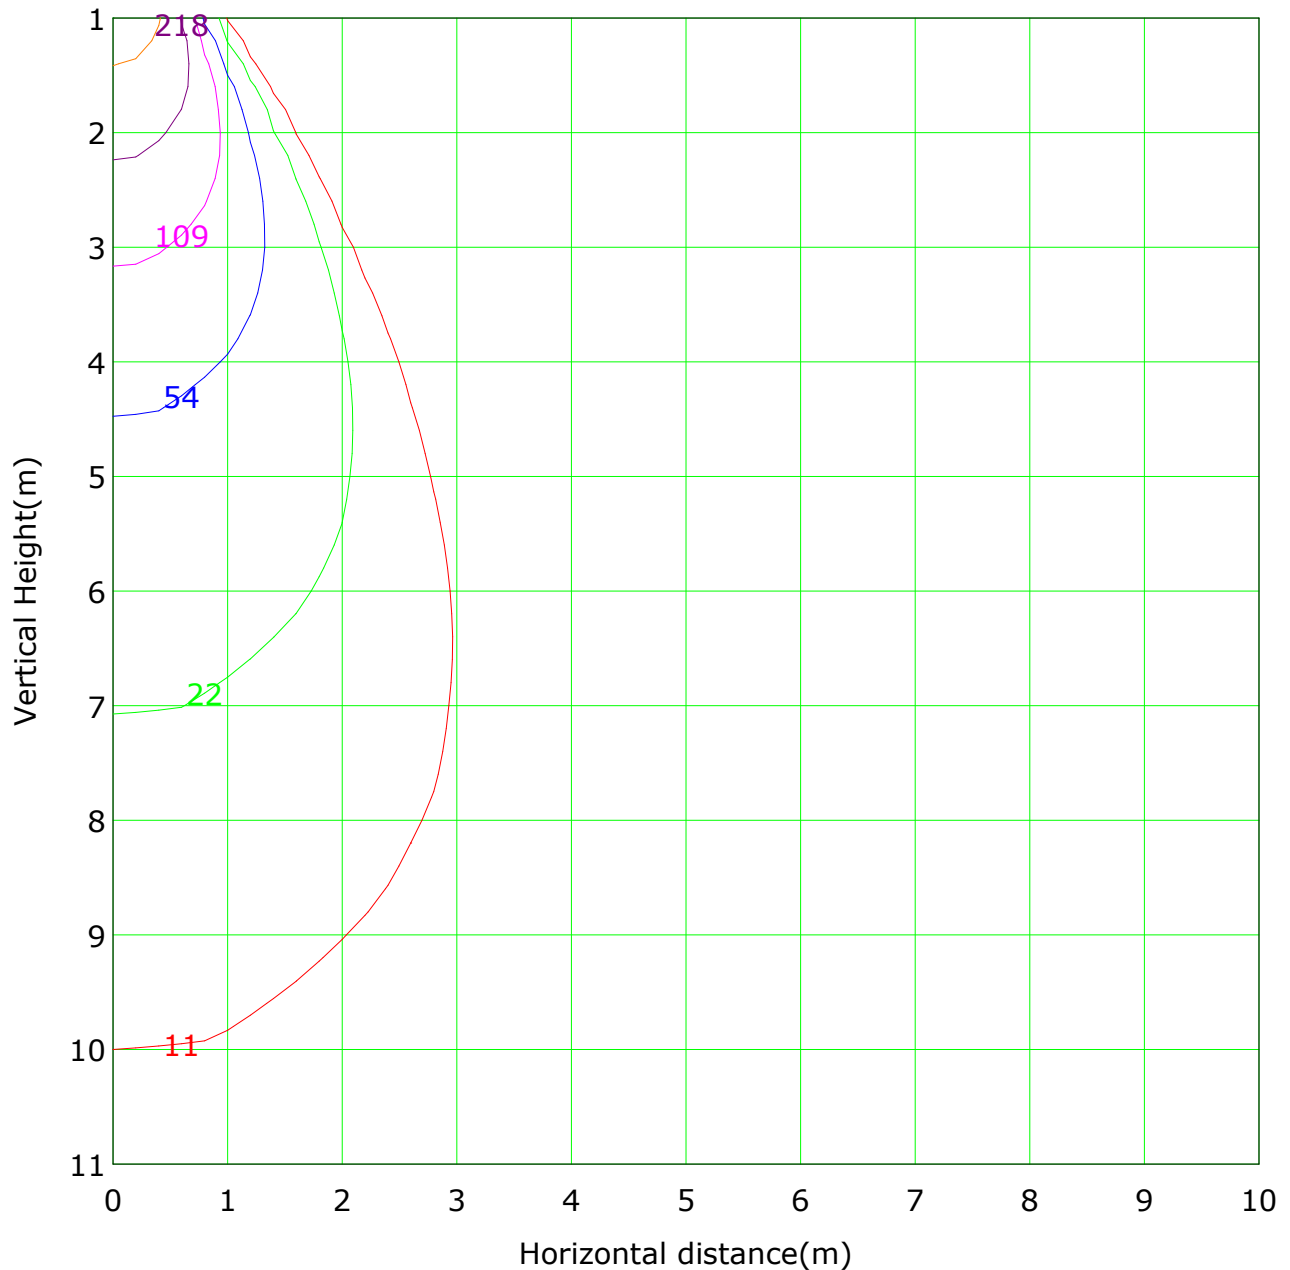


Lowest(m): 1m Highest(m): 11 Max Lux: 1090

(1%): 11 lx	(2%): 22 lx
(5%): 54 lx	(10%): 109 lx
(20%): 218 lx	(50%): 545 lx
(100%): 1090 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

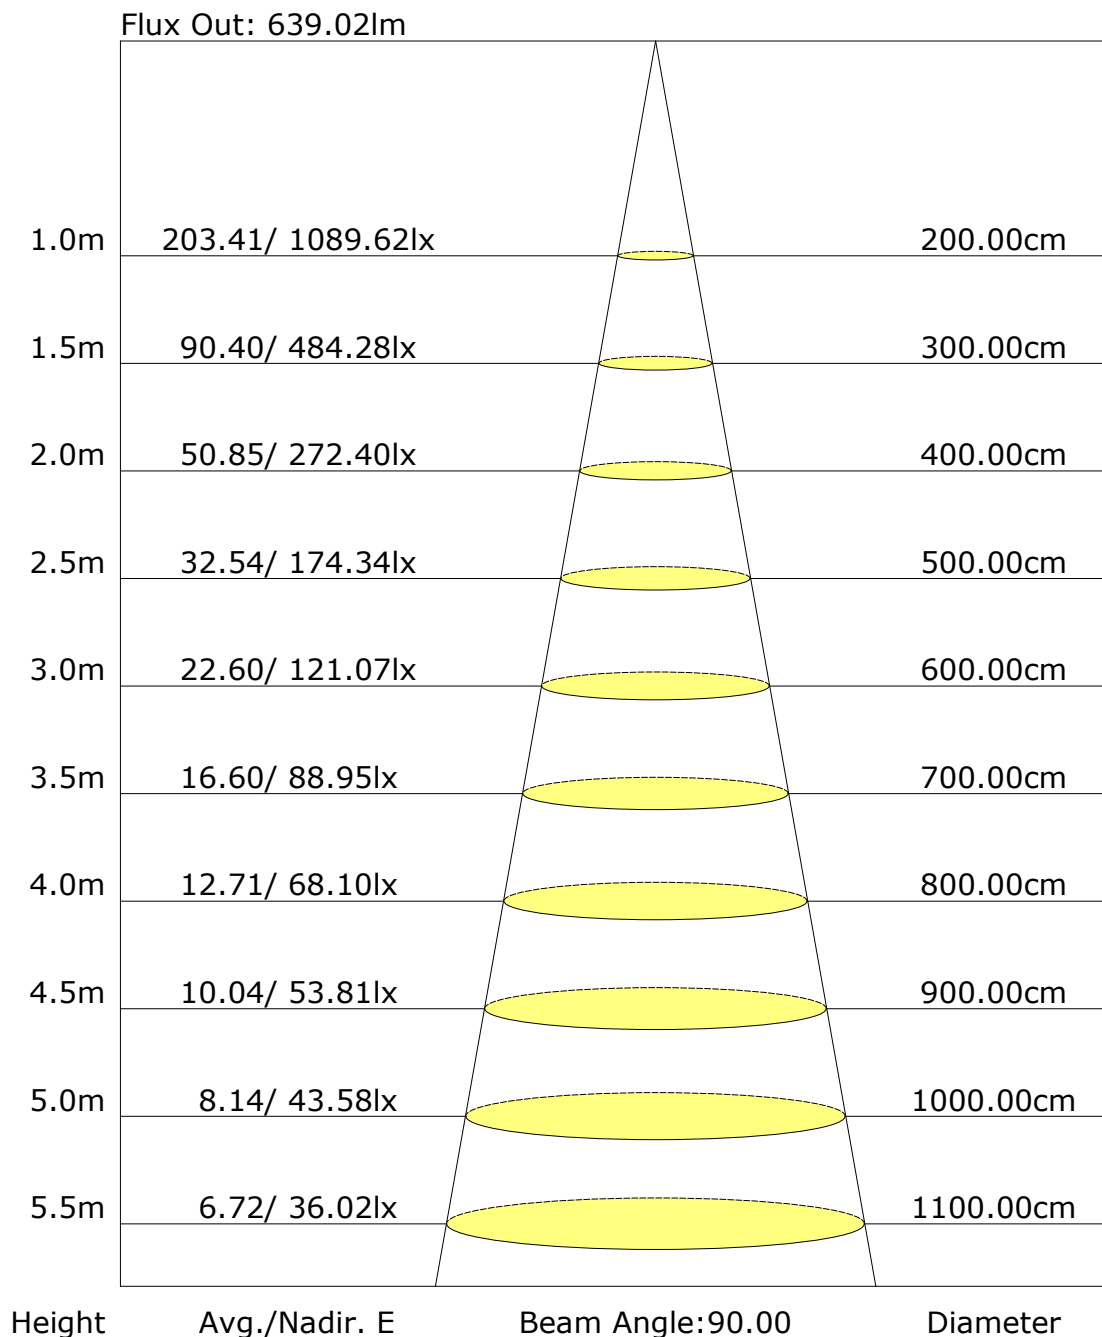

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: