
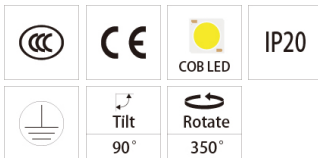
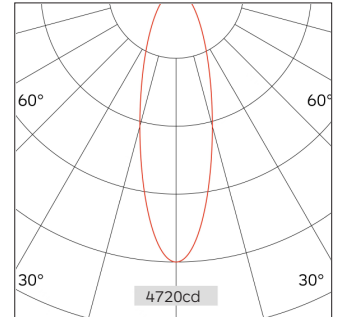


# 52.05518 SILO Recessed Downlight

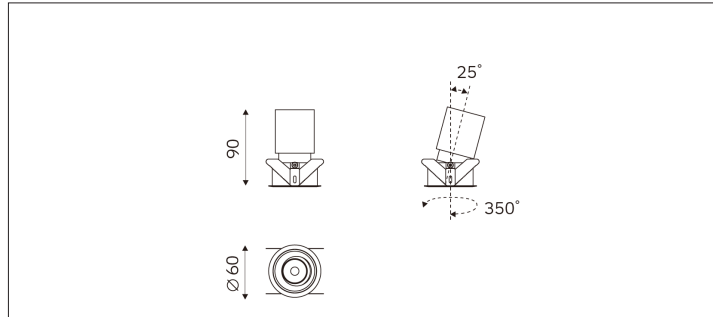

Light Distribution	SILO Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	17D/20D/29D/40D
Cut Out	55mm
Connected Load	11W
Luminous Flux Of The Luminaire	734lm
Luminaire Efficacy	67lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(M)	E(lx)	D(M)
		20°
1.0	4719.66	0.35
2.0	1179.92	0.71
3.0	524.41	1.06
4.0	294.98	1.42
5.0	188.79	1.77

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)