
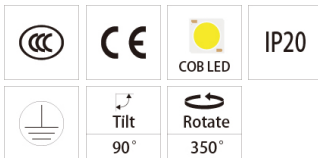
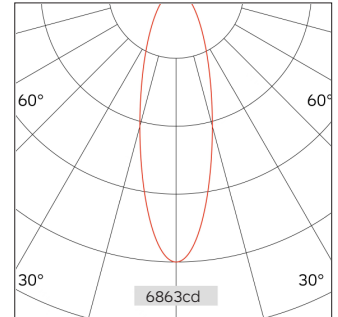


52.09526 SILO Recessed Downlight

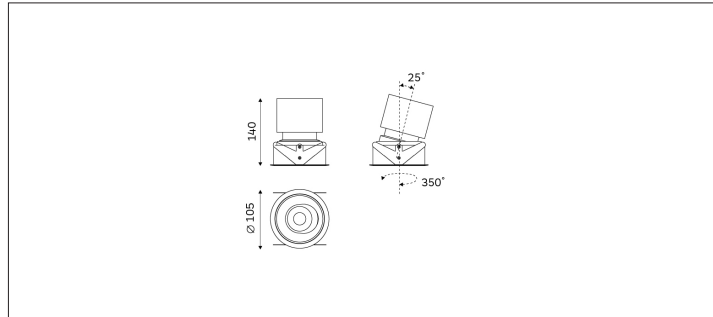

Light Distribution	SILO Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	19D/25D/39D/48D
Cut Out	95mm
Connected Load	28W
Luminous Flux Of The Luminaire	2974lm
Luminaire Efficacy	106lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.85Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(M)	E(lx)	D(M)
		39°
1.0	6863.21	0.72
2.0	1715.80	1.44
3.0	762.58	2.16
4.0	428.95	2.88
5.0	274.53	3.59

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)