



61.02316 SPARK 20 Accent Lighting

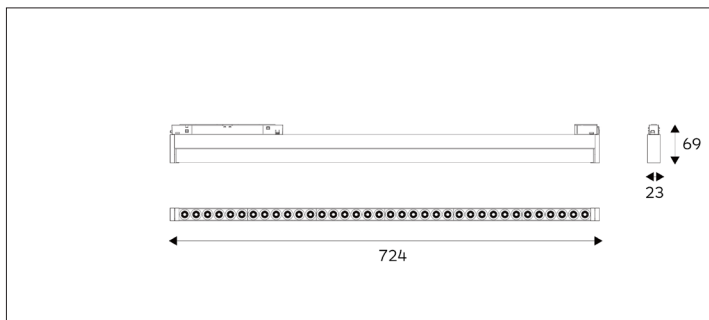

Connected Load	20W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Reflector
Beam Angle	32D/46D
Track	Low Voltage Track
Light Distribution	SPARK 20 Accent Lighting
Luminous Flux Of The Luminaire	1384lm
Luminaire Efficacy	69m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.8kg
Technical Region	Input 48V

Light Beam Table		
H(M)	E(lx)	D(M)
		32°
1.0	3698	0.58
2.0	924	1.15
3.0	410	1.73
4.0	231	2.31
5.0	147	2.88

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.