

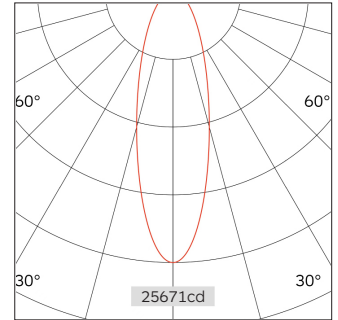
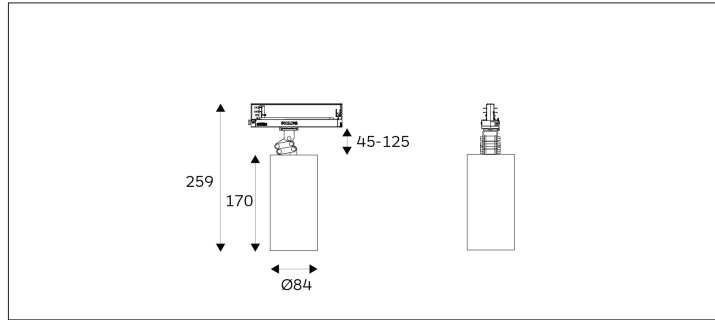


32.08416 Action Track lighting Flexible chain leg

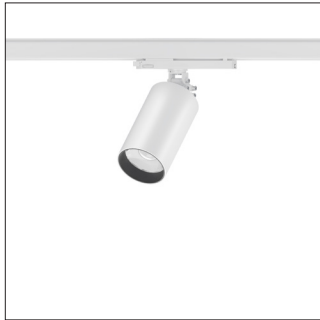

Connected Load	41W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	19D/24D/38D/52D
Track Phases	1 Circuit/ 3 Circuit
Light Distribution	Action Flexible chain leg
Luminous Flux Of The Luminaire	5001lm
Luminaire Efficacy	114lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.65kg
Technical Region	220-240V 50/60Hz

H(M)	E(lx)	D(M)
		24°
1.0	25671.95	0.42
2.0	6417.99	0.84
3.0	2852.44	1.26
4.0	1604.50	1.68
5.0	1026.88	2.11

This series uses our patented fixture body, fast heat dissipation, can be small size and higher wattage. There are 3 versions of this series, one piece ordinary model, flexible chain leg, and with gear box model, to meet the needs of different places, flexible chain leg is mainly used for deeper space with blot; with gear box