

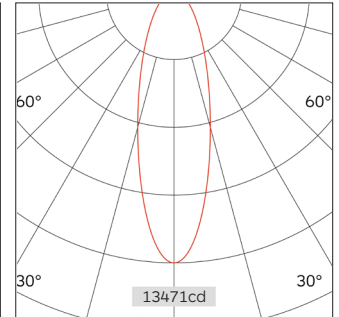


# 57.12511 SPECTRUM TRIMLESS DOWNLIGHT

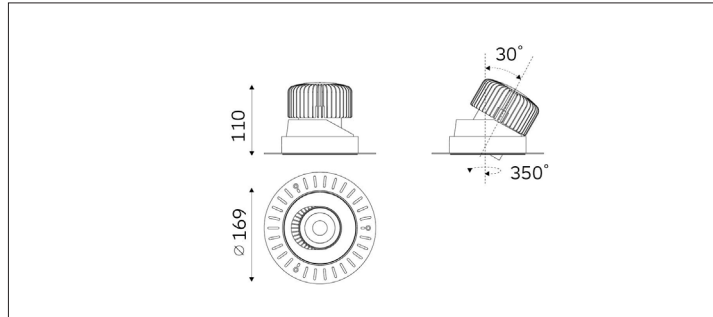

| Light Distribution             | Spectrum Downlight       |
|--------------------------------|--------------------------|
| Colour Temperature             | 2700/3000/3500/4000K     |
| Colour Rendition Index         | CRI 90                   |
| Optics                         | LENS                     |
| Beam Angle                     | 19D/24D/39D/52D          |
| Cut out                        | 125mm                    |
| Connected Load                 | 28W                      |
| Luminous Flux Of The Luminaire | 2678lm                   |
| Luminaire Efficacy             | 96lm/W                   |
| Colour Deviation               | SDCM <5                  |
| Light Source                   | LED                      |
| LED Type                       | COB                      |
| Dimming Method                 | Triac/1-10V/ Dali        |
| Cover Material                 | Aluminum                 |
| Body Material                  | Aluminum                 |
| IP Rating                      | IP20                     |
| Housing Colour                 | Sandy White/ Sandy Black |
| Weight                         | 1Kg                      |
| Technical Region               | 220-240V 50/60Hz         |

| Light Beam Table |       |      |
|------------------|-------|------|
| H(M)             | E(lx) | D(M) |
|                  |       | 24°  |
| 1.0              | 13471 | 0.36 |
| 2.0              | 3367  | 0.71 |
| 3.0              | 1496  | 1.07 |
| 4.0              | 841   | 1.43 |
| 5.0              | 538   | 1.79 |

Greater angle adjustment (up to 30d unidirectional), and at the same time with horizontal adjustment. Meet the lighting needs of different places. Share a variety of optical accessories, you can one body, free to change.