

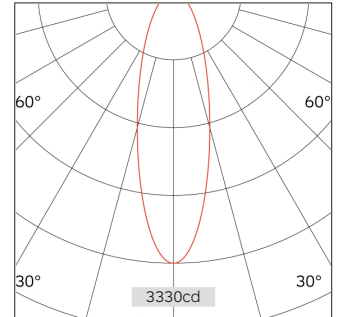


# 93.04513 EMMA Surface Mounted Lighting

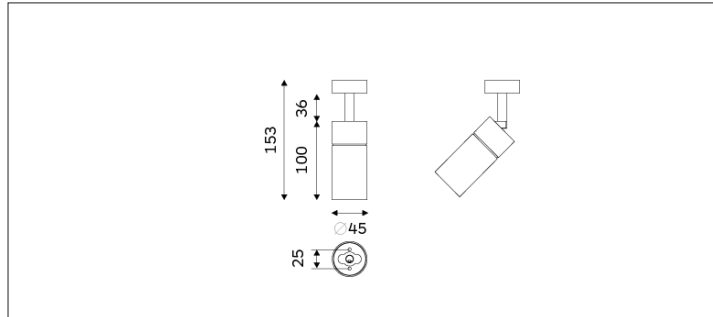

|                                |                          |
|--------------------------------|--------------------------|
| Light Distribution             | Surface Mounted Lighting |
| Colour Temperature             | 2700/3000/3500/4000K     |
| Colour Rendition Index         | CRI 90                   |
| Optics                         | LENS                     |
| Beam Angle                     | 19D/29D/44D/56D          |
| Installation Method            | Surface Mounted          |
| Connected Load                 | 11W                      |
| Luminous Flux Of The Luminaire | 935lm                    |
| Luminaire Efficacy             | 85lm/W                   |
| Colour Deviation               | SDCM <5                  |
| Light Source                   | LED                      |
| LED Type                       | COB                      |
| Dimming Method                 | Triac/1-10V/ Dali        |
| Cover Material                 | Aluminum                 |
| Body Material                  | Aluminum                 |
| IP Rating                      | IP20                     |
| Housing Colour                 | Sandy White/ Sandy Black |
| Weight                         | 0.35Kg                   |
| Technical Region               | 220-240V 50/60Hz         |

| H(M) | E(lx)   | D(M) |
|------|---------|------|
|      |         | 29°  |
| 1.0  | 3330.81 | 0.53 |
| 2.0  | 832.70  | 1.06 |
| 3.0  | 370.09  | 1.60 |
| 4.0  | 208.18  | 2.13 |
| 5.0  | 133.23  | 2.66 |

Application areas: retail, museums, hospitality, residential, offices and lobbies.