

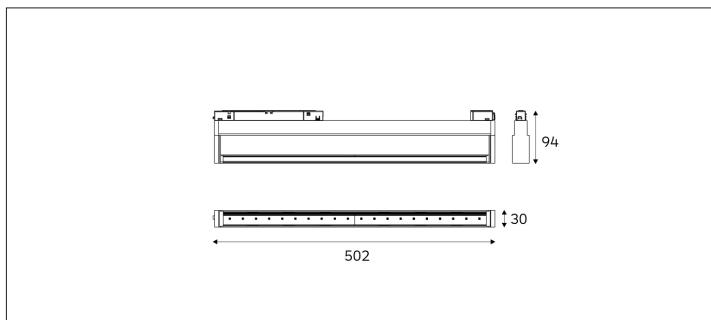


61.03002 SPARK 20 Accent Lighting



Connected Load	40W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Track Phases	Low Voltage Track
Light Distribution	SPARK 20 Accent Lighting
Luminous Flux Of The Luminaire	2800lm
Luminaire Efficacy	70lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	Triac/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	1.2kg
Technical Region	Input 48V

Light Beam Table		
H(M)	E(lx)	D(M)

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.