
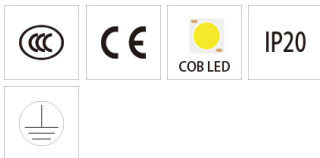
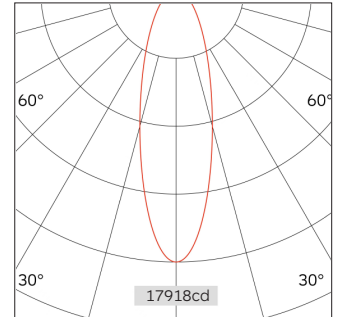


52.09 5 3 1 Intero Recessed Downlight

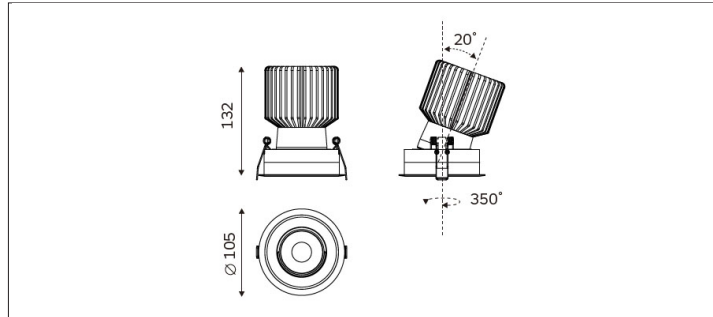

Light Distribution	Intero Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	26D/31D/41D/49D
Cut Out	95mm
Connected Load	42W
Luminous Flux Of The Luminaire	4755lm
Luminaire Efficacy	113.22lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.9Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		26°
1.0	17918.00	0.46
2.0	4479.50	0.93
3.0	1990.89	1.39
4.0	1119.88	1.85
5.0	716.72	2.32

Widely used in star hotels, high-end clubs, homes, offices and stores, Large shopping malls, chain stores and so on.