



# 55.05013 Mine Recessed Downlight



IP20

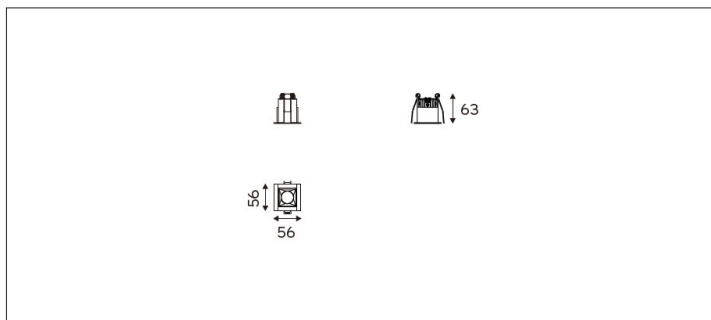

Light Distribution	Mine Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	23D/46D
Cut Out	50x50mm
Connected Load	5W
Luminous Flux Of The Luminaire	356lm
Luminaire Efficacy	71.2lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.2Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		23°
1.0	1524.15	0.41
2.0	381.04	0.81
3.0	169.35	1.22
4.0	95.26	1.62
5.0	60.97	2.03

A modern design consisting for the purpose to meet the highest requirements of the latest advanced lighting technology. Application areas: retail, museums, hospitality, residential, offices and lobbies.