
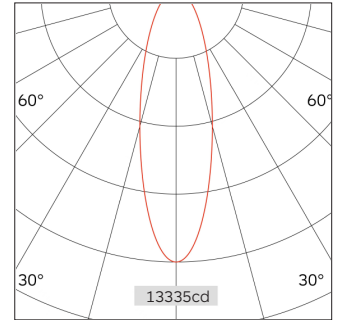


52.08513 Leko Recessed Downlight

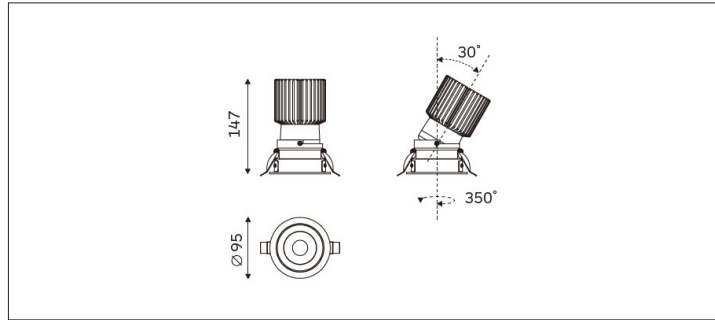

Light Distribution	Leko Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	25D/32D/43D/53D
Cut Out	85mm
Connected Load	28.5W
Luminous Flux Of The Luminaire	3340lm
Luminaire Efficacy	117.2lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
		25°
1.0	13335.34	0.45
2.0	3333.83	0.90
3.0	1481.70	1.35
4.0	833.46	1.81
5.0	533.41	2.26

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.