

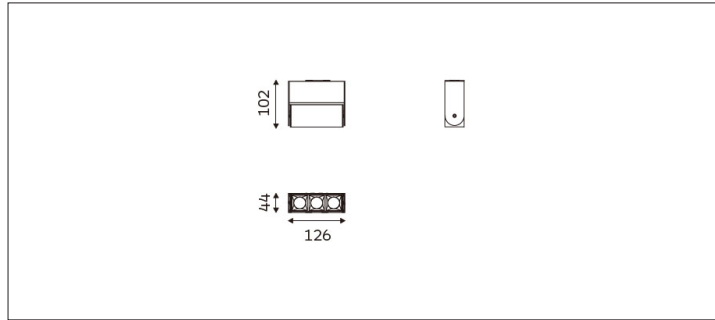


95.04511 Mine Surface Mounted Light



| | |
|--------------------------------|----------------------------|
| Light Distribution | Mine Surface Mounted Light |
| Colour Temperature | 2700/3000/3500/4000K |
| Colour Rendition Index | CRI 90 |
| Optics | Lens |
| Beam Angle | 23D/50D |
| Installation method | Surface Mounted |
| Connected Load | 12W |
| Luminous Flux Of The Luminaire | 1049lm |
| Luminaire Efficacy | 87.4lm/W |
| Colour Deviation | SDCM < 5 |
| Light Source | LED |
| LED Type | SMD |
| Dimming Method | Triac/0-10V/ Dali |
| Cover Material | Aluminum |
| Body Material | Aluminum |
| IP Rating | IP20 |
| Housing Colour | Sandy White/ Sandy Black |
| Weight | 0.3Kg |
| Technical Region | 220-240V 50/60Hz |

| Light Beam Talbe | | |
|------------------|---------|------|
| h(m) | E(lx) | D(m) |
| | | 23° |
| 1.0 | 4198.69 | 0.41 |
| 2.0 | 1049.67 | 0.83 |
| 3.0 | 466.52 | 1.24 |
| 4.0 | 262.42 | 1.65 |
| 5.0 | 167.95 | 2.06 |

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options. Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.