
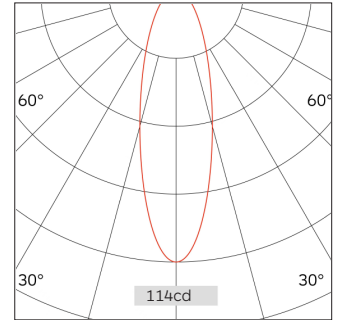


52.04521 Reflex Recessed Downlight

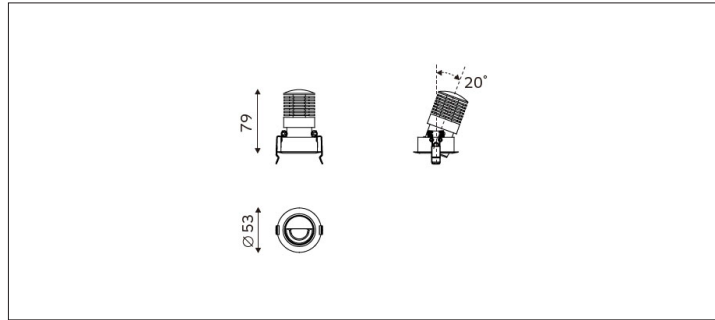

Light Distribution	Reflex Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	Wall Washer
Cut Out	45mm
Connected Load	8W
Luminous Flux Of The Luminaire	117lm
Luminaire Efficacy	14.6lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
1.0	114.44	1.02
2.0	28.61	2.05
3.0	12.72	3.07
4.0	7.15	4.09
5.0	4.58	5.11

Application areas:
Commercial spaces, malls,
stores, retail projects,
hotels, museums and
gyms.