



52.05526 Mini Pro Recessed Downlight

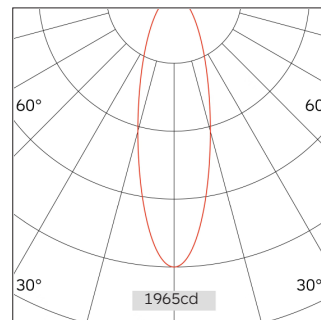

IP20

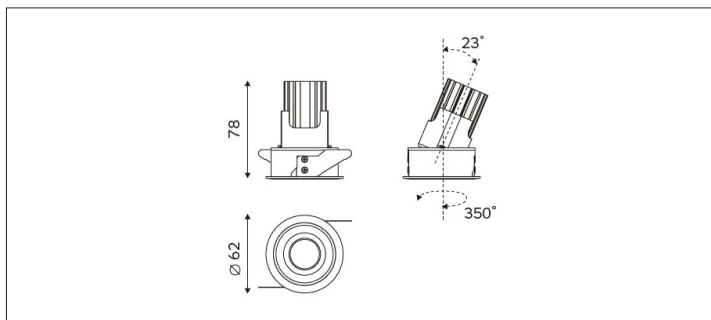

Light Distribution	Mini Pro Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	19D/25D/38D/57D
Cut Out	55mm
Connected Load	7.6W
Luminous Flux Of The Luminaire	481lm
Luminaire Efficacy	63.2lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.5Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		25°
1.0	1965.50	0.44
2.0	491.38	0.89
3.0	218.39	1.33
4.0	122.84	1.78
5.0	78.62	2.22

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.