
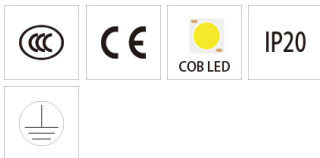
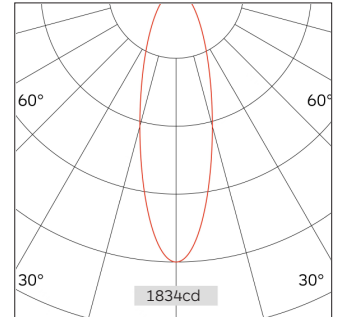


52.08016 Reflex Recessed Downlight

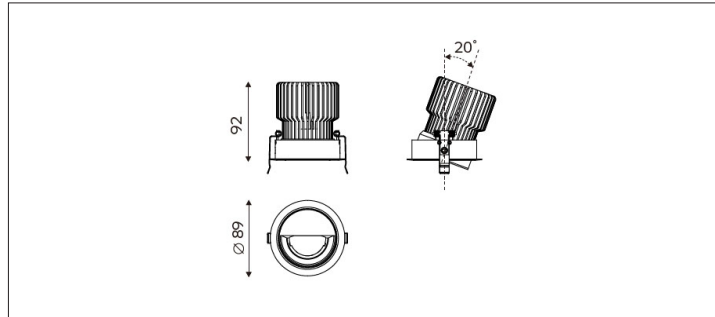

Light Distribution	Reflex Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	Wall Washer
Cut Out	80mm
Connected Load	24W
Luminous Flux Of The Luminaire	1219lm
Luminaire Efficacy	50.8lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
1.0	1834.77	0.61
2.0	458.69	1.21
3.0	203.86	1.82
4.0	114.67	2.42
5.0	73.39	3.03

Application areas:
Commercial spaces, malls,
stores, retail projects,
hotels, museums and
gyms.