

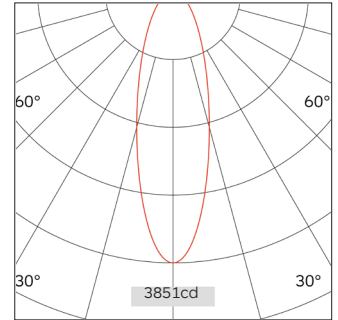
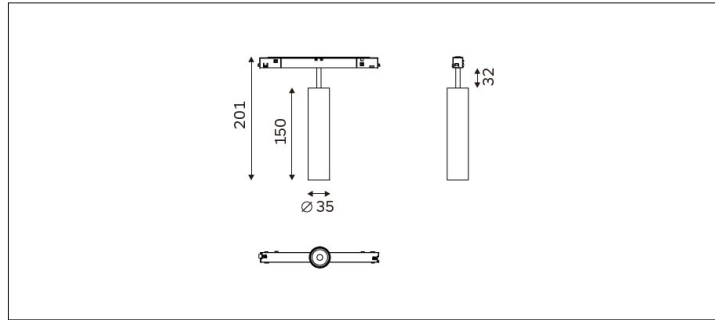


# 62.03518 Lanky Low Voltage Track Light



Light Distribution	Lanky Low Voltage Track Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	26D/35D/46D/57D
Track Phases	Low Voltage Track
Connected Load	12W
Luminous Flux Of The Luminaire	1036 lm
Luminaire Efficacy	86lm/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.5Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		26°
1.0	3851.29	0.47
2.0	962.82	0.95
3.0	427.92	1.42
4.0	240.71	1.89
5.0	154.05	2.36

Application areas: clothing shops, furnitureshops and other brand boutiques, car displays,jewelry, star hotels, high-end clubs, museums,professional windows, and other high-endcommercial places.