




## 32.04532 MINE TRACK LIGHTING



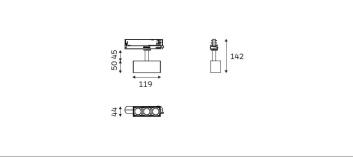





Light Distribution	MINE TRACK LIGHTING	
Colour Temperature	2700/3000/3500/4000K	
Colour Rendition Index	CRI 90	
Optics	Lens	
Beam Angle	23D/50D	
Track Phases	1 Circuit/ 3 Circuit	
Connected Load	12W	
Luminous Flux Of The Luminaire	1049 lm	
Luminaire Efficacy	87.42lm/W	
Colour Deviation	SDCM<5	
Light Source	LED	
LED Type	SMD	
Dimming Method	Triac/1-10V/ Dali	
Cover Material	Aluminum	
Body Material	Aluminum	
IP Rating	IP20	
Housing Colour	Sandy White/ Sandy Black	
Weight	0.5Kg	
Technical Region	220-240V 50/60Hz	

Light bed	iii raibe	
h(m)	E(lx)	D(m)
		23°
1.0	4198.69	0.41
2.0	1049.67	0.83
3.0	466.52	1.24
4.0	262.42	1.65
5.0	167.95	2.06

High lumen track lights use LED technology, which is more energy efficient than traditional lighting products. Classic style rail fixtures often incorporate design elements of traditional fixtures for a classic and elegant look.