

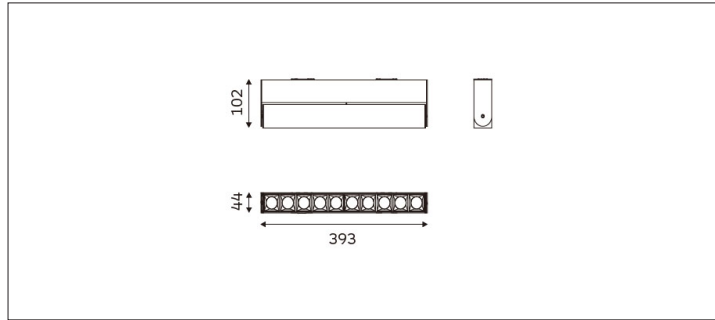


95.04513 Mine Surface Mounted Light



Light Distribution	Mine Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	23D/49D
Installation method	Surface Mounted
Connected Load	40W
Luminous Flux Of The Luminaire	3485lm
Luminaire Efficacy	87.1lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	SMD
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		23°
1.0	14635.59	0.41
2.0	3658.9	0.82
3.0	1626.18	1.23
4.0	914.72	1.64
5.0	585.42	2.04

Have track rail, Recessed and surface mounted installed methods for options. Track light also have with intrack adaptor and with gear box two options. Very flexible, any length is available. Also high power, 1H can be max 5W, meet different places high lumen requirements.