



# 91.10511 T1a Surface Mounted Light

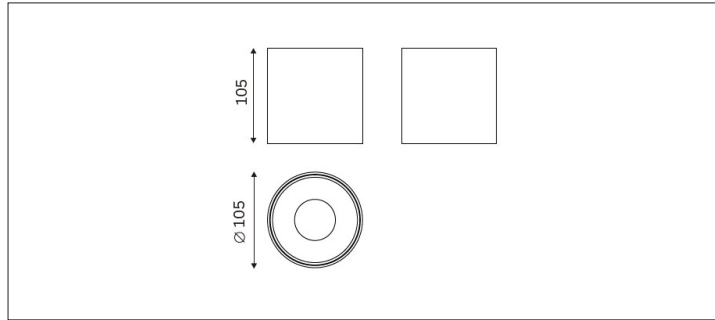

Light Distribution	T1a Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	17D/26D/34D/58D
Installation method	Surface Mounted
Connected Load	13.5W
Luminous Flux Of The Luminaire	1484lm
Luminaire Efficacy	109.9lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
h(m)	E(lx)	D(m)
		26°
1.0	5228.42	0.46
2.0	1307.10	0.93
3.0	580.94	1.39
4.0	326.78	1.86
5.0	209.14	2.32

Blends seamlessly into various environments with practical styles. Available in different wattages and sizes to meet diverse needs. Classic appearance, simple, durable and practical, the best choice for commercial space.