



62.02515 Lanky Low Voltage Track Light





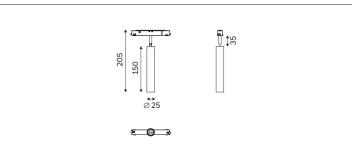



	Light Distribution	Lanky Low Voltage Track Light
	Colour Temperature	2700/3000/3500/4000K
	Colour Rendition Index	CRI 90
	Optics	Lens
	Beam Angle	20D/25D/35D/55D
	Track Phases	Low Voltage Track
	Connected Load	9W
	Luminous Flux Of The Luminaire	510 lm
	Luminaire Efficacy	56lm/W
	Colour Deviation	SDCM<5
	Light Source	LED
	LED Type	COB
	Dimming Method	0-10V/ Dali
	Cover Material	Aluminum
	Body Material	Aluminum
	IP Rating	IP20
	Housing Colour	Sandy White/ Sandy Black
	Weight	0.4Kg
	Technical Region	Input 48V

Light Bear	n Talbe	
h(m)	E(lx)	D(m)
		25°
1.0	2217.27	0.44
2.0	554.32	0.87
3.0	246.36	1.31
4.0	138.58	1.75
5.0	88.69	2.19

Application areas: clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, professional windows, and other high-end commercial places.