



51.03822 Mini Pro Recessed Downlight



IP20

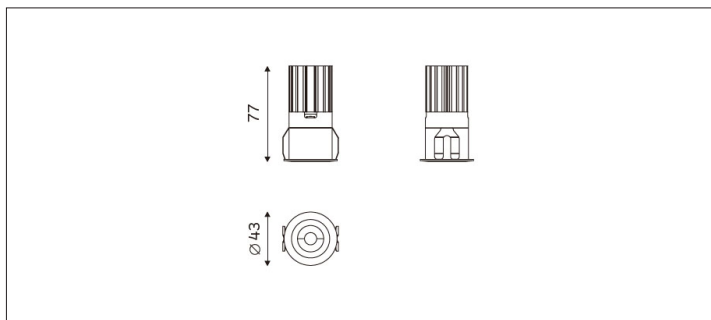

Light Distribution	Mini Pro Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	20D/27D/35D/43D
Cut Out	38mm
Connected Load	7.6W
Luminous Flux Of The Luminaire	470lm
Luminaire Efficacy	61.8lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe

h(m)	E(lx)	D(m)
		27°
1.0	1578.28	0.48
2.0	394.57	0.95
3.0	175.36	1.43
4.0	98.64	1.90
5.0	63.13	2.38

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.