

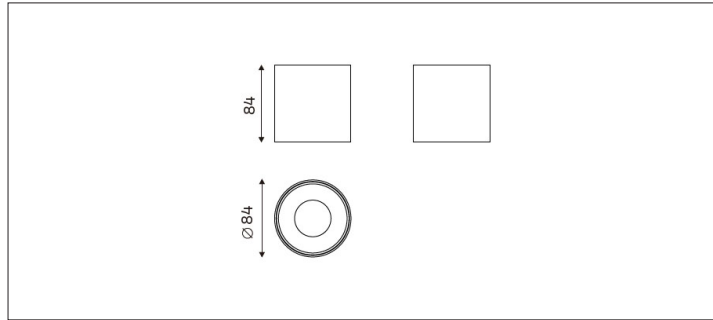


91.08412 T1a Surface Mounted Light



Light Distribution	T1a Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	21D/23D/35D/60D
Installation method	Surface Mounted
Connected Load	9W
Luminous Flux Of The Luminaire	1092lm
Luminaire Efficacy	121.3lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
h(m)	E(lx)	D(m)
		23°
1.0	3768.86	0.40
2.0	942.22	0.80
3.0	418.76	1.20
4.0	235.55	1.60
5.0	150.75	2.00

Blends seamlessly into various environments with practical styles. Available in different wattages and sizes to meet diverse needs. Classic appearance, simple, durable and practical, the best choice for commercial space.