

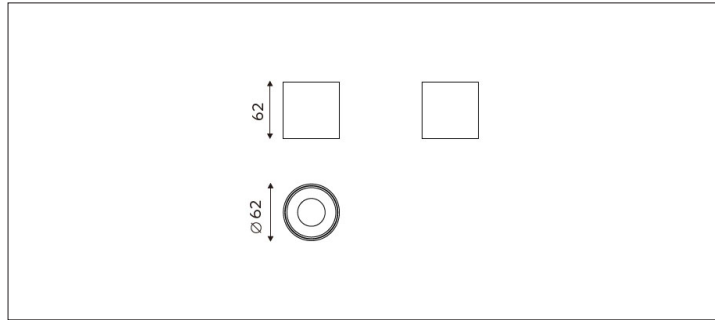


91.06215 T1a Surface Mounted Light



Light Distribution	T1a Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	18D/24D/36D/62D
Installation method	Surface Mounted
Connected Load	6W
Luminous Flux Of The Luminaire	617lm
Luminaire Efficacy	102.8lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
h(m)	E(lx)	D(m)
		24°
1.0	2076.73	0.42
2.0	519.18	0.83
3.0	230.75	1.25
4.0	129.80	1.67
5.0	83.07	2.08

Blends seamlessly into various environments with practical styles. Available in different wattages and sizes to meet diverse needs. Classic appearance, simple, durable and practical, the best choice for commercial space.