
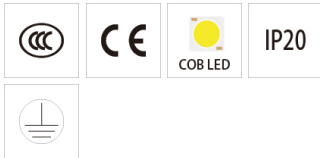
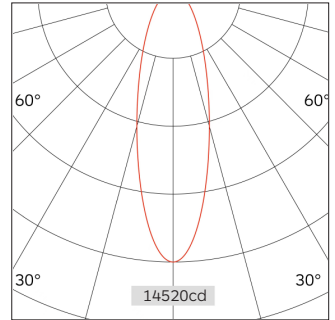


52.10025 Leko Recessed Downlight

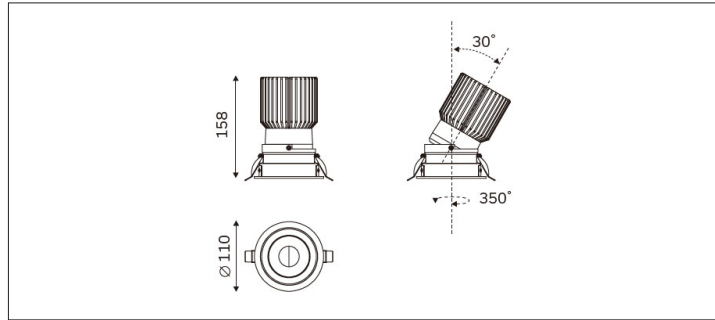

Light Distribution	Leko Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	21D/28D/42D/51D
Cut Out	100mm
Connected Load	32.6W
Luminous Flux Of The Luminaire	3802lm
Luminaire Efficacy	116.6lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	1Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
		28°
1.0	14520.90	0.50
2.0	3630.23	0.99
3.0	1613.43	1.49
4.0	907.56	1.99
5.0	580.84	2.48

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.