
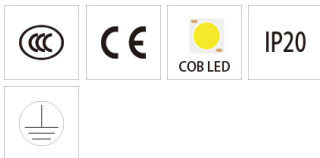
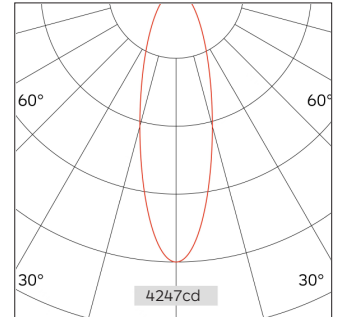


52.05 5 2 3 Intero Recessed Downlight

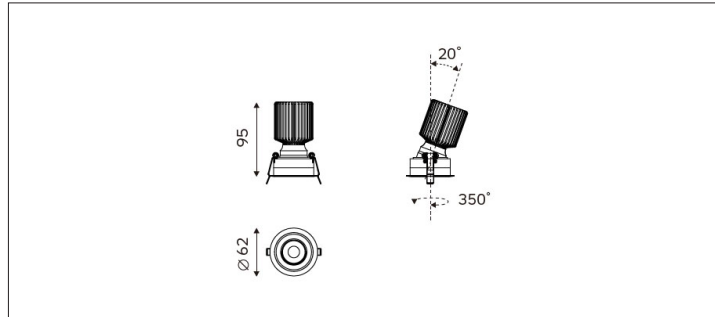

Light Distribution	Intero Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	27D/30D/43D/54D
Cut Out	55mm
Connected Load	10W
Luminous Flux Of The Luminaire	1173lm
Luminaire Efficacy	117.3lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.5Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		27°
1.0	4247.31	0.47
2.0	1061.83	0.93
3.0	471.92	1.40
4.0	265.46	1.87
5.0	169.89	2.33

Widely used in star hotels, high-end clubs, homes, offices and stores, Large shopping malls, chain stores and so on.