
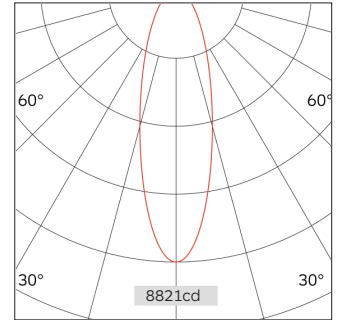


52.07 5 2 3 Intero Recessed Downlight

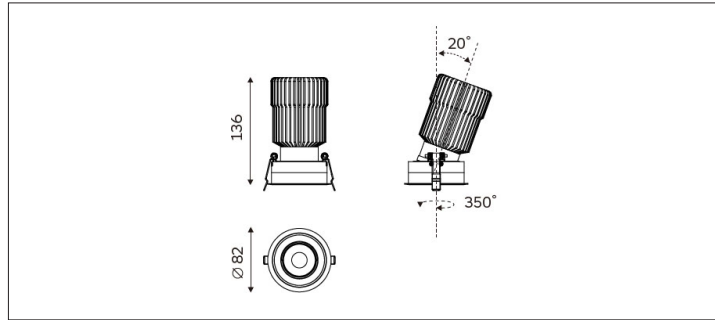

Light Distribution	Intero Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	32D/40D/48D/58D
Cut Out	75mm
Connected Load	32W
Luminous Flux Of The Luminaire	3653lm
Luminaire Efficacy	114.16lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.7Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
h(m)	E(lx)	D(m)
		32°
1.0	8821.25	0.58
2.0	2205.31	1.15
3.0	980.14	1.73
4.0	551.33	2.30
5.0	352.85	2.88

Widely used in star hotels, high-end clubs, homes, offices and stores, Large shopping malls, chain stores and so on.